

**SECTION VI**  
**EMPLOYERS REQUIREMENTS**

**VOLUME II**

**SECTION VI**  
**TECHNICAL SPECIFICATIONS**

## TABLE OF CONTENTS

|          |  |          |
|----------|--|----------|
| <b>1</b> | <b>GENERAL SPECIFICATIONS .....</b>                    | <b>1</b> |
| 1.1      | GENERAL .....  | 1        |
| 1.2      | DOCUMENT PRIORITY .....                                | 1        |
| 1.3      | COMPLETENESS OF CONTRACT .....                         | 1        |
| 1.4      | SPACE REQUIREMENT .....                                | 2        |
| 1.5      | DOCUMENTATION AND DRAWINGS .....                       | 2        |
| 1.5.1    | <i>General</i> .....                                   | 2        |
| 1.5.2    | <i>Bid Drawings</i> .....                              | 3        |
| 1.5.3    | <i>Progress Plans</i> .....                            | 3        |
| 1.5.4    | <i>Exchange of Interface Information</i> .....         | 3        |
| 1.5.5    | <i>Final Documentation</i> .....                       | 4        |
| 1.6      | CONTRACTOR'S QUALITY ASSURANCE PROCEDURES .....        | 4        |
| 1.7      | GUARANTEES AND PARTICULARS.....                        | 4        |
| 1.8      | MANUFACTURING AND SHIPMENT .....                       | 4        |
| 1.8.1    | <i>Places of Manufacture and Sub-Contractors</i> ..... | 4        |
| 1.8.2    | <i>Inspection and Testing</i> .....                    | 5        |
| 1.8.3    | <i>Packing, Transportation and Storage</i> .....       | 6        |
| 1.9      | ERECTION, INSTALLATION AND COMMISSIONING .....         | 6        |
| 1.9.1    | <i>Storage at Site</i> .....                           | 6        |
| 1.9.2    | <i>Work on Live Substations</i> .....                  | 7        |
| 1.9.3    | <i>Erection, Testing at Site, Commissioning</i> .....  | 7        |
| 1.9.4    | <i>Accommodation of Contractor's Personnel</i> .....   | 8        |
| 1.9.5    | <i>Health, environment and safety</i> .....            | 8        |
| 1.10     | TIME OF DELIVERY AND COMPLETION .....                  | 8        |
| 1.11     | ON THE JOB TRAINING .....                              | 8        |
| 1.12     | TOOLS .....  | 9        |
| 1.13     | SPARE PARTS .....                                      | 9        |

## **1 GENERAL SPECIFICATIONS**

### **1.1 General**

The scope of work, data sheets, special and general specifications constitute the complete technical specifications and must be read as a whole. If more than one contractor contributes to the completion of the plant each contractor is obliged to cooperate, adapt solutions and exchange information so that the plant forms a functional and optimised entirety.

### **1.2 Document Priority**

If in conflict, the ranking of documents in the technical specifications, in decreasing priority, is as follows:

1. Scope of Works
2. Particular technical specifications
3. Project Specific Design Data
4. General technical specifications
5. General specifications
6. Standards

In the event of any difference between the Drawings and the Specifications, the latter shall prevail. In the event of any difference between scaled dimensions and figures on the drawings, the figures shall prevail.

If the Bidder is of the opinion that there is conflict or disagreement between the particulars of the documents, standards etc., this must be clearly stated in the Bid, failing which, the materials and equipment offered shall be deemed to comply in every respect with the current Specification both in manufacture and in performance, and compliance thereof shall be insisted upon without additional cost to the Employer.

### **1.3 Completeness of Works**

- 1.1.1 All apparatus, accessories or fittings which may not have been specifically mentioned, but which are usual or necessary in the respective equipment for the completeness of the finished work in an operable status, shall be deemed to be included in the Contract and shall be provided by the Contractor without any extra charge. All equipment shall be complete in all details, whether or not such details are mentioned in the Specifications. This includes fixation details and connection clamps and/or terminals.
- 1.1.2 All materials and skilled labour, whether of temporary or permanent nature, required by the Contractor for the design, manufacture, erection and testing at site of the equipment shall be supplied and paid for by the Contractor. All computer equipment shall be delivered with all software and licences necessary to achieve the specified functionality as well as the software necessary for programming, testing, service and maintenance through the lifetime of the equipment.
- 1.1.3 Any reference in the quantity and price schedules, the delivery period schedule or in the various clauses and schedules of the text of either the Specification or the Bid, to any equipment shall imply equipment that is complete with all accessories, apparatus and fittings as outlined in sub clause 1.1.1 and 1.1.2 above.

The Contractor shall be responsible for ensuring that the equipment supplied is fit for the purpose intended. Available information on the characteristics of the system, to which the works will be connected and associated, will be supplied on request to the contractor who shall be responsible for obtaining and determining all applicable knowledge relevant to the works.

#### **1.4 Space Requirement**

The contractor shall utilise space economically and the arrangement of equipment in rooms and outdoor plots shall take into considerations future extensions and accessibility of equipment. The rooms and plots must accommodate the equipment as well as having workspace for operators and maintenance personnel.

#### **1.5 Documentation and Drawings**

##### **1.5.1 General**

Contractor's obligations with regard to preparation and submission of drawings, calculations, samples, patterns, models, etc. are stated in the Conditions of Contract.

The Contractor shall prepare and submit to the Project Manager for approval dimensioned general and detailed design drawings and other pertinent information of all the Plant and equipment specified in the Bid Documents. Unless otherwise agreed the information shall be exchanged on paper.

Approval of drawings shall not relieve the Contractor of his obligations to supply the Plant in accordance with the Specifications. The Contractor is responsible for any errors that may appear in the approved documents. He shall as soon as an error has been detected, deliver the corrected documents to the Project Manager for re-approval.

If the plant is to be connected to existing equipment the connection shall be documented in a coherent and overlapping way at least containing terminal identification in old equipment. Schematic diagrams shall contain complete loops within new and old equipment.

All text on documents provided by the Contractor shall be in the English language in addition, if necessary, to that of the country of origin. All drawings shall be dimensioned in millimetres.

The Contractor shall, during the total project time, maintain a List of Documentation to be updated by him whenever needed. The List of Documentation shall include the date of original issue of each document submitted as well as the dates of every revision. The List of Documentation shall also include a time schedule for the submittal of the documentation.

Symbols used for electrical equipment shall be in accordance with IEC 60617. The Contractor shall establish a coherent system for physical and functional reference designation in **accordance with IEC61346**. A similar systematic scheme shall be defined for cable numeration. These schemes shall be used throughout on the drawings and documentation and the designation shall be labelled on the components and cables.

In addition to what is stated in Conditions of Contract, the following shall apply:

- The sizes of all documents and drawings shall conform to the ISO standard, i.e.:

|    |               |    |               |
|----|---------------|----|---------------|
| A1 | 594mm x 841mm | A2 | 420mm x 594mm |
| A3 | 297mm x 420mm | A4 | 210mm x 297mm |
- Sizes larger than A1 shall be avoided. The schematic diagrams and, apparatus and cable lists shall be of size of A4 except for one original and possible transparency copies of schematic diagrams that shall be in A3. Scales to be used on the drawings shall be 1:10, 1:20, 1:40, 1:50 and multiples of this series.
- All drawings made special for this project including civil works drawings, mechanical drawings, layout drawings and circuit diagrams shall be compiled on a computer aided drawing system and as part of the as built documentation be handed over on a CD with a format readable in AutoCAD version 14 or another format to be agreed upon in addition to the paper copies.
- All drawings shall be bound in hard covers.

### 1.5.2 Drawings

The Employer's drawings attached to the Bid Documents are of informative character. These drawings are intended to illustrate the basic requirements to be satisfied. It is the responsibility of the contractor to prepare a detailed layout showing the manner in which the various items of equipment can be accommodated to best advantage within the available area.

The contractor is at liberty to offer arrangements based on significantly different principles where it is considered that these offer economic or technical advantages. It is emphasised, however, that the layout shall be subject to employer's acceptance.

### 1.5.3 Progress Plans

The Progress Plans shall at least contain the following milestones:

- Essential information delivered from Employer
- Documentation for approval from Contractor to Employer
- Release of factory documentation
- Factory Tests
- Shipment
- Site ready for erection
- Start erection
- Ready for pre-commissioning
- Ready for commissioning
- Test run
- Taking over
- Submittal of final documentation

### 1.5.4 Exchange of Interface Information

The Contractors shall in due time supply interface information to other sub-contractors where needed. The Contractor is in particular required to check that all foundations and fixations of his equipment is sufficiently dimensioned to meet the forces acting upon it. If the Contractor feels that he lacks such information from other contractors he is obliged to request such from the Project Manager. The Contractor cannot claim liability exemption for his own contractual responsibilities because of actions performed or omitted by other sub-contractors.

### **1.5.5 Final Documentation**

The Contractor shall supply final “as built” documentation taking into account all changes done under erection and commissioning.

The Contractor shall also deliver manuals for operation and maintenance. These shall at least contain the following information:

- Detailed description of the equipment, the individual components, relevant clearances, tolerances, allowable temperatures, settings etc.
- Descriptions of main principles including flow diagrams, single line diagrams, circuit diagram, connection diagram, cable schedules, software documentation etc.
- Operational instruction. These shall illustrate the operational sequences in a clear and concise way.
- Test and adjustment procedures containing instruction for test and adjustment of the equipment under operation, after inspection and maintenance
- Test reports
- Spare part lists
- Maintenance instructions split into:
  - Manuals for preventive maintenance indicating periodic inspections, cleaning, lubrication and other routine maintenance.
  - Repair manuals describing fault location, dismantling, re-assembly etc.

The documentation shall leave the operators and maintenance personnel in position to operate the plant in a safe and optimal way and to perform repairs usual to be done by such personnel. The Project Manager shall approve the manuals before final submission.

### **1.6 Contractor's Quality Assurance Procedures**

The Contractor shall have established a quality assurance system based on ISO 9001 also covering sub-contractors. The Contractor shall provide a documentation of the system with a list of current procedures, an organisation chart of the quality organisation and the name of the quality manager. He shall also submit a list of quality revisions performed in the last twelve months with a list of closed and unclosed findings as well as planned revisions during the coming twelve months as well as a list of findings. The documentation shall give special emphasises on how subcontracts are included in the quality assurance system. The Employer shall be entitled to perform quality revision at the Contractor or any subcontractor with two weeks' notice.

### **1.7 Guarantees and Particulars**

The Works shall comply with the technical guarantee data stated in the Bid. The Contractor shall be responsible for any discrepancies, errors and omissions in the particulars and guarantees.

### **1.8 Manufacturing and Shipment**

#### **1.8.1 Places of Manufacture and Sub-Contractors**

All equipment offered should be the product of recognised and experienced manufacturers and shall be of basic design and size similar to such that has been in successful continuous operation for at least three years preferably under similar climatic conditions. Proven plant reliability and high availability are of prime

importance and the attention of the Bidder is drawn to these particular requirements.

The manufacturer's identity and places of manufacture, testing and inspection before shipment for the various portions of the Contract Works shall be specified in the Technical Schedules and shall not be departed from without the agreement of the Project Manager.

As soon as practicable after entering into the Contract, the Contractor shall, having obtained the Project Manager's consent in accordance with the Conditions of Contract, enter into the Sub-contracts he considers necessary for the satisfactory completion of the Contract Works.

All Sub-contractors and Sub-suppliers of components and materials shall be subject to the approval of the Project Manager. Information shall be given on each Sub-order sufficient to identify the material or equipment to which the sub-order relates, stating that the material is subject to inspection by the Project Manager before despatch.

If the Employer at any stage in the design and production period finds out that the sub contractor do not fulfil the requirements in the specifications and it is obvious that the required quality cannot be achieved by corrective measure he can request the subcontract to be suspended and the works to be produced elsewhere without extra cost for the Employer.

### **1.8.2 Inspection and Testing**

The Contractor shall submit for approval a programme of quality control and inspection procedures to assure that the product during manufacture and on completion comply with the specified requirements. The programme shall relate the quality control and inspection activities to the production cycle. The Contractor shall provide details of quality control and inspection procedures used. The Contractor shall retain responsibility for quality control and inspection activities made by his sub-contractors and shall indicate on the programme, which items are to be sub-contracted and how they are to be inspected and tested both at subcontractor's works and by Contractor's acceptance control.

All materials used in the Contract Works are subject to inspection by the Project Manager and it is the Contractor's responsibility to advise the Project Manager when equipment and materials are available for inspection, at least one month in advance. Factory tests on equipment shall be made according to the applicable IEC Standards, or as specifically specified or according to standards approved by the Project Manager. Routine tests shall be made on each unit of all equipment.

Type tests shall be made on one unit of each type of different equipment. Instead of carrying out the type tests the Contractor may submit suitable certificates of tests made on equipment of the same type; however, the Purchaser reserves the right of accepting these certificates or to reject them partially or totally.

On complex systems the Bidder shall propose factory acceptance tests (FAT) to be performed.

The Project Manager shall be at liberty to demand any additional testing at the manufacturer's works, at site or elsewhere in order to verify that the equipment complies with the conditions of the Specifications.



A test programme shall be submitted to the Project Manager for approval at least one month ahead of the commencement of testing. The program shall include tests to be performed at sub contractor's works.

Measuring apparatus shall be approved by the Project Manager and if required shall be calibrated at the expense of the Contractor at an approved laboratory.

### **1.8.3 Packing, Transportation and Storage**

The Supplier shall provide such packing of the Goods as is required to prevent their damage or deterioration during transit and temporary storage up to their final destination as indicated in the Contract. The packing shall be sufficient to withstand, without limitation, rough handling and exposure to extreme temperatures, salt and precipitation. Packing case size and weights shall take into consideration, where appropriate, the remoteness of the Goods' final destination and the absence of heavy handling facilities at all points in transit. Indoor electrical equipment must be enclosed in welded polythene envelopes inside packing cases and the envelopes shall be evacuated or have a desiccant inside.

The following information must be clearly stencilled or printed on each packing case, crate, cask, drum, bundle or loose piece, care being taken that the number and other particulars on each package agree with those entered in the packing list accompanying the Invoice:

- Employer's Identity
- Supplier's Identity
- Destination
- Contract No.
- Package No.
- Item Code
- Weight, dimensions
- Sub-Project (Plant Identity).

The marking shall be durable. The marking shall be upon the body of the package. Marking upon a batten fastened on the case, etc. shall not be used.

In the case of bags, bundles and loose pieces, the shapes of which do not permit the marks to be put on the actual package, each bag, bundle or loose piece shall have two metal labels each with two holes. Securely fastened by independent wires. Each label shall be die-stamped with the above particulars.

Goods belonging to different plants shall not be mixed, but kept in separate packing cases, bundles or similar.

The Contractor shall be responsible for all transportation; from works to port of shipment and onwards to port of unloading, as well as all handling and transport to sites and handling on site.

## **1.9 Erection, Installation and Commissioning**

### **1.9.1 Storage at Site**

The Contractor shall be responsible for proper storage of equipment when delivered at the different sites until taking over. Care shall be taken to assure adequate storage to avoid damage to equipment due to rain or strong sunshine. The responsibility also covers security measures against theft and vandalism.

### **1.9.2 Work on Live Substations**

If work is to be done on substations in operation the following factors are of paramount importance: (i) Minimisation of outage time and (ii) adaptation to operational constraints. All work must be planned with this in mind. The Contractor must obey to all instructions and safety rules given by the Government and the Employer and must strictly follow all instructions from the Employer's supervisory personnel. The Contractor shall appoint his Project Manager/Technician who will be authorised to receive work permits at the work sites as required by safety rules. All outages shall be discussed with the Employer and the Project Manager at least one week before the outage is required. The Contractor will normally only be allowed to have only one high voltage circuit out of operation at a time. No work must start before Employer's site manager has authorised the work, established the required earthing and marked the safe area. All switching on live parts shall be done by the Employer. In the rare cases where more than one circuit have to be taken out of operation the Contractor must be prepared to do the work during nights or at off-peak time. The Contractor and his personnel must respect the physical constraints as well as constraints for scheduling set by these circumstances. However, the Employer will co-operate in making the work conditions and the scheduling as efficient as possible for the Contractor and keep a responsible person with switching authority at site during all working hours (including night time).

If physical constraints make it necessary to replace cabinets needed for operation, the Contractor must as far as possible erect and connect the new cabinets temporarily adjacent to the one in operation. A quick disconnection and removal of the old cabinets can then be performed and the new cabinets pulled in with most of its cables already fitted. Location of new cabinets shall be approved by the Project Manager and a proposal for such shall be given by the Contractor one month prior to erection.

### **1.9.3 Erection, Testing at Site, Commissioning**

The Contractor shall carry out erection, testing at site and commissioning of the Plants specified in the Specifications. All work, methods of work and workmanship, whether fully specified herein or not, shall be of the highest order in all respects, the generally accepted requirements and commonly recognised good practice for first-class work of the nature are to be adhered to.

The Contractor shall provide all staff, such as engineers, supervisory staff, skilled and unskilled labour necessary to carry out and complete the Contract Works on schedule as specified. Information regarding site staff shall be shown in the relevant Schedule.

The Contractor shall provide all vehicles, erection, tools and equipment necessary to carry out the Contract Works, including personnel transport. At the completion of the Contract, the Employer reserves the right, at his discretion, to take over vehicles, any tools, special tools, test equipment and other construction equipment used by the Contractor in connection with the Contract, at depreciated prices to be mutually agreed upon at that time.

Testing at site shall be carried out by experienced test engineers. Functional tests shall be inherent in all test procedures. The Contractor shall record the test results in an approved form in such a manner that the test reports can be used as the basis for future maintenance tests. Test methods and equipment shall be noted on the test sheets.

A complete test report in 4 sets shall be handed over to the Project Manager not later than one month after the Plant being commissioned. The test engineers shall at site keep a complete record of correction made during testing and one set of corrected drawings shall be kept at site after commissioning and one set handed over to the Project Manager.

Commissioning shall be carried out by the Contractor in the presence of the Employer's engineers and the Project Manager. The Contractor shall prior to commissioning draw up a detailed commissioning schedule for approval showing the sequence to follow step by step in all connections, including control of phase sequence and other pertinent factors. Switching of energized components will be performed by the Employer.

#### **1.9.4 Accommodation of Contractor's Personnel**

The Contractor shall make his own full provision for temporary accommodation of own and sub-contractor's employees to suit their requirements.

#### **1.9.5 Health, environment and safety**

The Contractor shall follow all local rules and regulations related to workers' safety and health as well as regarding protection of the environment.

The Contractor is responsible for employing a health worker to inform the workforce and affected villages about the increased health risks, especially HIV/AIDS.

The Contractor is also responsible for equipping all his workers with necessary safety equipment as helmets, eye protection glasses and safety belts and enforce the use of such

No toxic material (such as Halon, PCB, Asbestos) shall be utilised neither during construction nor under operation and maintenance.

The Contractor shall at all times during the course of work prevent accumulation of debris caused by the work. He shall also remove all debris and temporary structures when finishing the work. The Contractor shall also be responsible for removal of old equipment and cables. All surplus material should be disposed in an environmental satisfying way. Particular attention should be given to safe disposal of environmentally hazardous substances such as battery acid, transformer oil and capacitors. Workable equipment shall be handed over to the Employer.

#### **1.10 Time of Delivery and Completion**

The Implementation Schedule shown in the Bid Documents shows the completion of the project of which the equipment forms an integral part. The equipment must thus be delivered and erected in accordance with this schedule.

The guaranteed completion and delivery times shall be stated in the Bid and the guarantee therein signed by the Bidder. In addition the Bidder shall submit an erection program and estimate the necessary man-weeks for erection, alternatively erection supervision, testing and commissioning.

#### **1.11 On the Job Training**

The Employer shall be allowed to take part in erection, pre-commissioning and commissioning thus taking part in a transfer of knowledge scheme. Before the erection starts, the Contractor shall arrange a one-day course in understanding of the Contractors documentation and reference system.

The contractor shall also demonstrate to the operators all the operations of the substation before the tests run of the station.

**1.12 Tools**

The Supplier shall supply in lockable boxes, for the Employer's use, any special tools that may be required for assembly, dismantling adjustments and maintenance of the equipment. The tools shall be unused and in new condition at the time of handover. Suitable special spanners shall be provided for bolts and nuts, which are not properly accessible by means of an ordinary spanner.

**1.13 Spare Parts**

Spare parts supplied under the contract shall be packed and preserved for long time storage.

## TABLE OF CONTENTS

|          |   |          |
|----------|---|----------|
| <b>2</b> | <b>GENERAL TECHNICAL SPECIFICATION.....</b>                       | <b>1</b> |
| 2.1      | STANDARDS .....   | 1        |
| 2.2      | UNITS .....   | 1        |
| 2.3      | AUXILIARY POWER INTERRUPTIONS .....                               | 1        |
| 2.4      | SELECTIVITY.....  | 1        |
| 2.5      | DESIGN AND MATERIALS .....  | 1        |
| 2.5.1    | <i>General.....</i>   | 1        |
| 2.5.2    | <i>Electrical Equipment Materials.....</i>                        | 2        |
| 2.5.3    | <i>Bolts, Studs, Nuts, Screws, Washers, etc.....</i>              | 3        |
| 2.5.4    | <i>Surface Treatment and Painting, Electrical Equipment .....</i> | 3        |
| 2.5.5    | <i>Insulating Oil.....</i>  | 4        |
| 2.5.6    | <i>Sulphur hexafluoride gas (SF<sub>6</sub>).....</i>             | 4        |
| 2.5.7    | <i>Locking Devices and Padlocks .....</i>                         | 4        |
| 2.5.8    | <i>Nameplates and signs.....</i>                                  | 4        |
| 2.5.9    | <i>Tool Rack in the switchgear Room .....</i>                     | 4        |
| 2.6      | EQUIPMENT .....   | 4        |
| 2.6.1    | <i>Standardisation .....</i>                                      | 4        |
| 2.6.2    | <i>Degree of Protection .....</i>                                 | 5        |
| 2.6.3    | <i>Indicators and Instruments.....</i>                            | 5        |
| 2.6.4    | <i>Fuses and Miniature Circuit Breakers.....</i>                  | 6        |
| 2.6.5    | <i>Relays and Contactors.....</i>                                 | 6        |
| 2.6.6    | <i>Motors .....</i>   | 6        |
| 2.6.7    | <i>Motor control gear .....</i>                                   | 7        |
| 2.6.8    | <i>Computer Based Controllers.....</i>                            | 8        |
| 2.7      | CONSTRUCTION AND ERECTION.....                                    | 8        |
| 2.7.1    | <i>Switchboards, Panels and Cabinets .....</i>                    | 8        |
| 2.7.2    | <i>Wiring and Terminal Blocks within Enclosures .....</i>         | 9        |
| 2.7.3    | <i>Cable Laying and Routing.....</i>                              | 10       |
| 2.7.4    | <i>Earthing (Grounding).....</i>                                  | 11       |

## **2 GENERAL TECHNICAL SPECIFICATION**

### **2.1 Standards**

Ratings, characteristics, tests and test procedures, etc. for the electrical equipment encompassed by this Specification shall comply with the provisions and requirements of the standards of the International Electro-technical Commission (IEC), unless otherwise expressly stated in Particular Technical Specifications. Where the IEC standards do not fully cover all provisions and requirements for the design, construction, testing, etc. and for equipment and components that are not covered by IEC Recommendations, recognised national standards shall be applied. The rules of CEE (International Commission for the approval of electrical equipment) and the standards of CENELEC (Comité Européen de Normalisation Electrotechnique) may also be applied in such cases.

The latest revision or edition in effect at the time of Bid Invitation shall apply. Where references are given to numbers in the old numbering scheme from IEC it shall be taken as to be the equivalent number in the new five-digit number scheme. The Bidder shall specifically state the Precise Standard, complete with identification number, to which the various equipment and materials are manufactured. The Bid Documents do not contain a full list of standards to be used, as they only are referred to where useful for clarification of the text.

### **2.2 Units**

The SI-system (meter, Newton, second) shall be used throughout the works covered by this Specification.

### **2.3 Auxiliary Power Interruptions**

The Contractor shall ensure that the plants as a whole will function without interruptions if auxiliary AC power disappears. The plant shall be shut safely down by long interruptions in AC supply or by faults in the DC supply.

### **2.4 Selectivity**

The contractor is responsible for selectivity in the auxiliary AC and DC power circuits and shall present calculations proving the selectivity between main and sub distributions under maximum and minimum short-circuit levels.

### **2.5 Design and Materials**

#### **2.5.1 General**

Design and calculations shall be governed by the design criteria given in the Bid Documents, standards and normal design practice. Necessary safety factors shall be included. The supplier shall assure himself that the apparatus is suitable for intended use and the environment and stresses to which it will be exposed. He must also assure that the equipment is compatible with equipment it shall be connected to, or work together with.

The design shall be reliable and simple. The design shall incorporate every reasonable precaution and provision for the safety of the general public as well as for all those engaged in the operation and maintenance of the equipment itself or equipment connected to or installed in close proximity to it.

All apparatus shall be designed to ensure reliable and safe operation under the atmospheric conditions prevailing at the Site and under such sudden variations of load and voltage as may be met with under working conditions of the system. The

plant shall withstand without permanent weakening or deformation from short circuit current within the rating of the apparatus (including those due to faulty synchronising) as well as normal atmospheric over voltages taking into account the use of lightning arresters.

Special considerations shall be given to pressure rises by short circuits and fire risk. All material and equipment shall be designed and arranged so that over pressure will be relieved in a safe direction and so that fire risk is minimised and consequences of a fire reduced. The indoor 11kV switchboard shall be designed with a duct on top of the board for pressure release.

All plastic material used in boxes, panels and boards shall be halogen free and self-extinguishable.

The contract supplies shall be designed to facilitate inspection, cleaning and repairs and for operation, in which continuity of service is the first consideration.

All conductors and current carrying parts must be dimensioned with ample cross sections so that temperatures are kept within limits in operation and under short circuits. Temperature rises on all equipment shall be kept within limits set in IEC standards provided nothing else is specified. For all current carrying parts the permissible short circuit duration shall be at least 1 second. All electrical connections shall be secured by bolts or set screws of ample size, fitted with locknuts or lock washers of approved types.

The equipment shall as far as possible be factory mounted with internal cables and internal equipment installed before shipment. Plug-in components can be shipped separately.

Equipment for use outdoors or in wet or damp rooms shall be constructed so that water runs off. It shall also have devices draining any inside condensation that may form. Axial bearings on such equipment must be equipped with durable sealing preventing water to ingress.

### **2.5.2 Electrical Equipment Materials**

All materials supplied under this Contract shall be new and of the best quality and of the class most suitable for working under the conditions specified. They shall withstand the variations of temperature and atmospheric conditions arising under working conditions (including start and stop) without distortion deterioration or undue stresses in any parts and also without affecting the suitability of the various parts of the Works for which they were designed. The Plant shall be designed for a lifetime of 40 years. Equipment with a shorter life cycle shall be identified and so arranged that they are easy to replace.

No welding, filling or plugging of defective parts will be permitted without the sanction in writing of the Project Manager.

Materials that are susceptible to mould growth under tropical conditions shall be treated to exclude moisture and prevent growth of mould after all machining has been carried out.

Copper and aluminium used as electrical conductors shall be of the electrolytic type and comply with the respective ASTM or DIN Standards.

Cast iron shall not be used for chambers of oil-filled apparatus or for any part of the equipment that is in tension or subject to impact stresses. Exception is made where it can be shown that service experience has been satisfactory with the grade of cast iron and the duty proposed.

### **2.5.3 Bolts, Studs, Nuts, Screws, Washers, etc**

All bolts, studs, nuts, etc., shall have a standard metric threading and conform to the relevant standards as regards shape and tolerance. They shall be of Strength Class 8.8 and marked accordingly.

All bolts, studs, nuts, washers, screws, etc., used outdoor or in wet or moist environment shall be in stainless steel or hot-dip galvanised. If hot-dip galvanised bolts and nuts are used, special considerations shall be taken related to pre-stressing. Bolts, nuts, studs and screws that require frequent tightening and unbolting during inspection or maintenance procedures, shall be of stainless steel.

All bolts and nuts shall be hexagonal, either normally or of the round head socket type and secured in an approved manner against becoming loose during operation.

The Contractor shall supply the net quantities plus 5% of all permanent bolts, screws and other similar items and materials required for installation of the works at the site. Any such rivets, bolts, screws, etc. which are surplus after the installation of the equipment has been completed shall become spare parts and shall be wrapped, marked and handed over to the Employer.

Taper pins shall have threaded stems with nuts where dismantling of the pins is likely to be required.

Bolts shall not protrude more than 10 mm beyond the nut but not less than two full threads.

### **2.5.4 Panels and Support Structure Surface Treatment and Painting, Electrical Equipment**

Panel boards, cubicles, cabinets, etc. in dry rooms shall have interior surfaces painted with at least one priming and one finishing coat of anti corrosion paint. Exterior surfaces shall be adequately treated to be substantially corrosion resistant, with one priming coat, and two finishing coats.

Outdoor installations and indoor installations in wet and damp rooms shall at least have one priming coat and two layers of paint on zinc powder basis applied after perfect cleaning.

Structural supports outdoor and in wet or moist rooms and parts that cannot be readily painted, shall be hot-dip galvanised. All galvanising shall be in accordance with BS 729 or other internationally approved standards. Steel below ground shall in addition to galvanising be protected with Bitumen or a substance of similar quality.

The particulars of priming and finishing paintings shall be stated in the Bid, with specifications of paint, together with a listing of colours available, for each of the plant and equipment.

The Employer is not bound to accept the finishing colour proposed by the Bidder. Determination of colour shall be at the option of the Employer and shall be finalised at the time of approval of drawings.



### **2.5.5 Insulating Oil**

All electrical equipment requiring insulating oil or other insulating liquids shall be furnished with the first filling including flushing, if required. An excess of 10% of the net amount of oil or liquid required for each component shall also be furnished by the Contractor as spare.

The Contractor shall endeavour to employ, as far as practicable, one type and make of insulating oil only for all the electrical equipment.

### **2.5.6 Sulphur hexafluoride gas (SF<sub>6</sub>)**

The SF<sub>6</sub> gas shall comply with the requirements of IEC 60376. In addition to the quantity of gas required to fill the equipment supplied, 20% shall be supplied as spare.

The high-pressure cylinders for shipment and storage of the SF<sub>6</sub> gas shall comply with the applicable national regulations. All the necessary pipes, couplings, flexible tubes and valves for coupling to the switchgear for filling or evacuating all the gases to be used, with all necessary instructions for the storage of this equipment, shall be provided.

### **2.5.7 Locking Devices and Padlocks**

Facilities for applying safety or security padlocks to circuit breaker operating mechanisms, disconnecter and switch operating handles, control switches, control cubicles, outdoor cabinets etc. shall be provided for all equipment accessible by unauthorised personnel. The facilities shall be suitable for padlocks having a hasp diameter of 10 mm. Padlocks are not required.

### **2.5.8 Nameplates and signs**

Marking shall be in corrosion resistant material with permanent lettering. All equipment shall be marked in accordance with standards and local practice. The Contractor must mark all components in a clear and unambiguous way so that it can be related to the documentation. All operating mechanisms as pushbuttons, switches and handles must be marked in a precise way and necessary warning signs must be supplied.

All outdoor nameplates and signs shall be made of non-corrosive weatherproof material as trafolyte aluminium or stainless steel.

Letters shall be white and engraved on black background. For aluminium and steel signs black letters on metallic background shall be used. For warning signs red background shall be used.

### **2.5.9 Tool Rack in the switchgear Room**

A tool rack shall be installed in the switchgear room for all the, handles and tools required for operation of the switchgear including panel/marshalling boxes keys. The rack shall be easily accessible to operators and not cause obstruction to operations.

## **2.6 Equipment**

### **2.6.1 Standardisation**

The Contractor shall be responsible for the standardisation of all small mechanical and electrical equipment, materials and devices for the Works. He shall arrange and perform the necessary co-ordination work with his subcontractors for the purpose of

such standardisation. Such equipment, devices, fittings, etc. shall comprise, but not necessarily be restricted to, the following:

- Programmable controllers, control devices and control switches
- Electrical instruments and meters
- Terminals and terminal blocks
- Primary, secondary and auxiliary relaying devices
- Contactors, fuses, miniature breakers and the like.
- Lamps, bulbs, sockets, plugs, etc.
- Lubricants
- Oil

### 2.6.1.1 Electrical Sockets

Single phase electrical sockets installed for lamps, hand tools, measuring equipment etc., shall be square pintype with earth connection. The sockets shall be rated for at least 16A (lower rating shall not be used). Other sockets shall be according IEC 60309 (CEE type). The Contractor shall endeavour to use components available in the local market.

### 2.6.2 Degree of Protection

Enclosures for electrical equipment shall have the following degree of protection (ref IEC 60034, IEC 60059, IEC 60529 and IEC 60947):

- |  |                                    |
|--|------------------------------------|
| • Motors/Motor Terminal boxes                  | IP 54/IP 65                        |
| • Dry Transformers                             | IP 2x                              |
| • Limit switches                               | IP 65                              |
| • Indoor switches                              | IP 5x                              |
| • Outdoor switches                             | IP 54                              |
| • Medium voltage enclosed switchgear           | IP 42 (IP 20 with front door open) |
| • Low voltage switchgear and control cabinets: |                                    |
| • Indoor                                       | IP 3x                              |
| • Outdoor                                      | IP 54                              |
| • With open door                               | IP 20                              |
| • Junctionboxes                                | IP 65                              |
| • Light fittings                               |                                    |
| • Outdoor and wet areas                        | IP 4x                              |
| • Indoor                                       | IP 2x                              |

### 2.6.3 Indicators and Instruments

All status and position indication lamps shall be of the light emitting diode type and be replaceable without use of soldering or special tools.

In un-manned operation a switch shall be arranged for turning off the indication lights for the substation. A switch for lamp test shall be arranged.

All indication contacts shall be galvanic isolated and potential free.

Temperature indicators shall be of the PT 100 type protected to suit the environment where it is to be used.

Pressure indicators shall be of corrosion proof material, IP 54, vibration class 1. The scale shall indicate bar or equivalent m water column. The diameter shall be 160

mm and the measuring pipe shall be equipped with stop chock. If the indicator is exposed to vibration it shall be filled with damping liquid (glycerine).

Limit switches for pressure, temperature and flow (even if combined with the indicators) shall be of class 1 without noticeable hysteresis. Where more than one limit is required each limit shall be independently settable. Set points shall be easily readable.

Flow meters shall be graded in litres/s from zero to well above required value. Flow meters for water shall be electronic without moving mechanical parts.

Panel instrument shall be accuracy class 1.5 or better, dimensions 96x96 mm with non-reflective glass. Measuring converters shall be of accuracy class 0.5 with 4-20 mA output, DC auxiliary voltage and galvanic isolated potential free output.

All semaphores shall be of LED type.

#### 2.6.4 Fuses and Miniature Circuit Breakers

Miniature circuit breakers shall replace fuses in control and power circuits 63 amps and below. They shall be approved as circuit breakers and have a breaking capacity sufficient to break the short circuit at the place of use (i.e. no upstream backup fuses for reduction of fault level shall be necessary). All circuit breakers used in DC circuits must be approved for the relevant DC voltage and current.

Where nothing else is specified, LV power fuses above 63 amps shall be of high rupturing capacity cartridge, type NH gl, according to DIN VDE 0636 and IEC 60269. All fuse bases shall have a load switching capacity and a thermal rating equal to the rating of the largest fuse it can accommodate. Fuse replacement shall be possible without use of special tools and with IP 20 protection against live parts.

#### 2.6.5 Relays and Contactors

All resetting of relays and contactors must be possible without dismantling of any covers and without risk for electrical shock. All contactors and relays used in DC circuits must be approved for the relevant DC voltage and current.

Limit switches not mounted in enclosures shall be of the proximity type without need for separate power supply and equipped with light emitting diodes to indicate position.

#### 2.6.6 Motors

##### 2.6.6.1 General

As far as possible and if nothing else is specified, motors shall be three phase squirrel cage motors complying with IEC 60034 and with dimensions according to IEC 60072. Such motors shall have the following data:

|   |                          |
|---|--------------------------|
| Continuous rating   | 130 % of mechanical load |
| Frequency band for continuous rated operation without exceeding temperature class | 47 – 57 Hz               |
| Voltage band for continuous rated operation without exceeding temperature class   | -15 % - +10 %            |
| Maximum start current with direct start   |                          |
| Motors above 75 kW  | 5 x I <sub>n</sub>       |
| Motors between 35 and 75 kW   | 6x I <sub>n</sub>        |
| Insulation class  | F                        |

|                       |                  |
|-----------------------|------------------|
| Temperature rise      | B                |
| Direct starting range | 75 – 110 % of Un |

Motors shall have sealed ball or roller bearings. If the bearing is not sealed for life it shall withstand two years of operation before refill of lubricants.

Outdoor motors and motors erected in moist environment shall be equipped with still-stand heaters controlled from the starter. The heater shall be so dimensioned that maximum temperature is not reached even if the heater remains connected under operation.

Motors shall withstand three consequent starts without overheating. Motors over 20 kW shall be equipped with thermistor based temperature protection.

The three line connections of A.C. motors shall be brought out to a terminal box sealed from the motor. The terminal arrangement shall be suitable for the reception of aluminium and copper cable. A permanently attached diagram or instruction sheet shall be provided giving the connections for the required direction of rotation. If only one direction of rotation is permitted, this shall be clearly marked.

Motors to be connected to variable speed drives shall be special adapted to this.

#### 2.6.6.2 Special Motors

Other types of motors shall only be used where squirrel cage motors are inconvenient to use (and then only after approval by the project manager) or if DC motors are specified. Such motors shall as far as possible follow the requirements set above.

Brushes shall be designed with a constant brush pressure and shall withstand at least 5 000 hours of operation before they have to be replaced. It shall always be at least two brushes in parallel and the brush-holders shall not touch the commutators when the brushes wear out. The press fingers shall not carry the current and each brush shall be separately adjustable.

Where single phase motors are used the motors shall be grouped so as to form, approximately, a balanced three phase load.

#### 2.6.7 Motor control gear

Control gear shall comply with the requirements of IEC 60947, the control gear being rated according to the duty imposed by the particular application. No replacement of equipment shall be necessary after short circuit (ref. IEC 60947)

Motor contactors shall comply with IEC 60947 class of intermittent duty 0-3 and utilisation category AC4. The contactors, and their associated apparatus shall be capable of switching the stalled current, and shall have a continuous current rating of at least 50% greater than the full load current of the motors they control.

The operating currents of overload trips fitted to motor contactors shall be substantially independent of ambient temperature conditions, including the effect of direct sunlight on the enclosure in which the contactors are installed.

Where small motors are connected in groups, the group protection shall be arranged so that it will operate satisfactorily in the event of a fault occurring on a single motor.

Each motor or group of motors shall be provided with control gear for starting and stopping by hand and automatically. Overload and single-phasing protection shall be provided. Facilities for padlocking the supply in off position shall be provided.

### **2.6.8 Computer Based Controllers**

Computer Based Controllers inclusive Programmable Logical Controllers (PLC) can be used for individual control functions. Such equipment shall be designed for industrial environment and application in high voltage plants. The control equipment must be fed from the general station DC supply.

The control equipment must be equipped with internal “watchdog” function giving external potential free alarm by internal fault. The operational status shall be frozen by fault or un-normal function so it can be re-established after restart. The process must be shut down to a safe stage if fatale faults occur in the controller.

Analogue and digital in- and out puts must be galvanic isolated and potential free and must, together with the enclosure, screen against disturbance from electromagnetic field occurring by short-circuit, switching over voltages or lightning discharges. The control equipment shall be tested according IEC 60255 and fulfil relevant EMC requirements for Industrial Environment.

Digital in- and outputs shall be tested and approved for switching of DC voltages supplied by the main plant battery (AC values are irrelevant).

Programmes shall be stored in “flash ram” or similar storage medium and shall not be destroyed or changed by power failure (i.e. Separate backup battery shall not be used). The memory shall contain the last program version.

All programming of control sequences shall be documented in a self-explanatory way not requiring special program knowledge for understanding (function block programming or similar)

Communication between various controllers (and the main control system) can be over fibre optical cable provided agreement between the contractors. Such communication must use open protocols to be approved by the Project Manager. The Bidder shall in any case present a verification of transmission quality.

The Controllers shall be delivered with software and software licences needed for testing, setting ad reconfiguration. If hardware other than laptop is required for this such shall be included in the supply.

## **2.7 Construction and Erection**

### **2.7.1 Switchboards, Panels and Cabinets**

Switchboards, control, panel boards and cabinets shall be of robust construction, formed of a steel frame and covered with smooth steel plate (outdoor cabinets can be of aluminium). The steel plate shall be properly stiffened to prevent distortion. Panels shall normally be covered at their rear with hinged doors. The frames of the boards shall be designed to permit firm anchoring on the floor. The frames shall permit easy erection, and allowance shall be made for extension of the board by similar additional panels. Panes for power circuits shall be in accordance IEC 6034 (minimum partly type tested apparatus (PTTA)). All enclosures shall be ventilated

so that the temperature inside the enclosure do not raise more than 5 °C above ambient even with possible heaters connected.

Outdoor-cabinets and cabinets for moist environments shall be provided with thermostat-controlled heaters to inhibit collection of moisture. The heater must be arranged not to overheat any cables or equipment. Openings for drainage of condense shall be provided at the lowest point in the cabinets.

All major or important compartments containing electrical equipment shall be provided with a single phase 16 A square pin socket and internal lighting facilities switched off by a door switch.

Unless otherwise specified or agreed upon, all instruments, apparatus and devices on the panel fronts shall be provided for flush mounting. Flush mounted relays shall be provided with transparent cover. The cover shall be hinged to allow resetting and adjustment. All terminals and all equipment shall be accessible without dismantling other components. Equipment shall not be mounted in swing-out doors. However, proper swing out frames may be used provided they can be opened will full load without twisting or distorting the panel. Windows shall be provided in front of rack mounted equipment.

### **2.7.2 Wiring and Terminal Blocks within Enclosures**

All wiring shall be stranded flexible copper conductor, PVC with steel armour. Insulated, suitable for operation at voltages below 1000 V and in compliance with the provisions of the applicable IEC Recommendations. Conductors shall not be smaller than 2.5 mm<sup>2</sup> for current transformer circuits and 1.5mm<sup>2</sup> for all other control circuits. The selection of conductor sizes for current transformer circuits shall be supported by calculations.

For wiring within boards the "bunch" pattern shall be adopted. For a small number of connections, wiring may be grouped using flexible plastic bands or equivalent. For a large number of connections a system using support strips or U-shaped troughs (with covers) shall be used. Ample space shall be provided for running of cable within the enclosures.

The screens or screened pairs of multicore cables shall be earthed in accordance with a coherent earthing philosophy to be worked out by the main Contractor and approved by the Project Manager. The screen and earth wires shall be terminated in terminals dedicated for this use. All free conductors in connecting cables shall be terminated in terminals that shall be temporarily connected to earth and special marked. Though, in field boxes the free conductors can be laid orderly and short-circuited or insulated. The length shall allow future connection.

Multi-stranded conductor ends shall be fitted with a suitable crimped thimble (bootlace ferrule type). The thimble shall be of correct type and length according to the core size and crimp tools shall be specially adapted to the thimble and cross section used. Each wire shall be separately terminated unless otherwise approved.

It shall be possible to work on small wiring for maintenance or test purposes without making a switchboard dead.

The wiring identification shall be by numbered ferrules, sleeves or other approved means.

All wiring shall terminate at terminal blocks, the latter shall be of the moulded type not less than IP20 and provided with barriers to separate power from control cables. It shall be possible to replace a single terminal block without dismantling a whole row. They shall be clearly marked, the designations being those entered in the respective wiring diagrams. Terminal blocks using screws acting directly on the wire (conductor) as well as spring type terminal blocks are not acceptable. To avoid squeezing of the wire the screw pressure shall be applied by a pressure plate having smooth edges. 'OBA' terminal blocks are not acceptable. Only terminal blocks that are operated using screw drivers are acceptable.

Terminal blocks for current and voltage transformers shall be separated and specially marked. They shall be equipped with a sliding splice for separation and "banana" sockets on both sides for testing. The splices shall be so arranged that they fall into closed position when loose. Where appropriate, other terminal blocks shall be equipped with facilities for testing, such as short-circuiting, separating splices, plugs, etc. All such device shall be accessible even when paralleling strips are used.

Only one conductor shall be connected to each side of a terminal block and the branch-offs shall be made by interconnecting the necessary number of neighbouring blocks by means of copper strips.

Terminal blocks shall be located at least 300mm from the bottom of the panel and shall be easily accessible. Terminal blocks for different voltages shall not be mixed between one another. All conductors in a multi-core cable shall be terminated on the same terminal block. The blocks shall be grouped for each voltage and they shall be clearly marked for easy identification of the system voltage. There shall be at least 20 % spare terminals on each block.

### **2.7.3 Cable Laying and Routing**

The final routing of HV and LV cables in indoor and outdoor installations shall be determined by the Contractor from the directives given in Particular Specifications, and the principles shown in the layouts on the drawings. All cable routing and arrangement shall be subject to the Project Manager's approval and must adapt to obstacles as tubes and ventilation channels. All penetrations of fire zone separations shall have the same fire classification as the separation itself.

Cables shall be laid on corrosion resistant (aluminium or hot dipped galvanised) cable trays and racks and by raising cables fixed to cable ladders. The trays shall be dimensioned and fixed so that it allows one man to climb on it in addition to the cable load. Each tray shall have at least 15 % spare capacity. The distance between each tray shall at least be 300 mm. For exposed outdoor installations cables shall be laid in covered cable trenches, plastic or steel ducts, depending on the available space.

Branch offs to individual equipment shall be fixed and supported all the way to the connection box. Cables and cable supports shall be properly fixed and secured against movement under short-circuit and strain caused by erection work. Particular attention shall be given to termination in confined areas where personnel may climb under erection and maintenance. Flexible tubes of "spiral type" shall not be used whereas tubes of "plica" type can.

Low power cables, i.e. cables for control, metering, etc. shall not be run in close parallel to high power cables or earth wires, but shall be run at the greatest possible separating distance. The minimum distances are:

- High and medium voltage versus control and measuring cables 800 mm
- Low voltage power cables versus control and measuring cables 400 mm

Necessary EMC consideration shall be taken in accordance with EMC standards.

Additionally, cables for extra low power, i.e. mA and mV circuits and cables connected to low power solid state electronic circuits, shall be laid in separate sheet steel trays with covers. The DC trip and AC voltage supplies and wiring to main protective gear shall be segregated from those for back-up protection to the greatest extent possible.

Single-phase power cables shall be run in trefoil configuration, single-phase DC power cables shall be run in parallel. Special care shall be taken so that closed magnetic circuits do not form around single phase cables.

Cables below 25 mm<sup>2</sup> cross section shall be copper. Larger cross sections may be aluminium. Minimum cross sections shall be as follows:

- Measuring cables for current 2.5 mm<sup>2</sup>
- Control and other measuring cables 1.5 mm<sup>2</sup>
- Power cables according 120 % max load current

All cross section must be checked against max load current, allowable burden on measuring transformers, short circuit values, voltage drop, protection requirements and selectivity.

The cables shall be marked with item designation in both ends as well as by entrances in enclosures. The cable marking shall be fire proof.

Cables shall be laid in full runs and not spliced unless approved by Project Manager. Termination of multi-stranded conductor ends shall be with a suitable crimped thimble as specified above. All other cable lugs or similar shall be of crimped type adapted to the cable type and cross-section used. The tools used should be special approved for the lugs and cable type used.

The cable supplier's instructions regarding handling and bending radius shall be followed.

Fibre optic cables shall not contain metallic material and be so laid that they have proper mechanical protection. I.e. cables not constructed for embedding shall be laid in protective tubes.

#### **2.7.4 Earthing (Grounding)**

An embedded earthing system shall be designed and supplied by the contractor. The embedded earthing system shall be arranged connected to exposed and accessible earthing bars. From here an exposed earthing system shall be arranged. The Contractor is responsible for installation and connecting of his equipment to this network so that all precautions are taken regarding safety (ref. National regulations) and shielding against disturbances. Cables shall be earthed and shielded in accordance with earthing philosophy worked out by main switchgear contractors. For details of the earthing system refer to clause 4.1.2.7



## TABLE OF CONTENTS

|          |  |          |
|----------|--|----------|
| <b>3</b> | <b>PROJECT SPECIFIC DATA .....</b>                             | <b>1</b> |
| 3.1      | DEFINITIONS.....   | 1        |
| 3.1.1    | <i>Design Data, High and Medium Voltage.....</i>               | <i>1</i> |
| 3.1.2    | <i>Design Data, Low Voltage Equipment .....</i>                | <i>2</i> |
| 3.1.3    | <i>Phase Relationship .....</i>                                | <i>2</i> |
| 3.1.4    | <i>Colour Coding .....</i>                                     | <i>3</i> |
| 3.1.5    | <i>Environment .....</i>                                       | <i>3</i> |
| 3.1.6    | <i>Noise .....</i>   | <i>4</i> |
| 3.1.7    | <i>Auxiliary Power .....</i>                                   | <i>4</i> |
| 3.1.8    | <i>Electric Service During Construction .....</i>              | <i>4</i> |
| 3.1.9    | <i>220 V AC Un-interrupted supply (UPS) .....</i>              | <i>5</i> |
| 3.1.10   | <i>Operation and Control.....</i>                              | <i>5</i> |
| 3.1.11   | <i>Interface between Contractors and towards Employer.....</i> | <i>6</i> |

### 3 PROJECT SPECIFIC DATA

#### 3.1 Definitions

Whenever the following terms or words are found in the specifications and/or other documents, they shall have the following meaning:

"High Voltage Equipment" (HV):

Mostly used for equipment provided for a maximum operating voltage higher than 52.5 kV (generically also used for voltages down to 1000 V).

"Medium Voltage Equipment" (MV):

Equipment provided for a maximum operating voltage higher than 1000 V and up to 52.5 kV.

"Low Voltage Equipment" (LV):

Equipment provided for operation at 1000 V or below. (For transformers the term Low Voltage Winding is used for the side with lowest rated voltage regardless value)

AC means Alternating Current, DC means Direct Current, Where protection degree IP xx is mentioned it shall generally be according to IEC 60529 "Degree of Protection Provided by Enclosure".

#### 3.1.1 Design Data, High and Medium Voltage

The rating and design criteria for the HV and MV plant and equipment shall be as follows:

| Item | Parameters  | SYSTEM VOLTAGE |         |       |        |
|------|---|----------------|---------|-------|--------|
|      |   | 132kV          | 66 kV   | 33kV  | 11 kV  |
| 1    | System  | 50 Hz, 3 phase |         |       |        |
| 2    | Neutral point earthing  | Solid earthed  |         |       |        |
| 3    | Nominal voltage of networks   | 132 kV         | 66 kV   | 33 kV | 11 kV  |
| 4    | Highest system voltage as defined by IEC-60038  | 145 kV         | 72.5 kV | 36kV  | 12 kV  |
| 5    | Short circuit and earth fault current, symmetrical r.m.s. value (min breaking current) not less than              | 31.5 kA        | 31.5 kA | 25kA  | 25 kA  |
| 6    | Thermal short-circuit current, 3 second not less than   | 31.5 kA        | 31.5 kA | 25kA  | 25kA   |
| 7    | Dynamic peak current (min making current)not less than  | 80 kA          | 80 kA   | 63kA  | 63 kA  |
| 8    | Rated current of busbars and bus coupler if not given in Scope of Works, for each individual substation           | --             | 1250 A  | 1250A | 1250 A |
| 9    | Minimum rated current of isolating switches and circuit breakers if not given in Scope of Works                   | 2,000 A        | 800 A   | 800A  | 630 A  |
| 10   | Insulation level according IEC 60071:   |                |         |       |        |
| 10a  | Switching surge withstand voltage   |                |         |       |        |
|      | Phase-to-earth  | N/A            | N/A     | N/A   | N/A    |
|      | Longitudinal impulse component of combined test   | N/A            | N/A     | N/A   | N/A    |
| 10b  | Lightning impulse withstand voltage (1.2/50 m/s $V_{peak}$ )  | 650 kV         | 325 kV  | 170kV | 75 kV  |
| 10c  | Test voltage at power frequency 1 min dry and wet. To earth and between phases                                    | 275 kV         | 140 kV  | 70kV  | 28 kV  |
| 11   | For the design and erection of the conductors in the switchyard the following minimum distances shall be observed |                |         |       |        |
| 11a  | Phase to earth [mm]   | 1 270          | 700     | 500   | 500    |
| 11b  | Phase to phase [mm]   | 1 475          | 790     | 435   | 250    |
| 11c  | Busbars phase to phase [mm]   | 3 000          | ----    | ----  | 1250   |
| 11e  | Height to live parts above ground [mm]  | 5 000          | 3500    | 2900  | 2900   |
| 11f  | Height to live parts above ground at transformer transport routes [mm]  | 5000           |         |       |        |

| Item | Parameters   | SYSTEM VOLTAGE  |       |      |       |
|------|--|---|-------|------|-------|
|      |  | 132kV   | 66 kV | 33kV | 11 kV |
| 11g  | Lowest part of insulators above ground [mm]                              | 5000  | 2 500 |      |       |
| 12   | Maximum temperature rise of conductors above ambient temperature (40 °C) | 40 °C   |       |      |       |
| 13   | Maximum wind pressure on conductors and cylindrical objects              | 400 N/m <sup>2</sup>  |       |      |       |
| 14   | Maximum wind pressure on flat surfaces                                   | 820 N/m <sup>2</sup>  |       |      |       |
| 15   | Minimum nominal creepage distance as defined in IEC 60815, Table II      | 25 mm/kV (inland area)<br>31 mm/kV (in coast and industrial area) |       |      |       |

Note 1)  
Ref IEC 60038)

Note 2)  
For all current carrying parts the permissible short circuit duration shall be at least 1 second. Indoor equipment shall be arch tested in accordance with IEC 60298 amendment 2. The dynamic or momentary short circuit current on which the equipment design shall be based; shall be computed by multiplying the r.m.s. value of the symmetrical short circuit current by the factor  $1.8 \times \sqrt{2}$ .

Note 3)  
Ref IEC 60071)

All High and Medium Voltage equipment shall be designed for installation at 2200 m above sea level. IEC 60071 shall apply with the specified correction factor for the altitude above sea level.

### 3.1.2 Design Data, Low Voltage Equipment

Low voltage installation shall be in accordance with EMC directives. The rating and design criteria for low voltage equipment shall be as follows:

|                                    |   |
|------------------------------------|---|
| AC Voltage                         |   |
| Nominal system voltage             | 415/240 V -15%,<br>+10% (+ or - 6%),<br>TN - CS |
| System frequency                   | 50 Hz (+ or - 2%)                               |
| DC System                          | 110V,& (48V for<br>communication)               |
| Power frequency Test Voltage 1 min | 2.5 kV  |
| Thermal rating of conductors       | 120 % of load                                   |
| Max short-circuit Current          | 25 kA   |

AC LV equipment can, after the Project Manager's approval, be rated for lower short-circuit current if calculation demonstrates that lower values are applicable at the place of installation. DC equipment shall be adapted to the actual values at sites as shown in calculations.

### 3.1.3 Phase Relationship

The phase relations and designations shall be in accordance with the existing system of the Employer. The phase sequences will be made known to the Contractor at a later date, but not later than 1 month from date of commencement. The standard phase colours are Red, Yellow, Blue (RYB).

### 3.1.4 Colour Coding

All wires must have ferrules at all terminations to distinguish each signal. In addition the wires shall have the following colours:

| Circuit              | Colour of Wire           |
|----------------------|--------------------------|
| Voltage transformers | Red                      |
| Current transformers | Black                    |
| A.C. Circuit         | Yellow                   |
| D.C. Circuit         | Blue                     |
| Grounding circuit    | Green with yellow stripe |

(Following coloured ferrules shall be provided on each wire in order to identify phase and polarity.

| Phase and Polarity  |              | Colour of ferrules       |
|---------------------|--------------|--------------------------|
| A.C.                | First phase  | Red                      |
|                     | Second phase | Yellow                   |
|                     | Third phase  | Blue                     |
|                     | Neutral      | Black                    |
|                     | Grounded     | Green with yellow stripe |
| Auxiliary DC Supply | Positive     | Red                      |
|                     | Negative     | Black                    |

Ferruling system should be submitted to the Employer for approval before commencement of works.

### 3.1.5 Environment

Unless otherwise specifically stated in Particular Technical Specifications or Scope of Works, any equipment, component and assembly shall be designed for the following service conditions:

| Parameter   | Max                       | Min                 |
|---|---------------------------|---------------------|
| Ambient air temperature   |                           |                     |
| Outdoor   | +40°C                     | -1°C                |
| Indoor  | +40°C                     | -1°C                |
| 24 hour average maximum   | +30°C                     | -1°C                |
| Ambient temperature for cables in the ground                        | +40 °C                    | -1°C                |
| Relative humidity   | 90%                       |                     |
| Height above sea level  | 2200 m                    | Below 1000m         |
| Cooling water temperature   | N/A                       | N/A                 |
| EMC Class (IEC 61000)   | Industrial environments   |                     |
| Seismic coefficient   | 0.15                      |                     |
| Wind pressure on project area of conductors and cylindrical objects | 430 N/m <sup>2</sup>      | 383N/m <sup>2</sup> |
| Maximum wind pressure on steel members on 1.5 times projected area  | 820 N/m <sup>2</sup>      |                     |
| Rainfall conditions   |                           |                     |
| Average   | 800-1700 mm/year          |                     |
| Maximum   | 160mm in 24 hrs           |                     |
| Annual mean isokeraunic level                                       | Max 180 thunderstorm days |                     |
| Pollution (IEC 60815)   | Heavy :class II           |                     |

Wherever any of these maximum or 24 hour average temperatures exceed the normal service condition temperatures of the IEC Recommendations for the relevant equipment, or of such other standard which is approved to be applied, the permissible temperature rises of the IEC Recommendations or the standard shall be reduced by the same amount as the difference between the above figures and the normal service condition temperatures. The Contractor shall guarantee these reduced temperature rises.

All air cooled equipment shall be cooled with convection (i.e. without fans) provided other cooling methods are not explicitly allowed for in the specifications.

### 3.1.6 Noise

The equipment shall as far as possible not generate undue vibrations or bothersome noise. Provided nothing else is specified the following requirements shall not be exceeded:

- Machine hall, workshop etc. (one meter from the machine) max 85 dB(A)
- Office, control room, day room etc. max 55 dB(A)
- Emergency diesel generator (7 meter from engine room) max 85 dB(A)

### 3.1.7 Auxiliary Power

#### 3.1.8 Electric Service During Construction

The contractor shall ensure the availability of metered electric supply at 415/240V, 3-phase, 50 Hz TN-S at the substation sites. All tools and equipment supplied by the Contractor shall be suitable for this supply system.

##### 3.1.8.1 Power Supply

On HV substations the power for the auxiliary service is in general supplied from the station transformers connected to the tertiary windings of the transformers whereas on MV substations the, power is supplied from station transformers connected to the MV busbars. The system is shown in detail on the single-line diagrams enclosed in the drawing section and further specified in Scope of Work. Less important MV substations may take the auxiliary voltage from the general surrounding grid. Equipment needing uninterrupted supply shall be fed from permanently charged station batteries. If other voltage sources or voltage levels are required, they shall be included in the Bid. Such voltages shall not be brought out of the cabinet where they are used.

All the substations that have more than one source shall have an automatic change-over scheme for the two 415V power supply sources at the substations

##### 3.1.8.2 AC Auxiliary Supply

Components in the AC low voltage main distribution system shall have a voltage rating of 415/240 volts, 50 Hz. The system shall be 3-phase, the transformer neutral grounded (TN-CS)

For lighting, small power socket outlets, domestic appliances and other small power, 230V shall be used. 16 A sockets shall be of the British Standard type with square pins.

##### 3.1.8.3 DC Auxiliary Supply

The DC auxiliary supply shall be (unless otherwise stated in Scope of Works):

- For control, protection and alarm circuits 110V-IT

All bulbs and any voltage sensitive relays shall be rated 125/52 VDC.

### 3.1.9 220 V AC Un-interrupted supply (UPS)

DC/AC UPS shall supply dedicated computer and measuring equipment. The supply shall be 230 V – IT.

### 3.1.10 Operation and Control

The operations, control procedures, monitoring and protective devices for the plants are described in Particular Technical Specifications.

The Contractor shall take all measures and furnish all requirements necessary for effecting the intended method of operation and control.

The station functional control shall be possible in a hierarchic structure as follows:

- Supervisory Control from a Supervisory Control and Data Acquisition (SCADA) System. The old system is outdated and a new will be established where 66 kV and below will be connected to Regional Control Centres (RCCs) in Nairobi. All equipment and stations to be refurbished under this project shall be prepared for normal day-to-day operation from these centres. The RCCs are subordinated to the National Control Centre (NCC). The station HV and LV switchgear shall be controlled from RCC. Indications shall be available both in NCC and RCC.
- Local Control from the local relay and protection panels and from the instrument sections on MV switchboards. If these contains full mimic and display functions the remote control can be omitted in MV panels.
- Direct Control/Emergency Control from the apparatus itself.

The stations shall function without interruptions even if connection to higher levels fails. A local/remote switch shall be accommodated on each control position blocking remote operation but not indication. **The position of this switch shall be indicated in the higher levels of operation.**

The control shall include operation of all circuit breakers and motorised disconnectors. Status indication shall be available in the supervisory system for all HV and MV breakers in the system as well as busbar voltages, line and transformer load in A (plus MW and MVar). For on-load tap changers position indication and raising/lowering of the tap changer position shall be possible supervisory and remotely. MV transformers may be equipped with automatic voltage control functions and manual override shall then only be possible if the automatic function is blocked locally. Relay trips and other relevant alarms shall also be transferred.

Direct control of all station switchgear at the respective switchyards/panels shall be possible.

Interlocking devices and automatic change-over systems shall be incorporated in the control circuits in the quantity needed to guarantee non-interruption and correct sequence of operation of the equipment. Protective devices shall be supplied in accordance with the Particular Technical Specifications, and the particular needs of such equipment furnished with the aim of ensuring a safe and reliable operation of the plants in the event of electrical and mechanical disturbances or in case of mal-operation by the plant personnel shall be taken into consideration.

The signals and command to be transmitted are given in Particular Technical Specifications

All equipment, instruments and devices in the substation necessary for supervisory, remote and local control as well as for protection, signalling and indication shall be included in the Bid and hence the Contract, it being understood so that the enumeration found in Scope of Works, in this respect is indicative but not limiting.

### **3.1.11 Interface between Contractors and towards Employer**

For substations to be extended, all connections shall be made and all equipment and drawings be provided by the Contractor to ensure proper operation of the complete plants, although this should not be specifically mentioned in the Scope of Works Section. The Employer will for such stations, supply to the Contractor within one month from the date of commencement all documentation available for adaptation to the existing plant.

All equipment specified under the various lots within a plant. specified in the Particular Technical Specifications and Scope of Works shall constitute a complete and functioning system together with equipments covered by any other lot even if this lot is contracted by separate contractor. The Contractor shall pay special attention to the Power Transformers. All necessary equipment and connections required to form a complete working plant and not mentioned under the Power transformer shall be included in the switchgear contract whether or not specifically mentioned in these Particular Technical Specifications.

The Contractor shall supply and execute all cable connections between the control room and the transformer marshalling boxes and cabinets as well as supply all AC power for motors and DC voltage for control, indication and alarm purpose. The Contractor shall also provide all necessary connections to the control system from other sources like voltage and current transformer terminals, etc.

The Contractor shall connect the transformer to the grid and supply clamps for the transformer bushing. He shall also design and construct the transformer foundations based on Transformer Contractor's specifications and drawings and supply and erect LV cables from auxiliary transformer terminals to the auxiliary voltage board.

For the substations to be refurbished or extended the Contractor shall provide and make drawings of the cable connections from actuators, sensors, transducers and relays to the Distributed Control Units as well as all materials required. He shall also document the adaptation to the existing plant with complete circuit diagrams, cable lists etc including proper cross references.

The Contractor shall connect the switchgear to the line landing span erected by the Line Contractor.

**SECTION VI**

**PARTICULAR TECHNICAL SPECIFICATIONS**



## TABLE OF CONTENTS

|   |    |
|---|----|
| 4.1.1 Particular technical specifications – SWITCHGEAR.....   | 1  |
| 4.1.1.1 General.....  | 1  |
| 4.1.1.2 Design Data.....                                      | 1  |
| 4.1.1.2.1 Breakers and Switches .....                         | 1  |
| 4.1.1.2.2 Circuit Breakers .....                              | 2  |
| 4.1.1.3 Measuring Transformers .....                          | 2  |
| 4.1.1.3.1 Current transformers .....                          | 2  |
| 4.1.1.3.2 Voltage Transformers.....                           | 3  |
| 4.1.1.4 SF <sub>6</sub> gas.....                              | 3  |
| 4.1.1.4.1 Low Density Warning.....                            | 3  |
| 4.1.1.4.2 Gas Refilling .....                                 | 3  |
| 4.1.1.5 High and Medium Voltage Outdoor Switchgear.....       | 3  |
| 4.1.1.5.1 General.....  | 3  |
| 4.1.1.5.2 Circuit Breakers .....                              | 4  |
| 4.1.1.5.3 Disconnectors/Isolators and Earthing Switches ..... | 4  |
| 4.1.1.5.4 Measuring Transformers .....                        | 5  |
| 4.1.1.5.5 Lightning Arresters .....                           | 5  |
| 4.1.1.5.6 Line Traps .....                                    | 5  |
| 4.1.1.5.7 Coupling Capacitors.....                            | 6  |
| 4.1.1.5.8 Line Matching Units .....                           | 6  |
| 4.1.1.6 Conductors, Insulators, Accessories.....              | 7  |
| 4.1.1.6.1 Conductors .....                                    | 7  |
| 4.1.1.6.2 Tubular Conductors.....                             | 7  |
| 4.1.1.6.3 Insulators.....                                     | 7  |
| 4.1.1.6.4 Accessories .....                                   | 8  |
| 4.1.1.6.5 Cable Ducts.....                                    | 8  |
| 4.1.1.6.6 Cable Marshalling Kiosks.....                       | 8  |
| 4.1.1.7 Tests.....  | 9  |
| 4.1.1.7.1 Conductors, Insulators, Accessories.....            | 9  |
| 4.1.1.7.2 Tests on the Switchyard on Site.....                | 9  |
| 4.1.1.8 Autoclosers .....                                     | 9  |
| 4.1.1.8.1 General.....  | 9  |
| 4.1.1.8.2 Modes of operation .....                            | 9  |
| 4.1.1.8.3 Operating Mechanism.....                            | 10 |
| 4.1.1.8.4 Power Supply .....                                  | 10 |
| 4.1.1.8.5 Control Cabinet .....                               | 10 |
| 4.1.1.8.6 Control Requirements .....                          | 10 |
| 4.1.1.8.7 Protection Requirements .....                       | 11 |
| 4.1.1.8.8 Insulating and Interrupting Medium.....             | 11 |
| 4.1.1.8.9 Ratings .....                                       | 12 |
| 4.1.1.8.10 Bushing Current Transformers.....                  | 12 |
| 4.1.1.9 Alternative Indoor 66 kV Switchgear .....             | 12 |
| 4.1.1.10 Medium Voltage Indoor Switchgear .....               | 12 |
| 4.1.1.10.1 General.....                                       | 12 |
| 4.1.1.10.2 Panels.....  | 12 |
| 4.1.1.10.3 Circuit Breakers and Disconnectors.....            | 13 |
| 4.1.1.10.4 Circuit Isolation and Interlocks.....              | 14 |
| 4.1.1.10.5 Switch-Disconnectors and Fuses.....                | 14 |
| 4.1.1.10.6 Shutter Mechanism .....                            | 14 |
| 4.1.1.10.7 Earthing .....                                     | 15 |
| 4.1.1.10.8 Cable Connection.....                              | 15 |
| 4.1.1.10.9 Measuring Transformers.....                        | 15 |
| 4.1.1.11 Protection and Control .....                         | 18 |
| 4.1.1.11.1 General.....                                       | 18 |
| 4.1.1.11.2 Arc Detection.....                                 | 18 |
| 4.1.1.11.3 Optional Equipment and Accessories .....           | 18 |
| 4.1.1.12 MV Cables and Accessories .....                      | 18 |
| 4.1.1.12.1 General.....                                       | 18 |
| 4.1.1.12.2 Conductors.....                                    | 19 |
| 4.1.1.12.3 Cable .....  | 19 |
| 4.1.1.12.4 Cable Laying and Routing .....                     | 19 |
| 4.1.1.12.5 Laying-up and Fillers of Three Phase Cables .....  | 20 |
| 4.1.1.12.6 Manufacturer's Identification .....                | 20 |
| 4.1.1.12.7 Armour.....  | 20 |

|                     |   |    |
|---------------------|---|----|
| 4.1.1.12.8          | Testing .....   | 20 |
| 4.1.1.12.9          | Sealing and drumming .....                            | 21 |
| 4.1.1.12.10         | Current carrying Capacity and Design Parameters ..... | 21 |
| 4.1.1.12.11         | Terminations .....                                    | 21 |
| 4.1.1.12.12         | Joint and termination material .....                  | 21 |
| 4.1.1.13            | Auxiliary Supply and Substation Lighting.....         | 22 |
| 4.1.1.13.1          | General.....  | 22 |
| 4.1.1.13.2          | Switchboards and Panels AC .....                      | 22 |
| 4.1.1.13.3          | Circuit Breakers ad Fuses .....                       | 23 |
| 4.1.1.13.4          | Current Transformers.....                             | 23 |
| 4.1.1.13.5          | Instruments and Relays .....                          | 24 |
| 4.1.1.13.6          | Tests.....  | 24 |
| 4.1.1.14            | 415/240V Auxiliary Supply .....                       | 24 |
| 4.1.1.14.1          | Auxiliary Transformers.....                           | 24 |
| 4.1.1.14.2          | Distribution Boards.....                              | 24 |
| 4.1.1.14.3          | Switchyard Lighting .....                             | 24 |
| 4.1.1.14.4          | DC Emergency Lighting .....                           | 25 |
| 4.1.1.14.5          | Hand Lamps and Portable Hand Sets.....                | 25 |
| 4.1.1.14.6          | Clock.....  | 25 |
| 4.1.1.15            | DC SUPPLY .....                                       | 25 |
| 4.1.1.15.1          | General.....  | 25 |
| 4.1.1.15.2          | Distribution Boards.....                              | 25 |
| 4.1.1.15.3          | Batteries .....                                       | 26 |
| 4.1.1.15.4          | Chargers.....   | 26 |
| 4.1.1.15.5          | Battery Conductors and Fuses.....                     | 27 |
| 48 VDC Charger      | .....   | 29 |
| Alarms and metering | .....   | 29 |

#### **4.1.1 Particular technical specifications – SWITCHGEAR**

##### **4.1.1.1 General**

These Particular Technical Specifications covers the particular technical requirements of the equipment to be procured under this contract.

In order to give the necessary background, equipment not needed in this specific tender may be included. The Scope of Work will in such cases give the limitations in the supply.

The Plant and Equipment is detailed in the section Scope of Works. Where a Turn Key Delivery is requested this shall cover engineering, design, manufacture, testing before shipment and packing sea worthy or otherwise as required, delivery CIP site, unloading, storage, civil works, erection and commissioning.

The Turn Key Stations shall furthermore cover a complete supply for substation including apparatus supports, cable racks and conduits with associated fixing material, insulators, conductors and clamps for busbars and apparatus connections, earthing systems, all cabling and connections, control and protection panels as well as any other equipment and materials not specifically mentioned or quantified, but which are required to make a complete and proper functioning substation.

##### **4.1.1.2 Design Data**

Provided no special data are given below, the equipment shall be designed in accordance with the requirements given in “Project Specific Data”

The tentative single-line diagrams, layout plans and sections for the various projects are shown on the drawings enclosed to the Tender Documents. The drawings will be submitted with the bidding documents.

The contractor is free to propose alternative solutions as options.

#### **General Clauses for HV and MV Switchgear**

##### **4.1.1.2.1 Breakers and Switches**

Breakers and switches equipped with motor drive shall be provided for electrical local and remote control. The control voltage for closing and opening commands and for the energy storage of circuit breakers is 110V DC from station battery. The motor drive for switches shall be DC.

The complete operating mechanism, including the controls, shall be built-in watertight and dust-proof cubicles fulfilling the requirements for outdoor enclosures as stated in the General Specifications. All parts shall be easily accessible without dismantling other parts. Direct, local push buttons for operating the breaker shall be located not more than 1.7 m above ground. All wiring shall lead to terminals. 10% of the terminals shall be spare.

A local/remote control selector switch shall be provided in the cubicle. With the selector switch set to local control, operation from any remote source apart from the protective relays shall be inhibited. The switch shall have contacts for remote indication.

A sufficient number of auxiliary contacts, with at least 5 NO and 5 NC contacts as spare, for 110 V DC shall be provided for control and interlock purposes.

Motors shall be designed in accordance with valid IEC publication and shall be effectively protected by miniature circuit breakers, with alarm contacts.

#### 4.1.1.2.2 Circuit Breakers

All circuit breakers shall be provided with means to prevent contact pumping while the closing circuit remains energised should the circuit breaker either fail to latch or be tripped during closing due to the operation of the protective relays.

The opening device of a circuit breaker shall be provided with two independent trip coils, connected to separate terminal blocks in the terminal cubicle, allowing for the connection of two independent opening command circuits.

A local position indicator, visible with the panel door closed, shall be mounted in the front panel of the operating mechanism cubicle.

A crank, lever or other similar suitable device shall be provided to permit charging the operation mechanism by hand in the event of a failure of the auxiliary supplies or in the event of a failure of the energy-storing device.

It shall be possible to determine the available operating energy stored by the mechanism prior to operating the circuit breaker. An alarm shall be given in the event of the stored energy falling below a minimum rated level.

If the stored operating energy is below a minimum rated level in one or more of the mechanisms, closing and auto- reclosing shall be blocked in all phases.

#### 4.1.1.3 Measuring Transformers

If output of measuring transformers are not given the Contractor shall calculate the necessary output based on the instruments and cable length he needs. The output of the measuring transformers for measuring and protection purposes shall be determined according to the technical requirements, but shall not be less than 125% of the overall computed (design) burden of the connected apparatus and conductors. However, the transformer shall not be loaded less than 60 % of rated burden.

- Power frequency test voltage on secondary windings, 1 min. 2,5 kV
- Overvoltage inter-turn test, 1 min. 3.5 kV

##### 4.1.1.3.1 Current transformers

The current transformers shall be designed to carry continuously a current of 120% of the primary rated current.

The rated current of the secondary windings shall be 1 A, unless otherwise specified in Scope of Works, the different cores shall have the following characteristics.

The core(s) for measuring:

- Accuracy (if not otherwise specified in scope of work) class 1
- Instrument security factor equal to or less than 5

The core(s) for energy metering:

- Accuracy (if not otherwise specified in scope of work) class 0.5s
- Instrument security factor equal to or less than 5

The core(s) for protection:

- Accuracy class 5 P
- Accuracy limit factor equal to or greater than 20

The core(s) for busbar protection:

- To be adapted to the protection scheme offered

The core characteristic shall be optimised to the selected scheme in sections where new busbar protection shall be installed.

The characteristics of the current transformers shall comply with the provisions stipulated in IEC 60044.

The Contractor shall demonstrate that the current transformers selected will ensure correct functioning of the associated protective equipment.

#### **4.1.1.3.2 Voltage Transformers**

The windings for measuring purposes shall be designed as follows:

The core(s) for measuring:

- Accuracy (if not otherwise specified in scope of work) class 1

The core(s) for energy metering:

- Accuracy (if not otherwise specified in scope of work) class 0.5s

The core(s) for protection:

- Accuracy class 3 P

The secondaries shall be provided with miniature circuit breakers with alarm contacts.

The characteristics of the voltage transformers shall comply with the provisions stipulated in IEC 60186 (and IEC 60358 for capacitive voltage transformers).

The Contractor shall demonstrate that the voltage transformers selected will ensure correct functioning of the associated protective equipment. The contractor shall also describe the actions taken to avoid ferro-resonance in the circuit.

#### **4.1.1.4 SF<sub>6</sub> gas**

##### **4.1.1.4.1 Low Density Warning**

For all components using SF<sub>6</sub> gas as isolation media a system for visual continuously monitoring of the gas density shall be provided. At a certain low density a signal shall be given to indicate that refilling should take place. At the extreme low density circuit breakers should be automatically blocked against operation.

##### **4.1.1.4.2 Gas Refilling**

SF<sub>6</sub> gas refilling equipment mounted on a trolley shall be provided for each substation. The gas handling apparatus to be supplied couplings for all apparatus in the station and shall have sufficient storage facilities for the maximum quantity of gas that could be removed when carrying out maintenance or repair work on the largest section of the switchgear.

#### **4.1.1.5 High and Medium Voltage Outdoor Switchgear**

##### **4.1.1.5.1 General**

The substation design should be such as to minimise the number of levels of conductors and to ensure that the consequences of a failure of one set of high-level conductors are limited to the loss of that circuit and a single bus bar section. This principle shall also be applied with regard to earth wire conductors.

All apparatus shall be erected on galvanised steel supports dimensioned for the weight of the apparatus as well as short-circuit forces, the climatic forces and the forces arising under operation. Steel lattice landing gantries shall be arranged for incoming lines design for the last slack span.

Vehicle access to permit the transport of major switchgear equipment shall be provided. This shall be achieved without the need to de-energise circuits.

All breakers and switches shall come ready for distribution automation.

This Section covers the technical requirements of the high voltage equipment to be installed at the outdoor switchyards.

#### **4.1.1.5.2 Circuit Breakers**

The three-phase circuit breakers shall be of the outdoor, single pressure SF<sub>6</sub> (vacuum type can be used below 66 kV). The breakers shall be mounted on steel structures.

For 132 kV and lower voltage three-phase rapid auto-reclosing only is required and the mechanism can be common for all poles.

A spring-operated mechanism is preferred. Hydraulic mechanism can be used. Pneumatic operating mechanism is not accepted.

The breakers shall be capable of handling the following operation cycle, according to the IEC recommendations:

0-t-CO-t'-CO      t = 0.3 sec      t' = 3 min and      CO-t2-CO      t2=15 sec

The total breaking time (opening time plus duration of the arc) of the breakers shall be as short as possible, but in no case is it to be longer than 50 msec.

The stored energy shall for all types of operating mechanisms be sufficient to allow a complete O-C-O cycle.

#### **4.1.1.5.3 Disconnectors/Isolators and Earthing Switches**

Disconnectors and earthing switches shall be manufactured in accordance with IEC 60129. All shall be mounted on steel structures.

The contact surfaces shall be heavily silver-plated. The contact pressure shall be ensured by means of springs.

Each three-phase isolating switch and each three-phase earthing switch shall be equipped with its own independent operating mechanism.

In the case of a complete failure of the operating mechanism all switches shall be operable manually by means of a lever or crank or another feature. The manual mechanism shall allow safe switching under energised but no load conditions and shall be operated from a standing position.

Disconnectors shall have mechanical interlocking to attached earth switches. The interlocking shall prevent closing of earth switch when the disconnector is in closed

position, and disconnect the motor and prevent closing of the disconnector when the earth switch is closed.

#### 4.1.1.5.4 Measuring Transformers

The measuring transformers shall be single-phase, oil-immersed, mounted in one insulator. They shall be mounted on steel structures. Each transformer shall be equipped with an oil level gauge to be easily visible from the ground. The transformers shall be supplied including oil filling. The oil of the measuring transformer shall be hermetically sealed against the ambient air. The sealing method shall be described in the Tender, as well as the method of compensation for changes in the oil volume due to temperature changes. Gas cushion shall not be used. The Bidder shall indicate the measures provided for relieving dangerous pressure rises that may develop due to an internal electrical fault.

The primary connections of all measuring transformers shall be silver-plated. All secondary connections shall be connected to a terminal block, which shall be located in a dust-proof and watertight terminal box and shall be clearly labelled. An earth connection to the housing shall be provided for sensitive earth fault protection, torroidal CT shall be installed in all feeders.

#### 4.1.1.5.5 Lightning Arresters

The lightning arresters shall be of the metal oxide gapless type, complying with IEC 60099-1

For tendering purposes the lightning arresters shall have the following characteristics (the Contractor shall check the values by calculations to be approved by the Project Manager):

|  |        |      |      |      |
|--|--------|------|------|------|
|  | 132kV  | 66kV | 33kV | 11kV |
| (1) Continuous operating voltage (r.m.s.) (kV) | 84     | 42   | 22   | 7    |
| (2) Rated discharge current (8/20 ms)(kA)      | 10     | 20   | 10   | 10   |
| (3) Rated Voltage (kV)                         | 108    | 54   | 27   | 9    |
| (4) Creepage distance                          | 4092mm |      |      |      |

As all other main parts of the switchyard they shall be mounted on steel structures.

The lightning arresters shall be fitted with a pressure relief device.

Surge counters shall be supplied for each single-phase arrester for voltages above 33 kV.

The earth conductor from the arrester to the counter as well as the in-terminal of the counter shall be suitably insulated or screen protected against accidental touching.

#### 4.1.1.5.6 Line Traps

The line traps shall comply with IEC 60353. They shall be suitable for mounting directly on the associated coupling capacitors, or separately on post insulators.

The traps shall be secured against birds nesting. The line traps shall have the following characteristics:

- |                             |         |
|-----------------------------|---------|
| 1) Minimum Inductance       | 0.2 mH  |
| 2) Min. resistive impedance | >570Ohm |

- |                          |        |
|--------------------------|--------|
| 3) Minimum rated current | 1250 A |
| 4) Short time current    | 31.5kA |

The main coil with its spark gap shall have a self-resonant frequency higher than 500 kHz.

The Bidder shall furnish with the Bid a diagram showing the resistive impedance of the traps as a function of the frequency.

The line traps shall be of the band tuned type. Tuning device and surge arrester according to IEC 60353 shall be installed. The tuning device shall be adjustable in the range 260 – 502kHz. Each line trap shall be enclosed by bird barriers

Every line trap shall be supplied with a line matching unit as per specifications in paragraph 4.1.1.5.8 below.

#### 4.1.1.5.7 Coupling Capacitors

The capacitor shall have a rated capacitance of not less than 2000pF and shall meet the insulation level and test voltage equivalents of IEC recommendation for each device (IEC 60358 Coupling capacitors and capacitor dividers)

#### 4.1.1.5.8 Line Matching Units

Phase to phase coupling units complete with coupling filters and protection circuit, including hybrid transformer.

The high frequency coupling units shall be assembled in a sheet steel box or similar and be suitable for mounting on the pedestal support for the coupling capacitor. The filters are to be suitable for outdoor use in a hot dusty/humid climate and are to have weather proof door seals together with breather holes to avoid condensation. The units are to have an earthing switch which should preferably be interlocked with the box door/lid such that the latter cannot be opened unless the earth switch is closed to earth the device, and clear ON/OFF position of this switch should be indicated. The terminal of the filter, which shall be connected directly to the substation earth, shall be clearly designated. The device shall meet requirements of IEC 60481.

The device shall be fitted with a rating plate clearly defining but not limited to the following data:

- Manufacturer's Name
- Type
- Serial number
- Peak envelope power
- Available bandwidth or working range

Technical requirements:

Bypass filter:

- |                                     |             |
|-------------------------------------|-------------|
| • Impedance, equip. side unbalanced | 75/125 Ohm  |
| • Impedance, line side              | 240/320 Ohm |
| • Nominal PEP at < 50kHz            | < 400 W     |
| • Nominal PEP at > 100kHz           | < 1000 W    |
| • Coupling capacitance              | 1.5 to 20nF |

Drain Coil:



- Inductance, adjustable 0.2 – 0.7 mH
- Impedance at power frequency < 1.5 Ohm

Earthing Switch:

- Rated current 300 A rms
- Lightning Arrester:
- Rated voltage 660 V
- Max. 100% impulse spark over voltage 3 300 V
- Rated discharge current 5 kA

#### 4.1.1.6 **Conductors, Insulators, Accessories**

##### 4.1.1.6.1 **Conductors**

Unless otherwise stated in Scope of Works, the conductors shall be concentrically laid, stranded, flexible conductors made of round aluminium, aluminium alloy or copper wires. The alloy shall be aluminium alloy 6201-T81 in accordance with ASTM Standard B 398-67 (equivalent IEC standard) or aluminium alloys of similar approved composition, as known under the trade name "ALDREY".

The same type of conductor may be used for the overhead earth wires, the cross-sections being at least the equivalent of 95 mm<sup>2</sup> copper. Other earth wires shall always be of copper.

The cross-sectional area of the conductors shall be chosen according to the electrical and mechanical requirements, and shall be proposed in the Tender. Rated currents are given in Scope of Works, for each substation. The minimum factor of safety for busbars or other connections based on elastic limit shall be 2.5.

The number of different cross-sectional areas to be used for the current carrying conductors shall be strictly limited. For overhead earth wires the same cross-sectional area shall be used for all substations.

All wires making up the conductor shall be free from dirt, splints, scratches and all imperfections not consistent with the best commercial practice.

The conductor shall be tightly and uniformly stranded with no loose strands and when subjected to 50% of ultimate strength, it shall show no high wires but shall maintain a true cylindrical form. Any Cu-Al connections shall be made with special junction pieces, outdoor as well as indoor.

Supply and erection of conductors and earth wires from dead end towers to gantries will be provided for under other contracts. It is however, the Contractor's responsibility to supply and erect the clamps and connections to the intake.

##### 4.1.1.6.2 **Tubular Conductors**

If tubular bus bars are used they shall be made of aluminium-magnesium-silicon tubes in accordance with IEC 60114. They shall be designed to withstand thermal and dynamic stresses under normal duty and maximal short-circuit current without damage. Fastening shall be so that thermal expansion is accommodated without any undue stresses.

##### 4.1.1.6.3 **Insulators**

The post and string insulators shall be of the silicon rubber type. The post insulators shall be dimensioned in accordance with IEC 60273. They shall comprise fully interchangeable units of either the pedestal or solid core cylindrical type and shall be designed so that they can be used either upright or inverted.

The string insulator units shall comply with the provisions of IEC 60120, IEC 60305 and IEC 60372. The type of insulator and the characteristics of the discs and the number of discs per string shall be chosen according to the electrical and mechanical requirements, and shall be proposed in the Tender.

Minimum factors of safety shall be:

- For complete insulators based on electro-mechanical failing load test (IEC 60383) 2.5
- For insulator metal fittings based on elastic limit 2.5

Each insulator shall be marked with the initials or trademark of the manufacturer and with the guaranteed electromechanical strength. All markings shall be plainly legible and durable.

#### **4.1.1.6.4 Accessories**

For all accessories as clamps, connections, etc., care shall be taken to fulfil all conditions required concerning current carrying capacity, mechanical strength, glow discharge characteristics, corrosion resistivity and easy mounting, etc.

All accessories shall comply with VDE Standard 0210 and 0212 and with the corresponding DIN specifications or with other similar and approved specifications and shall be tested according to the same specifications.

#### **4.1.1.6.5 Cable Ducts**

All necessary cable ducts from the switchyard to the control building to be included in the tender. The cable ducts are specified in Section - Civil Works.

#### **4.1.1.6.6 Cable Marshalling Kiosks**

For each switch bay a separate dust and waterproof, cable marshalling kiosk shall be provided, minimum IP 54. It shall be possible to securely fix the hinged front door in open position.

All secondary cables coming from the circuit breakers, disconnecting switches, instrument transformers, etc., shall be collected in this cable marshalling kiosk. From here, a minimum amount of multicore or fibre optic cables shall lead to the control room.

The cable marshalling kiosks shall be equipped with rows of terminals for all potential and current circuits, including the necessary test terminals with bushings and lashes.

At least 10% of the terminals shall be spare. For the switch bays, which are not entirely equipped with switchgear, the kiosks shall have all necessary terminals plus 10% spare as if the switch bays were complete.

The kiosks shall be ventilated by means of suitable openings, covered with dust filters and have drainage plugs at its lowest location.

Each kiosk shall be equipped with a thermostat controlled heater in order to avoid any moisture. The heaters shall be so located that it does not damage any equipment or cables when let on.

An internal AC, single-phase socket outlet for hand lamps and small tools, and an AC three phase socket outlet for heavy tools shall be provided in each and every cable marshalling kiosk. All these outlets to be according to the same standards as for the control building.

Miniature circuit breakers, with alarm contact, shall be provided for the voltage transformer secondaries.

All terminals, socket outlets and other parts of the kiosks shall be easily accessible without dismantling any part.

#### 4.1.1.7 Tests

Tests shall be made in accordance with the applicable standards. Type test shall be carried out on one sample of the equipment or as requested by the employer.

##### 4.1.1.7.1 Conductors, Insulators, Accessories

Tests for physical and electrical properties on conductors shall be made in accordance with ASTM Standard B 398 and 399 (IEC Equivalent) or other equivalent and approved standard. These tests on wires shall be made on wires removed from the complete conductor. All wires making up the conductor sample shall be tested.

Sampling, inspection, tests and acceptance of the insulators shall be in accordance with ASA Standards C 29.1 (IEC Equivalent), Test Methods of Electrical Power Insulators and C 29.2, Wet Process Porcelain Insulators (Suspension Type).

##### 4.1.1.7.2 Tests on the Switchyard on Site

All electrical equipment and installations shall be tested for correct connections of the high-voltage circuits as well as of the control and measuring circuits, installation, insulation, and earthing.

All electrical equipment and installations shall be subjected to a complete operational test to check the correct operation thereof in terms of the operational requirements specified in these Specifications.

#### 4.1.1.8 Autoclosers

##### 4.1.1.8.1 General

Auto-reclosers are used on less important 33/11 kV substations instead of circuit breakers and control systems. The autocloser shall be designed for pole mounting with the following features:

- (I) Ability to distinguish between permanent and transient/temporary faults
- (ii) Ability to interrupt fault currents and thereafter restore every supply.
- (iii) Ability to switch normal load currents.
- (iv) Ability to coordinate with other protective devices such as drop out fuses, Sectionalizer and circuit breakers controlled by normal IDMT protection curves.

##### 4.1.1.8.2 Modes of operation

Autoreclosers shall be equipped to provide three phase tripping and reclosures, then lockout after a pre-selected sequence of three phase unsuccessful reclosures.

If a reclosure is successful the operating mechanism shall re-set to make available the full sequence of operations.

A minimum availability of four opening operations shall be provided with an autoreclose facility on the first three, the fourth opening shall cause lockout. Once the recloser is locked out manual resetting is required in order to restore service.

It shall be possible by a programmable setting device to select the number of operations which the recloser will perform automatically and also the time delay which may be applied to each individual operation independent of the other operations. (this also means to block the recloser function when used as transformer breaker)

#### **4.1.1.8.3 Operating Mechanism**

The closing mechanism shall charge a spring during closing which drives the tripping mechanism. Solenoid mechanism shall not be used.

The tripping shall be coil initiated via commands from the control/protection system.

#### **4.1.1.8.4 Power Supply**

The recloser shall be completely self contained deriving all its energy from the feeding side of the HV network. High voltage operated solenoids are preferred. The control and protection facilities may be operated by means of current transformers on the feeding side bushings. If batteries are provided for control, protection and tripping batteries are provided for control, protection and tripping functions detailed capacity calculations are to be provided showing the number of in/out operation the battery can handle in addition to the normal control/protection requirements of the stated ambient temperatures. A minimum of 2000 in/out operations are required with a minimum battery life span of 5 years. A low battery voltage signal shall be provided.

#### **4.1.1.8.5 Control Cabinet**

A separate control cabinet shall be provided connected to the recloser by means of a multicore cable. The cabinet shall have a heater for connection to external power supply. The cabinet shall be dust and vermin proof and protected against direct sunshine by means of a shade. Ingress of water shall not be possible.

#### **4.1.1.8.6 Control Requirements**

A microprocessor based control unit for the recloser is required which also integrates the protection relays. The control unit shall have a socket for serial communication and downloading of information to a hand-held external unit from the memory.

The autorecloser shall have facilities for manual tripping and locking out by means of an external handle or similar.

The following control functions shall be provided on the front panel:

- local/remote control selection
- closing/tripping

- autoreclose in/out (one trip to lockout)
- protection engaged/disengaged
- earth fault in/out
- sensitive earth fault in/out
- relay status.
- Energy profiles;
- Demand registers

Local status indications shall be included in addition to the above control functions.

The control unit shall also have facilities for remote control/indication.

#### **4.1.1.8.7 Protection Requirements**

Relay characteristics settings shall preferably be performed on the front panel as well as selection of the operating sequence.

Dead times and reclaim time shall be selectable in steps.

The protection system shall have facilities for:

- phase faults
- earth faults
- sensitive earth fault.

The phase and earth fault protection shall have standard inverse IDMT characteristics and definite time. The trip setting range for phase faults shall minimum cover 20 to 800 A while for earth faults 10 to 400 A.

The sensitive earth fault relay shall be of the definite time type with instantaneous element, adjustable between 2 and 10A in steps. Time delay should be settable between 0 and 20 secs. in steps.

The relays shall be equipped with in rush restraint facilities. A counter is to be provided to keep record of the number of in/out operations.

#### **4.1.1.8.8 Insulating and Interrupting Medium**

The interrupting medium shall be vacuum. The insulating medium shall be SF<sub>6</sub> or solid insulation. The SF<sub>6</sub> gas used shall comply with IEC publication 60376.

Unless otherwise stated, the insulating oil used with autoreclosers shall be of the standard mineral uninhibited type and shall comply with the requirements of IEC 60269. In addition to the quantity of gas required to fill the supplied equipment, 20% shall be supplied as spare.

Where SF<sub>6</sub> gas filled autoreclosers are offered, the supplier shall provide the user with necessary instructions for refilling the gas and maintaining its required quantity and quality. The autorecloser shall have facilities for lockout in case of low pressure with an associated indicator flag easily seen from the ground. A pressure gauge easily read from the ground shall also be provided.

Reclosers using oil as interrupting medium are not acceptable and will be rejected. Where gas filled reclosers are offered the supplier shall include in the quotation the cost of one set of gas filling equipment. One set of gas filling equipment shall be supplied with the reclosers.

#### **4.1.1.8.9 Ratings**

a) The reclosers will be used on networks with nominal operating voltages of 33 kV. The maximum system voltage will be 36 kV. The rated one minute power frequency withstand voltage shall be at least 95 kV when contacts are opened with Basic Insulation Level at least 170 kV.

b) The continuous current rating shall be at least 400 A. The short time 3 seconds current rating shall be at least 12 kA. The interrupting current shall be at least 12 kA. The closing and latching capability shall be at least 20 kA.

#### **4.1.1.8.10 Bushing Current Transformers**

The bushing current transformers for protection shall be single core and provided on all phases. They shall be rated as per design requirements if not specified.

If current transformers are used to provide power supply to control, protection and tripping these are to be dimensioned with 30% spare capacity. The cores for this supply shall be separate from the protection core.

#### **4.1.1.9 Alternative Indoor 66 kV Switchgear**

For very confined substations in the Nairobi an alternative with indoor 66kV switchgear is to be included in the Bid. The 66 kV breaker shall be mounted on a trolley behind a steel wall together with earthing switches and measuring transformers. In principle the arrangement shall be as for enclosed switchgear below with the exception of the enclosure. The steel wall shall protect operators from any danger followed from live part and possible arcing. The motor operated trolley shall act as a disconnecter and be retractable from front of steel wall. The earth switch shall also be operated from here.

#### **4.1.1.10 Medium Voltage Indoor Switchgear**

##### **4.1.1.10.1 General**

This section covers the manufacture and supply of indoor metal enclosed, metal clad type 33 kV and 11 kV switchboards constructed and tested in accordance with IEC60298 as well as circuit breakers, associated equipment and spares.

All bays shall be clearly labelled in English language with feeder or transformer name.

Tests shall be made in accordance with IEC 60298. Arc tests, as specified in IEC 60298 Annex AA are required. The arch type test shall be performed by an internationally recognised test institution for the full short circuit current in at least 1 sec.

##### **4.1.1.10.2 Panels**

The boards shall be complete with busbars, withdrawable circuit breakers, cable connection points, earthing switches, measuring transformers, cable relays, instruments and other

ancillary equipment, fully wired, but dismantled to individual panels/sections for delivery purposes.

The boards shall be suitable for indoor use and shall be of single busbar three-phase configuration at a rated frequency of 50 Hz. If so indicated in Scope of Work, the busbar shall be split by a withdrawable sectionalising circuit breaker. In any case shall it be possible to add new boards including such bus coupler at a later stage.

The cubicles shall be short circuit and arch type tested. The switchgear shall consist of cubicles of tropical design. The cubicles shall be metal-enclosed with separate compartments for busbars, circuit breakers, cable termination and instruments, and shall be so designed that future extension can easily be made.

The cubicles shall be designed with protection class IP3X for external surfaces and IP2X for internal compartmentalisation.

The instrumentation compartment shall house all secondary equipment. The compartment shall be accessible from outside without opening any of the doors to the H.V. equipment. In cubicles housing voltage transformers, circuit breakers and switch disconnectors, the instrument compartment shall in addition, contain fuses for secondary circuits and direct-on-line starters for the operating devices.

Internal H.V. connection shall be made of copper or aluminium alloy. The cubicles shall be painted in a colour that will be stated at a later date. Each cubicle shall be labelled and the equipment marked.

The Supplier shall state necessary free spaces behind and above the switchgear for pressure relief purposes. The service side of the switchgear shall be completely screened from shock waves and fume gases.

#### **4.1.1.10.3 Circuit Breakers and Disconnectors**

The three phase circuit breakers shall be of the SF<sub>6</sub> or vacuum type for 33 kV and vacuum type for 11 kV.

The breakers shall be capable of handling the following operation cycle, according to the IEC recommendations:

$$0-t-CO-t1-CO \quad t = 0.3 \text{ sec} \quad t1 = 15 \text{ sec}$$

The total breaking time (opening time plus duration of the arc) of the breakers shall be as short as possible, but in no case is it to be longer than 60 msec.

The circuit breakers shall be designed for switching of capacitor banks and shall be such that restriking during breaking operation cannot occur.

A spring-operated mechanism shall be provided and the mechanism shall be equipped for electrical local (from switchgear) and remote control (from control centre). If not otherwise stated in Scope of Works, the control voltage for closing and opening commands and for the operating mechanism motor(s) shall be:

110 VDC + 10% - 20%, unearthed, from battery

A local position indicator shall be mounted in the front panel of the operating mechanism cubicle.

The circuit breakers shall be mounted on manual operated trucks so that they can be moved into counter contacts of the switchgear (draw-out/jack up down type). All breakers of same rating shall be fully interchangeable.

Each cubicle shall be provided with facilities for local control and position indications. All trucks for circuit breakers and disconnectors shall be incorporated in the interlocking system.

For SF6 circuit breakers, a system for continuously monitoring the gas density shall be provided. At a certain low density signal shall be given to indicate that refilling should take place. At the extreme low density the circuit breaker should automatically trip and be blocked against operation. SF6 gas refilling equipment mounted on a trolley shall be provided.

The stored energy shall for all types of operating mechanisms be sufficient to allow a complete O-C-O cycle.

A sufficient number of auxiliary contacts for 110 V DC shall be provided for control and interlock purposes.

Motors shall be designed in accordance with valid IEC publication and shall be effectively protected by miniature circuit breakers, with alarm contacts.

All wiring shall lead to terminals. 10% of the terminals shall be spare.

#### **4.1.1.10.4 Circuit Isolation and Interlocks**

The arrangement of the secondary isolating contacts, must be such that when the breaker is in the test position, the secondary isolating contacts are still made so that the secondary circuit may be tested without the need for jumper connections. It must be possible to leave the breaker trolley in disconnector open position with closed cabinet door.

Clearly labelled mechanical interlocks shall be provided to prevent:

- (a) a closed breaker from being withdrawn from or inserted into the isolating contacts.
- (b) the breaker from being withdrawn or replaced except when its mechanism is in the "off" position.
- (c) the breaker being closed in the "service" position when the secondary circuits are not properly connected.

#### **4.1.1.10.5 Switch-Disconnectors and Fuses**

Cabinets for station transformers for local LV supply to be equipped with switch-disconnectors, fuse holders and earthing switches. Such breakers do not need to be erected on trolley but the arch test requirements prevail and the cubicle must be extensible with standard cubicles on both sides. The disconnector must be so arranged that it is possible to insert an isolating plate between the live and dead contacts when working in the cubicle. Such plate should be part of the supply.

Transformer Cubicles shall be provided with fuse tripping devices via striker pin. The HRC fuses must conform to DIN (IEC equivalent) regulation for 12 kV or 36 kV.

#### **4.1.1.10.6 Shutter Mechanism**

Substantial safety shutters are to be provided to cover the breaker isolating sockets, on both the busbars and circuit connections. These shutters are to be automatically actuated by the breaker.



Each shutter shall be capable of being separately operated and padlocked in the closed position.

#### **4.1.1.10.7 Earthing**

All cubicles shall be connected to earth via conductors with min. 70 mm<sup>2</sup> cross section.

Neutral terminals of voltage transformers shall be connected via separate, insulated conductors to the main earth conductor.

Cubicle doors shall be separately earthed if live equipment is fixed to the doors.

Permanent earthing facilities shall be installed on all incoming and outgoing feeders and on the busbar in one point (or if split busbars in each section.). It shall be possible to connect the earthing devices from outside with closed doors. Earthing devices shall have reliable position indicators and sufficient making capacity shall be proved.

Capacitive voltage indicators shall be arranged to avoid closing of earthing switches against energised components.

#### **4.1.1.10.8 Cable Connection**

The cable termination compartment for feeders shall have adequate space for housing of cable terminals up to, 2x3x1 core 300 mm<sup>2</sup> Al XLPE (two single core set) and shall be complete with cable terminations, bolts, nuts and cable glands (the cable terminals shall be for 1x3x150 mm<sup>2</sup> Cu cable) The cable termination compartment for the connections to the 66/11kV transformers must allow for cables dimensioned for 24 MVA.

For cable test purposes, it must be possible to loosen the connection between cables and the measurement transformers from the front of the switchboard, with energised busbars without removing any apparatus. The Bidder shall demonstrate this in his Bid.

#### **4.1.1.10.9 Measuring Transformers**

##### *4.1.1.10.9.1 Current Transformers*

All current transformers shall have bar primaries and shall be resin encapsulated and generally comply with IEC 60044. All current transformers shall have a maximum short-time current rating for one second.

Feeder circuits shall be equipped with a current transformer on three phases with four cores:

For measuring and instruments, not less than 15 VA, Class 0.5

132kV: Ratio 600/400/200/1 amp

66 kV: Ratio 200-400-600/1 amp

33kV: Ratio 200-400/1 amp

11 kV: Ratio 200-400/1 amp or

11 kV: Ratio 400-600/1 amp

For overcurrent and earth fault protection, not less than 15 VA, Class 5P20.

132kV: Ratio 600/400/200/1 amp

66kV: Ratio 200-400-600/1amp

33kV: Ratio200-400/1amp

11 kV: Ratio200-400/1 amp Or

11 kV: Ratio 400-600/1 amp

For overcurrent and earth fault protection, not less than 15 VA, Class 5P20.

132kV: Ratio 600/400/200/1 amp

66kV: Ratio 200-400-600/1amp

33kV: Ratio 200-400/1amp

11 kV: Ratio 200-400/1 amp Or

11 kV: Ratio 400-600/1 amp

For Busbar protection core as per the design

Transformer bushings shall be equipped with a current transformer on each phase with four separate cores:

For differential protection, not less than 15VA, Class X

132kV: Ratio adopted to Transformer rating.

66kV : Ratio adapted to transformer rating

33kV : Ratio adapted to transformer rating

11 kV: Ratio adapted to transformer rating

For restricted earth fault, not less than 15VA, Class X

132kV: Ratio adopted to Transformer rating.

66kV : Ratio adapted to transformer rating

33kV : Ratio adapted to transformer rating

11 kV: Ratio adapted to transformer rating

For over current and earth fault protection, not less than 15VA, Class 5P20

132kV: Ratio adopted to Transformer rating.

66kV : Ratio adapted to transformer rating

33kV : Ratio adapted to transformer rating

11 kV: Ratio adapted to transformer rating

For instruments, not less than 15 VA, Class 0.5:

132kV: Ratio adopted to Transformer rating.

66kV : Ratio adapted to transformer rating

33kV : Ratio adapted to transformer rating

11 kV: Ratio adapted to transformer rating

Loose Transformers for Transformer Neutral

- (a) Loose single phase current transformers with two separate secondary cores for connection of Restricted Earth fault Protection and Neutral Overcurrent Protection  
Ratio as per design

*4.1.1.10.9.2 Voltage Transformers*

Three phase voltage transformers shall have the following characteristics

|       |  |                           |
|-------|--|---------------------------|
| Ratio | $\frac{132000}{\sqrt{3}}$ / $\frac{110}{\sqrt{3}}$ | for 132kV switchgears     |
| ratio | $\frac{66000}{\sqrt{3}}$ / $\frac{110}{\sqrt{3}}$  | for 66 kV switchgears and |
| ratio | $\frac{33000}{\sqrt{3}}$ / $\frac{110}{\sqrt{3}}$  | for 33 kV switchgears and |
| ratio | $\frac{11000}{\sqrt{3}}$ / $\frac{110}{3}$ / 110   | for 11 kV switchgears     |

with accuracy class 0.5 for the measuring winding and class 3 P of capacity between 100 to 200 VA for the protection winding in accordance with IEC 60186.

Each busbar section and each 33kV and 11 kV outgoing feeder shall be equipped with a three-phase voltage transformer.

The voltage transformers shall be equipped with both primary H.V. and secondary L.V. fuses, and shall be so arranged that the H.V. fuses are not accessible unless the voltage transformer is withdrawn.

The transformer shall be resin encapsulated of the electromagnetic type.

#### 4.1.1.11 **Protection and Control**

##### 4.1.1.11.1 **General**

Each MV panel shall be supplied complete with numeric protection relay and control units. Maximum of two protection functions can be combined in one unit. It shall be possible to block remote control (but not indication) locally. Such blocking shall be indicated remotely. All requirements and facilities described in the Section Control and Protection below shall be incorporated as appropriate.

##### 4.1.1.11.2 **Arc Detection**

The complete 11KV board shall be fitted with arc detection devices in the cubicles with a scheme that will instantaneously trip the necessary circuit breakers to effectively isolate the faulty part of the switchgear board.. The arc detection devices shall be placed to cover all the HV compartments of each Switchgear panel i.e Busbar compartment, CB compartment and Cable compartment: and shall instantaneously trip the appropriate circuit breakers. The arc detection shall be insensitive to sunlight and flashlight. Rapid tripping scheme shall not influence the test requirements given above. The arc detection trip indications shall be available on the SCADA. The scheme is to be approved by the Project Manager.

##### 4.1.1.11.3 **Optional Equipment and Accessories**

Bidders shall advise and quote, in detail for accessories and maintenance tools and equipment that they would recommend is provided with such a switchboard installation.

It is emphasised that full information must be provided as to the costs of replacement materials, such as gaskets, seals, 'O' rings, spare contacts and mechanisms, etc.

Bidders shall also specify all equipment, and costs, which will be required to maintain the switchgear in a fully operative condition throughout its service life of at least twenty-five years. This should include gas leakage detection equipment, pressure testing equipment, gas cleaning equipment? and gas recharging equipment.

#### 4.1.1.12 **MV Cables and Accessories**

##### 4.1.1.12.1 **General**

All cables accessories and materials shall be in accordance with the latest editions (including all amendments) of IEC and ISO recommendations.

All cables shall be suitable for operation:

- on a system with direct earthing of the transformer neutral
- under maximum load (ONAF conditions) plus 10 % specified for respective transformers
- in the climatic conditions prevailing at site

No joints shall be allowed. Only dry vulcanising processes shall be used. Special precautions shall be taken to avoid ingress and spreading of moisture and development of water-treeing. The Tenderers shall document the construction measures used to achieve these requirements.

#### **4.1.1.12.2 Conductors**

All conductors shall be stranded copper or aluminium. The conductor shall be clean, uniform in size, shape and quality, smooth and free from scale, splits, sharp edges and other harmful defects. The conductor shall be in accordance with IEC 60228. The conductor shall be filled with swelling powder to stop axial ingress of moisture.

#### **4.1.1.12.3 Cable**

The conductor shall be covered with:

- An extruded semi-conducting layer
- A layer of dry vulcanised cross-linked polyethylene (XLPE) insulation
- An extruded strippable semi-conducting layer
- A water tight copper or aluminium seal
- A layer of swelling tape to prevent axial ingress of water along the screen
- A layer of earthing screen of stranded aluminium or copper
- An outer LDPE (low density polyethylene) sheath for water tightness and mechanical protection.

#### **4.1.1.12.4 Cable Laying and Routing**

The final routing of HV and LV cables in indoor and outdoor installations shall be determined by the Contractor from the directives given in Particular Specifications, and the principles shown in the layouts on the drawings. All cable routing and arrangement shall be subject to the Project Manager's approval and must adapt to obstacles as tubes and ventilation channels. All penetrations of fire zone separations shall have the same fire classification as the separation itself.

Cables shall be laid on corrosion resistant (aluminium or hot dipped galvanised) cable trays and racks and by raising cables fixed to cable ladders. The trays shall be dimensioned and fixed so that it allows one man to climb on it in addition to the cable load. Each tray shall have at least 15 % spare capacity. The distance between each tray shall at least be 300 mm. For exposed outdoor installations cables shall be laid in covered cable trenches, plastic or steel ducts, depending on the available space.

Branch offs to individual equipment shall be fixed and supported all the way to the connection box. Cables and cable supports shall be properly fixed and secured against movement under short-circuit and strain caused by erection work. Particular attention shall be given to termination in confined areas where personnel may climb under erection and maintenance. Flexible tubes of "spiral type" shall not be used whereas tubes of "plica" type can.

Low power cables, i.e. cables for control, metering, etc. shall not be run in close parallel to high power cables or earth wires, but shall be run at the greatest possible separating distance. The minimum distances are:

- High and medium voltage versus control and measuring cables 800 mm

- Low voltage power cables versus control and measuring cables 400 mm

Necessary EMC consideration shall be taken in accordance with EMC standards.

Additionally, cables for extra low power, i.e. mA and mV circuits and cables connected to low power solid state electronic circuits, shall be laid in separate sheet steel trays with covers. The DC trip and AC voltage supplies and wiring to main protective gear shall be segregated from those for back-up protection to the greatest extent possible.

Single-phase power cables shall be run in trefoil configuration, single-phase DC power cables shall be run in parallel. Special care shall be taken so that closed magnetic circuits do not form around single phase cables.

Cables below 25 mm<sup>2</sup> cross section shall be copper. Larger cross sections may be aluminium. Minimum cross sections shall be as follows:

- Measuring cables for current 2.5 mm<sup>2</sup>
- Control and other measuring cables 1.5 mm<sup>2</sup>
- Power cables according 120 % max load current

All cross section must be checked against max load current, allowable burden on measuring transformers, short circuit values, voltage drop, protection requirements and selectivity.

The cables shall be marked with item designation in both ends as well as by entrances in enclosures. The cable marking shall be fire proof.

Cables shall be laid in full runs and not spliced unless approved by Project Manager. Termination of multi-stranded conductor ends shall be with a suitable crimped thimble as specified above. All other cable lugs or similar shall be of crimped type adapted to the cable type and cross-section used. The tools used should be special approved for the lugs and cable type used.

The cable supplier's instructions regarding handling and bending radius shall be followed.

#### **4.1.1.12.5 Laying-up and Fillers of Three Phase Cables**

The cores of three-phase cable shall be laid-up together with suitable fillers, wormed circular and binding tapes applied overall.

#### **4.1.1.12.6 Manufacturer's Identification**

The manufacturer's identification shall be provided throughout the length of the cables by means of a tape under the sheath printed with the manufacturer's name. Alternatively the manufacturer's identifications may be embossed on the outer PVC sheet together with identification and voltage markings

#### **4.1.1.12.7 Armour**

All cables shall be armoured according to approved manner

#### **4.1.1.12.8 Testing**

Notwithstanding that cables are manufactured to approved standards, all cables, accessories and materials shall be subjected to and withstand satisfactorily the test requirements detailed in this specification. All materials shall withstand such routine tests as are customary in the

manufacture of the cables and accessories included in the Contract. The manufacturer shall have established a quality control system based on regularly accelerated test of production samples according to CENELEC HD605. This system shall be described in the Bid.

#### **4.1.1.12.9 Sealing and drumming**

The cable shall be wound on strong drums arranged to take a round spindle of a section adequate to support the loaded cable drum during installation and handling. The drums shall be lagged with closely fitting battens that shall be securely fixed to prevent damage to the cable. Wooden drums shall be constructed of seasoned timber to prevent shrinkage of drums during shipment and subsequent storage at site. Each drum shall be clearly marked including indication of direction of rolling.

The ends of the cables shall be suitably sealed to prevent ingress of moisture. The end of the cable left projecting from the drum shall be securely protected against damage by mishandling during transport and storage.

#### **4.1.1.12.10 Current carrying Capacity and Design Parameters**

The maximum continuous current carrying capacity and maximum permissible continuous conductor temperature, and the factors for determining such rating and temperature shall be based on recommendations found in IEC 60287, subsequent amendments and all conditions prevailing on the Site

#### **4.1.1.12.11 Terminations**

Detailed drawings showing the types of cable sealing ends, terminal arrangements shall be submitted to the Project Manager for approval. Stress cones or other approved means shall be provided for grading the voltage stress on the core insulation of the cables.

The terminations and joints for the cables shall be of an appropriate heat shrink or cold type jointing kits incorporating a suitable arrangement for stress control, and rain sheds for outdoor use.

Termination kits shall include suitable heat shrink tubing to effectively shroud, seal and insulate the exposed cable conductor and shall include a heat shrink glove to effectively seal the crutch of the cable to prevent ingress of moisture into the interstices of the cable. Suitable arrangements shall be provided to earth the cable screens and armour

Terminations into cable boxes shall include brass compression glands and back nuts of the correct size, which shall secure the cable outer sheath and ensure effective continuity between the cable armouring wires and the metal enclosures on which the cables are terminated. At all rising terminations the cable inner sheath shall pass through the gland to terminate not less than 6 mm above the gland

#### **4.1.1.12.12 Joint and termination material**

Heat shrinking tubing and moulded parts shall be flexible, flame retardant, polyofin-based material of electrical insulating quality, and shall be obtained from an approved manufacturer. They shall be suitable for use indoors or outdoors in the conditions prevailing on site

The material shall reduce to predetermined size and shape when heated above 120 °C. The components shall also be provided with an internal coating of hot melt adhesive compound

that shall not flow or exude at temperature below 85 °C. All parts and materials shall be tested to a program of tests to be agreed with the manufacturer.

Each part shall bear the manufacturer's mark, part number and any other necessary marking to ensure correct identification for use on the correct size and type of cable. Each set of parts shall be packed as one unit with full and complete installation instruction and clearly marked to show the application.

#### 4.1.1.13 **Auxiliary Supply and Substation Lighting**

##### 4.1.1.13.1 **General**

This section covers the technical requirements of the low voltage AC and DC supplies, switchyard lighting and other auxiliary equipment.

The station service is to be supplied from the station transformers. If available a back-up supply from the district grid may be brought in to the station. No more than one station transformer shall be connected to the bus at any time. If the voltage disappears the supply shall automatically be switched over to an alternative supply if such is available.

From the main low voltage switchboard, (AC and DC) feeders shall supply the sub-distribution boards of the plant.

Domestic installations are part of the Civil Works.

The temperature rise of the conductors above ambient air shall not exceed 40 °C at rated current 1250 A in the three phases.

##### 4.1.1.13.2 **Switchboards and Panels AC**

The switchboards and panels shall be designed, constructed and tested in accordance with IEC 60439: Low-voltage Switchgear and Control gear Assemblies.

The boards shall be vermin proof. The boards and panels shall be self-ventilated. No ventilating fans shall be used.

Permissible temperature rise shall not be exceeded even when the free space available for future feeders is mounted with feeder equipment and loaded with rated current.

The covers (outside covers and doors, including hinges and locks) shall safely withstand the overpressure caused by short circuit currents and shall protect personnel against injury.

The main switchboards and the larger ones of the sub-distributions shall be of the floor mounted prefabricated metal enclosed type, with separate compartments for each feeder, etc. Small sub-distributions may be of the wall mounted steel sheet or cast metal type.

All boards and panels shall be designed for easy access to the equipment, cable terminals, etc. during erection, maintenance, disassembly and extensions.

In addition to the required number of outgoing circuits, one more of each rating employed shall be fully equipped ready for connection of future circuits. Furthermore, each board and panel shall have at least 20% free space available for future extensions.

The main switchboard shall be designed so that additional panels can be added in the future (including possibilities for extending the busbars).



Operating handles, operating switches and push buttons, signalling lamps, position indicators, instruments, etc., shall be placed on the fronts. Relays which are not incorporated on the circuit breakers shall be placed in separated compartments, metal shielded from the current carrying parts.

The busbars shall be of copper and shall have three phases and neutral. A grounding bar of copper shall also be provided and a grounding conductor connection shall be brought to each feeder compartment, where the feeder grounding conductor can be connected to it.

#### **4.1.1.13.3 Circuit Breakers and Fuses**

In general, circuit breakers shall be used for all feeders and distribution circuits. Miniature circuit breakers, MCB's, may be used on small circuits. The breakers shall be rated for full short circuit power. No back up fuses shall be used.

Fuses may be used in exceptional cases such as on very light loaded circuits, or in combination with small contactors and where the use of fuses is justified for the purpose of selectivity.

In the design of the distribution systems and in the selection of circuit breakers, MCB's, fuses and protection relays due attention shall be paid to the selectivity of breaker tripping at overloads and at short circuits. Full selectivity shall be achieved, only the feeder or circuit which has an overload or short circuit shall trip.

Undelayed MCB's shall be used only as the last breaker of a circuit. Selectivity between MCB's and fuses shall be proved, with ample margin.

The circuit breakers shall be manually operated, except for the breakers in the feeders from the auxiliary transformer which shall be electrically operated.

All circuit breakers and MCB's shall have three-phase overload and short circuit protection to be provided as a part of the breaker assembly or provided separately as for the transformer circuit breaker (in this case separate current transformers shall be included). The ratings of the overload and the short circuit protections shall be selected according to the current rating of the cable or circuit to be protected, and in accordance with the requirements of the selectivity as stated above.

The breakers for DC shall be two-pole, and with thermal overload and magnetic short-circuit protection in both poles. All such circuit breakers, miniature circuit breakers, switches, contactors, fuses, etc., shall be of a type specifically designated for the use on DC, and the dynamic current and the making and breaking capacities shall be ample for the short-circuit power of the batteries.

All DC circuit breakers, miniature circuit breakers, switches and contactors shall have an alarm contact or an under voltage relay with alarm contact shall be provided.

Circuit breakers on the main DC switchboards which are rated 50 A and higher shall be withdrawable

#### **4.1.1.13.4 Current Transformers**

The current transformers shall have synthetic resin insulation or equivalent dry insulation.

The cores for measuring purposes of current transformers shall have accuracy class 1 and instrument security factor less than or equal to 5. The cores for protection shall have accuracy class 5P and accuracy limit factor greater than or equal to 10.

Power frequency test voltages, 1 minute:

- Overtoltage inter-turn test 3.5 kV
- Secondaries 2.5 kV

#### **4.1.1.13.5 Instruments and Relays**

The instruments shall be 96 x 96 mm square pattern with (at least) 90° pointer deflection.

Instruments shall be of the three element type, for unbalanced three-phase load and loaded neutral conductor.

The relays shall preferably be of the solid state type. The instruments and relays shall, as far as applicable, be of the same make and type as those of the other parts of the plant.

#### **4.1.1.13.6 Tests**

Tests shall be made in accordance with the applicable standards.

### **4.1.1.14 415/240V Auxiliary Supply**

#### **4.1.1.14.1 Auxiliary Transformers**

Station transformers are part of the scope of supply.

#### **4.1.1.14.2 Distribution Boards**

Current carrying capacity of main transformer circuit breaker and alternate supply shall not be less than 200 A. The two sources shall be switched by a change over system that will select between the sources and shall be arranged within the main board and incorporate a manual by-pass switch. For 23MVA substations and above the changeover system shall be Automatic with 240VAC controls circuits with auto/manual operation selection.

The board shall be equipped with instruments for measuring of current and voltage in all phases both on the incoming lines and busbars. Also incorporated shall be phase failure relay, phase rotation relays and energy meters for recording of energy consumption. The Busbars shall be copper with continuous current rating of the phases and neutral from the transformer and alternative source in the main switchboard be at least 200 A. The current rating of the feeders shall be ample for the actual load and have at least 50% reserve capacity compared to the actual load.

The figures given in these specifications are indicative only. Only a limited number of different makes, types and ratings shall be used, for the purpose of standardisation and interchangeability.

#### **4.1.1.14.3 Switchyard Lighting**

The switchyard lighting shall be by means of floodlights with 400 W for bay lighting and 70 W for perimeter lighting. The lighting shall be constructed with high pressure sodium lamps. The housing shall be of high pressure die-cast aluminium with a non-corrosive finish. Refracting front covers of etched vandal-resistant polycarbonate shall be provided. The enclosure protection shall be min. IP65. The switch bay and transformer illumination level shall be 50 lux on 0.85m height in the switchyard and for the transformers. The perimeter

illumination level shall be 5 lux. The perimeter lighting shall be controlled by photocells. All necessary supports, fixing material and cabling from the distribution board shall be included.

#### **4.1.1.14.4 DC Emergency Lighting**

Emergency lighting is provided for in under Civil Works.

#### **4.1.1.14.5 Hand Lamps and Portable Hand Sets**

The portable battery handsets are for additional DC lighting during maintenance works, etc., in case of AC failure. A locker, with the provisions of housing two handsets, shall be placed in the entrance hall of the substation. AC socket outlets shall be fitted in the locker for continuous charging of the batteries. The charging control shall be automatic and a pilot lamp shall indicate that charging is on. The handsets shall be provided with on/off switch.

The handset shall give flow of approximately 200 lumen, and the battery shall have the capacity of running the lamp for 2 hours. A type with a short fluorescent tube is preferred.

#### **4.1.1.14.6 Clock**

A clock shall be installed in the control room. It shall be of the analogue type, having continuously moving hands. For temperature variations between -1 and +40°C with ambient relative humidity of up to 80%, the clock accuracy shall be better than +/-2 seconds deviation in 30 days.

### **4.1.1.15 DC SUPPLY**

#### **4.1.1.15.1 General**

This section covers the technical requirements of the batteries and battery chargers, the main DC switchboards and the sub-distribution boards and panels for the DC auxiliary supply of the plants.

#### **4.1.1.15.2 Distribution Boards**

The DC busbars shall have two poles. The bars and the connection conductors to the breakers shall be insulated. All boards shall have instruments for reading of voltage and current (two directions) and be equipped with relays giving alarm by high and low voltage and by earth leakage in all insulated poles.

110 V DC shall be used for the main circuits of the control and protection and for DC motors, unless otherwise stated in Scope of Works.

For HV stations the 110 V DC shall comprise of two independent systems i.e. double batteries and chargers allowing one system to carry all loads while the other system is out of services or when boost charging one battery. The two 110 V batteries shall be located in separate rooms.

Under normal operational conditions the two systems shall each carry 50% of the load. Trip 1 circuits and trip 2 circuits shall be connected to separate systems.

All boards and panels shall be supplied with the necessary internal wiring. Battery connections and cabling in the battery rooms shall also be included.

Miniature circuit breakers and DC distributions for control, protection, etc., and which are placed on the control, measuring and protection boards shall be included in those boards.

All instruments and protection relays on the rectifiers and on the boards and panels shall be included.

Starters, contactors and protection for motors shall be included whenever such equipment is not provided as part of the motor supply.

#### **4.1.1.15.3 Batteries**

The Contractor shall calculate and determine the battery capacities, the power ratings of the chargers, the number of sub-distribution boards, the number and size of circuits, etc., to suit the requirements of the equipment to be installed, but also considering the future extensions as indicated on the drawings.

The number of cells shall be selected so that the voltage of the battery does not exceed 110% of the rated voltage during float charging.

The capacities of the batteries shall be selected to permit a 10 hour service without AC power with DC loads as specified below. At the end of this period the voltage of the DC networks (measured on the busbars of the main distributions) shall be at least 90% of the rated voltage with the batteries being loaded as specified.

The 30 V or 110 V batteries shall be loaded with the switchyard load.

Alarms shall be provided for battery faults.

The batteries shall be of the Nickel Cadmium type.

The polarity of the cells, and of the complete battery, shall be engraved and easily legible. Bolted insulated interconnections between the cells shall be included.

#### **4.1.1.15.4 Chargers**

The rated current of the battery chargers shall be selected to allow for recharging a fully discharged battery in 5 hours, in addition to simultaneously supplying the DC load.

In addition the chargers shall comply with the following technical data and requirements:

|   |   |
|---|---|
| Power supply                                | 415 V AC three-phase or 240 V AC single-phase   |
| Output voltage adjustable between           | 110 V or 30 V $\pm$ 15%   |
| Stability of the output voltage             | less than $\pm$ 1% for the maximum input voltage and frequency variations, and from 1% to 95% of rated output current |
| Maximum deviation of the current limitation | +/- 2% of rated current   |
| Ripple of output voltage                    |   |
| without the battery connected               | less than 4% peak-peak of the rated output voltage  |
| with battery connected                      | less than 1% peak-peak of the rated output voltage  |

Dry type transformers and solid state (thyristor or transistor) rectifiers shall be used throughout. Each charger shall be supplied with reactor to reduce ripples.

The chargers shall be completely equipped for a fully automatic and controlled charging and float charging of the batteries, and shall be of a constant voltage type with current-limiting device.

Each of the charges for the 110 V or 30 V batteries shall be rated to maintain normal charging and float-charging of both batteries.

By means of an automatic change-over switch the charger shall change from normal charging and float-charging to boost charging of the battery. After the boost charging, the charger shall switch back to float charging.

Each charger shall be complete with instruments, breakers and protection, including but not limited to:

- Breakers and protection on AC and DC side, with alarm contacts
- One V-meter for the DC voltage
- One A-meter for the DC current
- One lamp indicating that the charger is charging
- Alarms for "high volts", "low volts", "earth fault" and "fail"

The above devices shall be placed on the front of the charger cubicle and the alarms shall also be transferred to the National Control Centre.

#### 4.1.1.15.5 Battery Conductors and Fuses

Conductors from the batteries to the fuse boxes shall be mounted short circuit and earth fault proof. That is, the conductors shall be single pole insulated and in addition placed on insulators, separate for each pole. All conductors shall be placed at minimum 5 cm distance from each other, even at crossings.

The conductors shall lead through insulating pipes in the wall of the battery room to closed fuse boxes made of insulating material on the wall outside the battery room. For the 110 V or 30 VDC system there shall be one box for pole. The wall-holes shall be tightened against gas intrusion.

### **Specifications for 48 V DC battery charger and batteries**

The batteries and charger shall be suitable for continuous indoor operation in tropical areas with the following atmospheric conditions.

- (a) Altitude: 2200m above mean sea level
- (b) Pollution: heavy saline atmosphere
- (c) Humidity: up to 90%

Ambient temperatures of +30° C average, (+40° C Max. and -1° C Min).

The battery and charger sets shall be sized to adequately supply the loads to be connected to the battery. The rectifier output shall be  $k \times S$  where

$k = 1.5$

S = sum of the following:

- input power in kVA of the largest tendered RTU
- input power to the new telecommunication equipment provided under the contract.

The battery capacity shall be  $C = 1.5 \times C_n$ , where  $C_n$  is the capacity to feed the above total load for eight (8) hours. This requirement shall be tested during SAT.

The battery chargers shall provide normal system power and shall be capable of recharging a fully discharged battery in twelve hours while supplying normal system power. The chargers shall have 240 volt, 1 phase input power.

The batteries shall be sealed, maintenance free lead acid type. As they are sealed, there are no special ventilation requirements, and as such the batteries may even be placed in the substation control rooms or communications equipment rooms.

A low voltage disconnect switch shall be provided for protection of the battery. The 48 Volt DC system distribution panel shall be a fused switch distribution panel board. The low voltage disconnect switch and fuse panel shall be provided with local alarms as well as alarm contacts. The low voltage disconnect switch shall be equipped with external by-pass switch to be used for maintenance purposes.

Detailed drawings and operations manuals shall be provided in duplicate copies and softcopy. Design drawings shall be provided for approval before manufacture.

### **Batteries**

The batteries shall be of the maintenance-free, sealed lead acid type. The type and rating shall be in accordance with the prevailing environment and suppliers standard voltage level.

The batteries shall be mounted on wood or metal stands or racks in a way that all plates of each cell are visible for maintenance purposes. The stands or racks shall have a maximum of two tiers.

The Contractor shall be entirely responsible for carrying out and completing the initial charge, test discharge and subsequent recharge. The final test discharge shall be made at the site.

### **48 VDC Charger**

The battery charger shall operate satisfactorily with input AC supply single phase 240V +-15%, 50 Hz +-2.5 Hz, harmonic level H4 (less than 20%).

On the input of the rectifier/battery charger there shall be an isolating transformer.

The charger shall be of a modified constant voltage type (constant voltage and current limit) capable of providing a continuous float charge to the batteries with at least C/20 A current when delivering the total inverter rated load.

The charger shall be equipped with a total current limit and a separate battery current limit (10 - 50% of total rectifier current), independently adjustable for each of the charging modes:

Trickle charging and floating operation 2.3 V/cell and stand-by parallel operation 2.23 V/cell shall be possible.

Controls shall be provided to vary the DC voltage within the output range. The DC voltage shall remain constant within  $\pm 2\%$  of its preset value over the full current range of the rectifier/charger and simultaneous AC mains fluctuations  $400V \pm 15\%$ ,  $50 \text{ Hz} \pm 2.5 \text{ Hz}$ .

The output ripple shall not exceed 1% peak-to-peak measured across the output of the charger when connected to its associated battery.

In the output of the rectifier there shall be a fuse with alarm contact on the negative terminal only (positive earthed system).

When the battery is connected to the charger the psophometric noise level at the output, for loads between 0% and 100%, shall not exceed the equivalent of 1 mV at a frequency of 800 Hz after weighting as specified by CCIF.

### **Alarms and metering**

The following alarms and indications shall be provided:

rectifier failure: high/low DC voltage, mains failure, rectifier fault  
battery breaker status  
status of the on-load isolating switches.

The following metering instruments (class 1.5) shall be included in each rectifier:

V-meter for rectifier input  
A-meter for battery current  
V-meter for rectifier output  
A-meter for rectifier output.

### **Inspection and Testing**

The batteries shall be tested in accordance with the requirements of IEC 60285 and Kenya Bureau of Standards.

KPLC reserves the right to inspect the equipment for acceptance tests, at the manufacturer's place where routine tests and temperature rise shall be performed. Test certificates for Batteries and charger shall be provided.

**SECTION - VI**

**PARTICULAR TECHNICAL SPECIFICATIONS**

**SUBSTATIONS**

**CONTROL, PROTECTION**



## TABLE OF CONTENTS

|            |  |    |
|------------|--|----|
| 4.1.2      | <i>Control, protection and cabling – Substations</i> .....                   | 32 |
| 4.1.2.1    | Control Protection and Metering .....  | 32 |
| 4.1.2.1.1  | General .....  | 32 |
| 4.1.2.1.2  | Overview of Substation Automation System - SAS .....                         | 32 |
| 4.1.2.1.3  | Design of SAS .....  | 33 |
| 4.1.2.1.4  | Control Stations .....   | 38 |
| 4.1.2.1.5  | Automatic Voltage Regulator .....  | 39 |
| 4.1.2.1.6  | Indicating and Metering Instruments and Metering Transducers (if used) ..... | 40 |
| 4.1.2.2    | Factory Acceptance Test .....  | 40 |
| 4.1.2.3    | Training .....   | 40 |
| 4.1.2.4    | Spare Parts and Tools .....  | 41 |
| 4.1.2.5    | System Maintenance .....   | 41 |
| 4.1.2.6    | Protection .....   | 41 |
| 4.1.2.6.1  | General Requirements .....   | 41 |
| 4.1.2.6.2  | Relay Construction and Mounting .....  | 41 |
| 4.1.2.6.3  | Relay Testing Facilities .....   | 43 |
| 4.1.2.6.4  | Fault Clearing Time .....  | 43 |
| 4.1.2.6.5  | Trip Circuits .....  | 43 |
| 4.1.2.6.6  | Fault Recorder and Fault Locators .....                                      | 43 |
| 4.1.2.6.7  | Supervision .....  | 43 |
| 4.1.2.6.8  | Protection of HV System .....  | 44 |
| 4.1.2.6.9  | Synchronizing Equipment .....  | 49 |
| 4.1.2.6.10 | Relay Test Equipment .....   | 49 |
| 4.1.2.6.11 | Relay Settings .....   | 49 |
| 4.1.2.7    | Metering .....   | 49 |
| 4.1.2.7.1  | Meters of Outgoing 33kV and 11kV lines .....                                 | 49 |
| 4.1.2.8    | LV cables and Cable Racks .....  | 51 |
| 4.1.2.8.1  | General .....  | 51 |
| 4.1.2.8.2  | Technical Requirements - Cables .....  | 51 |
| 4.1.2.8.3  | Cable Laying .....   | 52 |
| 4.1.2.8.4  | Diagrams and Calculations .....  | 52 |
| 4.1.2.8.5  | Tests .....  | 52 |
| 4.1.2.9    | Earthing (Grounding) System .....  | 52 |
| 4.1.2.9.1  | General .....  | 52 |
| 4.1.2.9.2  | Technical Requirements, General .....  | 53 |
| 4.1.2.9.3  | Earthing Electrode System Under the Control Building .....                   | 54 |
| 4.1.2.9.4  | Earthing Electrode System of the Switchyard .....                            | 55 |
| 4.1.2.9.5  | Earthing Conductors .....  | 55 |
| 4.1.2.10   | Site and Commissioning Tests .....   | 56 |
| 4.1.2.10.1 | General .....  | 56 |
| 4.1.2.10.2 | Test of Wiring .....   | 56 |
| 4.1.2.10.3 | Test of Relays .....   | 57 |
| 4.1.2.10.4 | Test of DC. Circuits .....   | 57 |
| 4.1.2.10.5 | Test of Instruments .....  | 57 |
| 4.1.2.10.6 | Tests on Conductors, Insulators and Accessories .....                        | 57 |
| 4.1.2.10.7 | Tests on the Switchyard on Site .....  | 57 |
| 4.1.2.10.8 | On Load Test .....   | 57 |

## **4.1.2 Control, protection and cabling – Substations**

### **4.1.2.1 Control Protection and Metering**

#### **4.1.2.1.1 General**

The sections below cover the technical requirements for the systems of control, protection, metering and signalling of the sub-stations. The control and relay boards shall include all equipment as specified in Scope of Works, needed for complete installations. Any computer solution proposed shall be based on hardware and software well proven in HV installations. All data storage media shall be checked for internal faults and virus before delivery.

The supplied and installed instruments, relays, switches and other equipment shall properly match the equipment to which it shall be connected, and which is included in the sections dealing with the different types of switchgear for transformers, transmission lines and other items.

The complete and detailed scheme of control, protection, alarms, etc., shall be proposed by the Contractor for each individual sub-station project. In this detailed planning the Contractor shall carefully consider the future extension of the plants. The Bidder shall guarantee the availability of spares in 10 years from cessation of normal production. This shall be demonstrated in the bid

The control, metering and protection equipment can be placed in common panels but not as integrated functions. The panels shall not be unnecessarily crowded but have space for moderate extensions. All control functions and status indications shall be clearly arranged in a mimic diagram. The bay control unit shall have a mimic diagram for all the equipment in the bay. The equipment shall be on a modular basis connected to terminals inside the panels and easy to replace. For indoor MV switchgear the control and protection can be located in the instrument compartment in the switchboard.

All data and parameters specified to the individual distributed control units, shall be stored in a non-volatile memory so no local logic or information will be lost due to power supply failure.

#### **4.1.2.1.2 Overview of Substation Automation System - SAS**

This Substation Automation System (SAS) comprises full station and bay protection as well as control, monitoring and communication functions and provides all functions required for the safe and reliable operation of the substations.

It shall enable local station control via a Personal Computer (PC) by means of a human machine interface (HMI) and control software package, which shall contain an extensive range of system control and data acquisition (SCADA) functions. It shall include communication gateway, interbay bus, intelligent electronic devices (IED) for bay control and protection.

The communication gateway shall secure the information flow with Regional Control Centres. The interbay bus shall provide independent station-to-bay and bay-to-bay data exchange. The bay level intelligent electronic devices (IED) for protection and control shall provide the direct connection to the switchgear without the need of interposing components and perform control, protection, and monitoring functions.

In order to meet the requirements of this specification the detailed design of the SA is within the manufacturer's responsibility, but subject to approval by KPLC.

This specification covers the design, manufacture, inspection, training and testing at the manufacturer's works and at site, delivery to site, installation and commissioning.

#### **4.1.2.1.3 Design of SAS**

The Substation Automation System (SAS) shall be suitable for operation and maintenance of the complete substation including future extensions. The offered products shall be suitable for efficient and reliable operation of outdoor or indoor substations for distribution and transmission.

The systems shall be of the state-of-the art based on IEC61850, IEC60870-5-101,103,104 for operation under electrical conditions present in high-voltage substations, follow the latest engineering practice, ensure long-term compatibility requirements and continuity of equipment supply and the safety of the operating staff.

The offered SA shall support remote control and monitoring from Regional Control Centre via gateways.

The system shall be designed such that personnel without any background knowledge in microprocessor-based technology are able to operate the system easily after having received some basic training.

Cubicles shall incorporate the control, monitoring and protection functions specified, self-monitoring, signalling and testing facilities, measuring as well as memory functions, event recording and disturbance recording. The basic control functions are to be derived from a modular standardized and type-tested software library.

For safety and availability reasons the Substation Automation System shall be based on a decentralized architecture and on a concept of bay-oriented, distributed intelligence.

Functions shall be decentralized, object-oriented and located as close as possible to the process. The main process information of the station shall be stored in distributed databases.

The typical SA layout shall be structured in two levels, i.e. in a station and a bay level.


The system shall accommodate control, data acquisition, alarm handling and trend analysis. The figure below illustrates the main principles. However, the Employer wants to keep a conventional back up control facility with indication at bay level (local control). I.e. control of motorised breakers and switches, status indication of all breakers and switches, analogue or digital indication of measurands (I and  $I_{max}$  all phases, MW and  $MVA_r$ ) and alarm annunciation shall be presented by discrete components.

The control of high and medium voltage circuit breakers, isolating switches and tap changers shall take place in a hierarchy with four levels as described in Project Specific Data Section. From each level one may block access from higher levels:

The control units shall take auxiliary voltage from the station battery and be equipped with self-supervision systems giving alarm by internal faults.

The system shall be fail-safe keeping all equipment in the last status by loss of communication to higher systems.

The Gateway and Station Industrial Computers shall be housed in panels while the HMI monitors shall be installed in the substation control room/office.

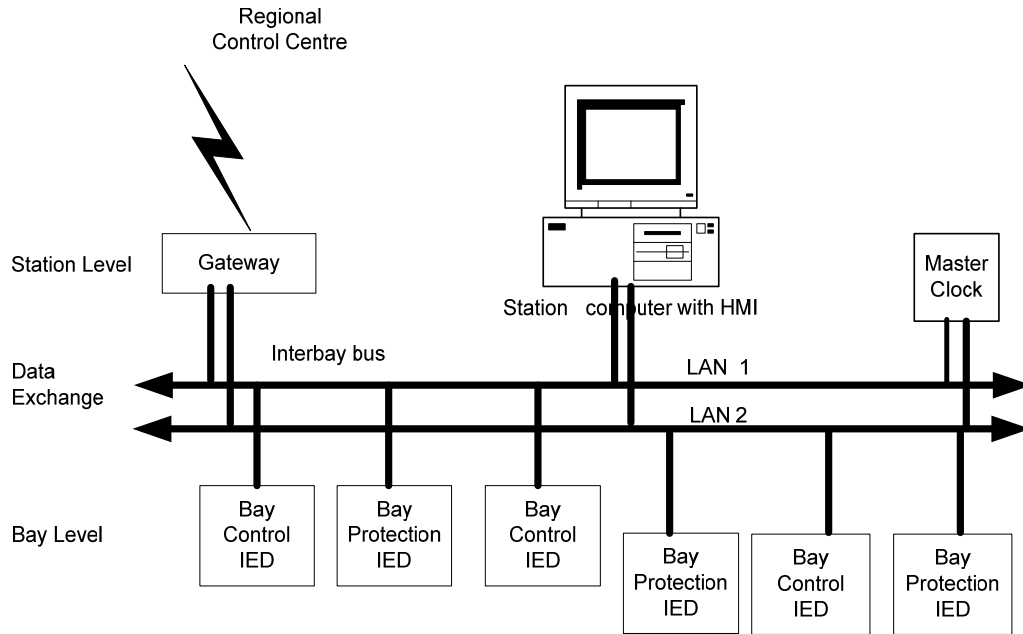

#### System Architecture of Substation Automation

#### Layout is for 23 MVA substations and above: For 7.5 MVA substations, redundancy reduced

At bay level, the IEDs shall provide all bay level functions regarding control, monitoring and protection, inputs for status indication and outputs for commands. The IEDs should be directly connected to the switchgear without any need for additional interposition or transducers.

Each bay control IED shall be independent from each other and its functioning shall not be affected by any fault occurring in any of the other bay control units of the station.

The data exchange between the electronic devices on bay and station level shall take place via the interbay bus. The bus shall be realized using fibre-optic cables or Ethernet.

At station level, the entire station shall be controlled and supervised from the station HMI. It shall be possible to control and monitor the bay from the bay level equipment, in the event that the communication link fails. The station wide interlocking shall also be available when the station computer fails.

To provide highest reliability the station HMI and the gateways shall work completely independent meaning retrieving the process data directly from the bay level devices. Additionally the gateway and the station HMI shall be configured fully redundant to ensure full functionality in case of single point of failure.

Clear control priorities shall prevent that operation of a single switch can be initiated at the same time from more than one of the various control levels, i.e. SCADA, station, bay level or apparatus level. The priority shall always be on the lowest enabled control level.

The station level contains the station-oriented functions, which cannot be realised at bay level, e.g. alarm list or event list related to the entire substation, gateway for the communication with remote control centres.

A dedicated master clock for the synchronization of the entire system shall be provided. This master clock should be independent of the station computer and of the gateway, and should synchronize all devices via the interbay bus.

The SAS shall contain the following main functional parts:

- (i) Human Machine Interface (HMI) with process database
- (ii) Separate gateway for remote supervisory control via SCADA
- (iii) Hot Standby Gateways for stations with transformation capacity of 23 MVA and above.
- (iv) Master clock (e.g. GPS receiver)
- (v) Collection of the relevant data concerning the substation and distribution of the data where needed
- (vi) Bay and station level devices for control, monitoring and protection
- (vii) Bay-oriented local control panels.

#### **4.1.2.1.2.1 Signal List**

The signal list shall be agreed between the KPLC and the Supplier and shall comprise the following;

- Commands for all CBs and motorized switchgear
- Status Indications
- Alarms
- Set Point Regulation
- Measurands
- Reset by SCADA for all Master Trip Relays

The design shall include mapping of the Signal list from the supplier (as addressed & used in the HMI) to the requirements of the Regional Control Centre (supervisory level) signal requirements.

The design of the SAS system shall include the following;

- Control mode selection
- Select-before-execute principle
- Command supervision: Interlocking and blocking  
Double command
  
- Autoreclosing
- Monitoring pole discrepancy and trip function
- Transformer tap changer control
- Display of interlocking and blocking
- Breaker position indication
- Alarm annunciation
- Measurement display
- Local HMI (local guided, emergency mode)
- Data storage for at least 200 events

#### **4.1.2.1.2.2 Select-before-execute**

For safety reasons the command is always given in two stages: selection of the object and command for operation.

These two commands are realized with one contact each; only when both contacts are closed, is the final command (open or close) executed.

#### **4.1.2.1.2.3 Station HMI**

The operator station HMI shall provide basic functions for supervision and control of the substation. The operator shall give commands to the switchgear on the screen via mouse clicks on soft-keys.

The HMI shall give the operator access to alarms and events displayed on the screen. Aside from these lists on the screen, there shall be a printout of alarms or events in an event log.

An acoustic alarm shall indicate abnormalities, and all unacknowledged alarms shall be accessible from any screen selected by the operator.

SAS shall include the following displays & functions:

- Control of all switching devices
- Real time indication of status, alarms and devices
- Display of measured values, high/low limit checking.
- Indication of real and historical values
- Data Archiving
- Disturbance Monitoring and analysis
- Trend display facilities
- Protection device information
- Remote access to SAS from the Central Control Centre via the SCADA system
- Remote communications
- Indication of automatic tap changer relay status
- Manual local and remote setting of tap changer relay
- Self-check & diagnostic: These functions are essential for system operation
- Safety and easy maintenance.
- Manual data setting (can be performed by the operator) using the following functions:
  - ❖ Device status setting
  - ❖ Analogue data setting
  - ❖ Control inhibit setting
  - ❖ Alarm inhibit setting
  - ❖ Maintenance tag setting
  - ❖ High/Low limit setting
  - ❖ Protection relay parameter setting, etc.
- Also, all required signals related to the control, status indications and monitoring of the switchgear and other relevant equipment shall be provided to the SAS.
- Time Tagging

The configuration of the station HMI shall be made using the operator station in the Windows environment. The various functionalities shall be customized by easy-to-use interactive configuration tools. The configuration shall include the visual presentation of the object, adaptations needed in the process database, and adaptations of the communication configuration data.

#### **4.1.2.1.2.4 SAS Equipment**

##### **Substation Computer**

The substation computer coordinates the operation of the SAS. The functionality shall include:

- Alarm Grouping

- Event Logging
- SAS Management software
- The substation master control shall be capable of automatic restart in the event of power failure
- without loss of functionality or local database. It shall be readily possible to update the substation
- computer software to alter or extend the SAS functionality. The Tenderer shall state how this is achieved.

#### **Substation Local Area Network**

Local substation communications shall use Ethernet LAN to connect the components of the SAS using open international IEC 61850 protocol. . The LAN may be of star-coupler configuration. Fibre optic can be used only in instances where the lengths are too long to be handled by Ethernet LANS. No single point of failure of the substation LAN shall result in any loss of substation control functionality.

The station controller must be able to receive and transmit information from future extensions on an IEC 61850 protocol.

#### **Operator Workstation**

- The Operator workstations / HMIs shall consist of high performance computer and monitor with computer desk. It shall be fully integrated into the SAS on the substation LAN. The proposed HMI shall be based on the latest PC technology available on the market at the time of offering.
- The operator desk and chair shall be of high quality construction, appropriate to continuous use by the operator.

#### **Printers**

- Two high performance printers shall be provided, each capable of connection to the substation LAN.
- 1 off Matrix printer Logger, for events and for operator log.
- 1 off Colour Printer to print screen shots or other information

#### **Satellite Clock**

- Time synchronization and event time tagging with resolution of at least 1 ms shall be provided by a satellite GPS clock signal as the Master clock, The secondary clock shall be provided via the SCADA system.
- 

#### **Audible Alarm**

- One common sounder should be provided to give at least two distinct audible alarms in case of alarms/faults or events.
- The sounder shall be configurable according to the event type and to the control status of the SAS (Local/Remote). An auto-silencing scheme shall be provided for the alarm and the sounder shall be controlled by distinctly labeled “Audible alarm ON/OFF” control switch.
- The complete unit may be mounted in suitable relay/control panel.

#### **Common Bay Unit**

- The Common Bay Unit (CBU) shall be provided for monitoring of common services. The CBU shall be located in Control/Relay Room.

#### **4.1.2.1.2.5 Data Transmission**

- The SAS shall be able to communicate with the ABB type SCADA system using a variety of open protocols. The RCC shall be capable of remote access to the SAS via the SCADA system. The protocols currently supported are IEC 60870-5-101 & IEC 60870-5-104.
- This communication link must be via an approved communication mode complete with the terminal equipment all supplied, installed & commissioned by the Contractor.
- 

#### **4.1.2.1.4 Control Stations**

##### **4.1.2.1.2.1 Distributed Control Units**

Outdoor switchgear shall have a control and relay panel in the control room with facilities for Local Control. The local control for indoor breakers can be located in the instrument cabinet. The protection and control functions can also be combined in one unit. Signals from protection equipment can alternatively be hardwired to bay control unit.

The bay control unit shall handle position indications from circuit breakers, disconnectors, earthing switches and transformer tap changer. It shall control closing and opening of circuit breakers and receive time tag, store and display alarms and measurements.

The position indication from the on load tap changer shall be taken from a potentiometer switch supplied and mounted on the transformer.

The alarm handling capacity must be sufficient to handle all normal alarms from the switchgear, the protection, the transformer and the tap changer.

All commands from the remote and supervisory control can be given to bay control unit, which execute the commands. Conventional interlocks should be retained.

All microprocessor based control equipment such as bay control units shall be galvanic ally isolated from the environments outside panels, using opto couplers or interposing relays for signals, galvanic isolated measuring transducers for measurements and relays or contactors for commands.

All data and parameters specified to the individual distributed control units, shall be stored in a non-volatile memory so no local logic or information will be lost due to power supply failure.

Editing and input of local data and parameters shall be performed locally by suitable programming equipment to be included in the supply. Preferably it should also be possible to edit any such local data at higher control level and download this information.

##### **4.1.2.1.2.2 Interface with Supervisory Control and Data Facilities**

In order to interface and achieve the desired functionality of the SCADA/EMS system, data concentrators in substations shall be based on standard IEC 60870-5-104 protocol.

The following SCADA facilities shall be available from the substation.



- Supervisory control of all circuit breakers and motorized line and bus bar isolators and remote control of on-load tap changers.
- Status Indications of all circuit breakers, isolators, positions of on-load tap changers and 'local/remote', 'Automatic/ Manual', Main/Follower mode of automatic voltage regulators where applicable. These shall be reported by exception, but system shall allow scan by demand.
- Alarms; Bay alarms, Transformer alarms, Bus bar alarms, station alarms and warning shall be collected by the SCADA.
- Measurements; bus bar voltages, frequency active & reactive power, 30, 48 & 110 V DC voltages and line currents.
- Energy measurements, this shall be at interconnection points and feeders.

Where data concentrators will capture and process data for transmission to the control centres it is expected that the following functions shall be provided:

- - Single command outputs, double command outputs for supervisory (on/off) control of circuit breakers, isolators etc with check-before-execute function.
  - Regulation command outputs e.g. raise/lower command outputs for transformer tap changer control and set point transmission with validity check before execution.
  - Resetting of Lock Out Trip Relays on individual circuits.
  - Single and double state digital inputs. Each status (open/closed) of two state devices such as circuit breakers or isolator position should be acquired independent from each other and checked for validity. Undefined states like open and closed or neither open nor closed shall be alarmed with run-time monitoring adapted to the HV equipment operation parameters.
  - Transformer tap changer position indication should be processed as coded signals, by digital measurement input modules.
  - Analogue measured inputs with pre-processing including validity check, local limit supervision and measurement transmission on exception (only if a significant individually selectable change occurs).
  - Measurement transmission with a resolution of at least 10 bit plus sign as this is the most economical way to increase the overall accuracy of the measurements.
  - Metering pulse inputs for acquisition of energy values with internal storage to allow cyclic acquisition of meter readings.
  - Sequential event recording with time stamping of events (time stamp 10ms, resolution 1 ms)
  - Selectable priority levels for data acquisition to speed up the acquisition of circuit breaker status changes and important measurements.

#### 4.1.2.1.5 Automatic Voltage Regulator

The transformer bay shall be equipped with an automatic voltage regulator acting on the on load tap changer. The automatic voltage regulation function shall pursue to keep a constant (but adjustable) voltage on the low voltage side of the transformer by raising or lowering the tap changer (however, an appropriate hysteresis shall be included to avoid over-frequent tapping). The regulation shall be achieved either by a freestanding relay or as a function in the control system.

If connected in parallel, in order to prevent circulating current or negative reactance system: the transformers shall be regulated in a master-slave mode, where each transformer can be selected as master. If the master transformer is out of service another transformer shall take over as master.

Manual switchover to conventional tap changing (local and remote) shall be accommodated.

Necessary blocking by out of range stepping (including inappropriate difference between parallel units) and disconnected transformer shall be included. The actual tap position shall be displayed locally and remote as well as the identification of the master unit.

#### **4.1.2.1.6 Indicating and Metering Instruments and Metering Transducers (if used)**

Remote indication of measurands shall take place on the station controller's VDU. Where local instruments are used, they shall be of the dial type which is easily legible, with black graduations and numerals on a white background. The instruments shall have a dimension of 96 x 96 mm. The error of the instruments shall be maximum 1.5% reckoned on the total length of the scale. All instruments shall be of a narrow frame type.

Preferably the measurements shall be performed directly in the SAS or in the protection relays. However, if needed, the metering transducers (converters) shall be installed in the boards and shall be suitable for connection to the potential and current transformers. The cases shall be hermetically sealed against moisture and dust. Transducer output shall be an impressed DC current of 0-10 mA output. The maximum meter reading at the receiving end shall be equivalent to 30% overload of the source value. The permitted resistive load shall be at least 1000 ohms. The accuracy class shall be minimum 1%. The auxiliary voltage, if required (preferably not) shall be 110 V or 30 V DC.

The W and VAR measurements shall be of the three-element (three-wattmeter) type when connected to primary systems with grounded neutral. W and VAR measurements for transmission lines, shall be such that the direction of the power flow is indicated by negative direction towards the substation and positive direction out of the substation. The voltage shall be measured phase-phase voltage, one reading is sufficient.

The scale on the different types of instruments shall be proposed by the Contractor and be subject to approval by the Project Manager.

#### **4.1.2.2 Factory Acceptance Test**

The Control system with Station Control Unit and Field Units shall undergo a factory acceptance test where the total system is connected and all measurements and controls are simulated.

#### **4.1.2.3 Training**

An in-depth training in the application, fault finding and maintenance of the control system shall be provided. The training must include but not be limited to the following:

- System configuration
- Programming tools
- Picture editing
- Operating system
- System maintenance
- Any other training regarded necessary by the Bidder
- Communication protocols, IEC 60870-101/104, IEC 61850
- Protection device settings and configurations

#### **4.1.2.4 Spare Parts and Tools**

The Contractor shall furnish a list of recommended spare parts and test equipment for the purchased system to maintain reliable SAS operation. The spare parts list shall be subdivided into:

- short-term spare parts that are necessary for two (2) years of operation. These spare parts shall be included in the contract and shall comprise at least one spare module for supplied equipment and basic tools for system maintenance.
- long-term spare parts that are necessary for ten (10) years of operation.

#### **4.1.2.5 System Maintenance**

Editing and input of local data and parameters shall be performed locally by suitable programming equipment to be included in the supply. Preferably it should also be possible to edit any such local data at higher control level and download this information. The programming equipment shall also be suitable for fault diagnostic.

- Laptop Computer for maintenance, information transfer and emergency HMI
- A Personal Computer (PC) as a service unit shall be foreseen for on-site modifications of the control and protection devices. This service unit shall be used for documentation, testing, commissioning & future maintenance work on the SAS.
- Licences for configuration of supplied equipment shall be in scope of supply.

#### **4.1.2.6 Protection**

##### **4.1.2.6.1 General Requirements**

The protection relays to be installed for the protection of transmission lines, transformers and other HV/MV equipment shall be numeric of robust type, insensitive to changes of temperature, vibration, etc.

Input from the measuring transformers shall be based on 1A, 110 V AC. The relay's power supply must accept a rated operating voltage input range from 24-240 V AC/DC without the use of external resistors and without external reconnections and shall be designed to withstand the high voltage interference which is normally experienced in high voltage switching stations.

There shall be galvanic isolation on all inputs and outputs including power supply input. Isolated opto inputs must accept a rated operating voltage from 24-240 V AC/DC without the use of external resistors and without external reconnections.

The Contractor shall endeavour to standardise the equipment by using as few different types of instruments, relays, switches and other devices as possible.

##### **4.1.2.6.2 Relay Construction and Mounting**

The relays shall comply with the requirements of IEC 60255. Modular constructed equipment shall be tested as a complete assembly and details of such tests shall be agreed with the Project Manager when details of the construction are known. Constructional details shall satisfy the following requirements as appropriate:

Relay contacts shall be suitable for making and breaking of the maximum currents which they require in normal service: The protective relays shall be provided with sufficient contacts for circuit breaker tripping. All protective relays, which initiate tripping, shall have not less than

two independent pairs of contacts of which one shall operate the tripping relay or circuit breaker trip coil without the interposition of auxiliary contactors and without the use of reinforcing contactors.

A watchdog relay must detect internal fault including low auxiliary voltage. The auxiliary voltage supply to each discriminative relay unit shall be continuously monitored and an alarm shall be given whenever the voltage exceeds the limits for reliable protection operation.

The measured service currents and/or service voltages must be visible at the front display of the relay. In order to see all values at the same time, a four-line front display must be used. It shall also be possible to select default display.

The relay must store a record of the fault-trip values to facilitate post fault analysis including, such as currents, voltages, operating time identification of the faulted phase and faulted zone etc. The values must be available at the front display of the relay and transferable to the supervisory system. The storage must not be dependable of the auxiliary supply.

It must be possible to do all settings both from the relay front panel and/or with a PC through connection in the front panel of the relay

The relay must have a complete number keyboard in the front panel for settings and downloading of measured values on the front panel display

Wherever practicable the design of the relay schemes shall be based on the "fail-safe" principle. For example, care shall be taken to ensure that loss of DC supply or an open circuit does not cause incorrect opening or closing of circuit breaker. Circuit breaker or disconnecter repeat relays should be of the on-latching type and a discrepancy alarm shall be provided to check correct operation of the relays following a circuit breaker or disconnecter operation.

The lockout tripping relays shall be of the latching type and shall be hand and electrically reset.

In order to achieve a high degree of security in function, the protection system of each high voltage main component (lines, power transformers, shunt reactors, etc.) shall consist of two separated protection sets, main 1 and main 2 where applicable. Where two protection sets cover the same fault they shall be divided into two electrically and mechanically separate parts by means of:

- Separated DC power supply,
- separated boards,
- separate current transformer cores,
- separate voltage circuits,
- separated tripping devices,
- separate tripping coils,
- separated cables,
- separated relay protection channels.

The restricted earthfault and differential functions for the transformers shall also follow the same principle for separation as outlined above.

The Auxiliary relays for protection trip shall have operating speed of less than 7 millisecond. Strict requirements shall be given on selectivity in isolation. Only the minimum possible part of the plant shall be tripped to isolate the fault or clear the abnormal conditions.

The Contractor shall for each substation carry out the protection plan for relay settings. The plan shall be submitted to the Project Manager for approval.

All necessary intermediate current and voltage transformers, converters and auxiliary power supply units shall form part of the supply.

The user manuals must be user-friendly and divided into one general hardware and software description and one setting manual describing only the specified functions and necessary settings for the different types of relays

#### **4.1.2.6.3 Relay Testing Facilities**

Each protection relay shall be provided with facilities for the connection of relay testing equipment. The facilities shall include plugs for connecting the testing equipment and switches for disconnecting the primary circuit of the relay, short circuiting current transformer circuits (make before break) and disconnecting the tripping circuit.

Programmable relays shall be delivered with software and software licences needed for testing, setting and reconfiguration of the relays. If hardware other than laptop is required for this such shall be included in the supply.

#### **4.1.2.6.4 Fault Clearing Time**

The protection system plus the circuit breakers shall have fault clearing time of not more than 60 ms for system voltages 132 kV and above and 100 ms for lower system voltages.

#### **4.1.2.6.5 Trip Circuits**

All trip circuits shall be duplicated with one group tripping the circuit breaker directly and the other routed via a trip relay with heavy duty contacts. All lockout trips shall be routed via a hand reset/electrical reset relay with heavy duty contacts. Closing of circuit breakers from substation control systems or local operation cubicle shall be inhibited if the lockout trip relays are not reset. The trip circuit supervision shall be independent of the protection relays and provided to monitor each pole of each trip circuit on circuit breakers with separate mechanism per pole with the circuit breaker in both the open. The status of the trip circuit shall be indicated on the panel.

An alarm shall be given to signal faulty trip circuits. The alarm shall be time delayed to prevent operation during momentary dips in the DC supply.

#### **4.1.2.6.6 Fault Recorder and Fault Locators**

Fault recorders and fault locators must be integrated in the line protection relays and use the same input parameters as the main protection function. The fault locators must provide records for fault analysis in the “Standard Common Format for Transient Data Exchange (IEEE-COMTRADE)” Necessary signals from the transformers shall be included.

#### **4.1.2.6.7 Supervision**

The supply shall include hardware and software for remote setting, supervision and data acquisition of the protection relays, fault locators and fault recorders. The software will be installed on a central PC with ‘windows XP and windows 7’ operating system. This PC will be shared with other Contractors. The centrally installed software shall make it possible to contact the relays over the telephone network via modems installed in each substation. The Contractor shall supply and install the modems, connect the relays and test the complete chain of control.

The protection relays shall also communicate with the bay control units over the open protocol IEC 61850

#### 4.1.2.6.8 Protection of HV System

##### 4.1.2.6.2.1 66kV Line Protection

Facilities shall be provided to enable one protection (main or backup) to be taken out of service for maintenance or testing without affecting the operation of the other in any way. The facilities shall include duplicate breaker trip coils, separately fused DC circuits and the use of separate CT and VT windings. The protection relays shall be arranged to initiate a single set of auto-reclosing equipment.

The line protection schemes shall contain the following protection relays:

- (i) Distance Protection Relay
- (ii) Three phase directional over current and Earth fault relay
- (iii) Sensitive Earth fault relay
- (iv) Auto reclose Relay
- (v) Trip circuit supervision visible from the front of the panel without having to open the panel door.
- (vi) Autoreclose IN/Out switch
- (vii) Breaker maintenance
- (viii) Breaker failure

(i) Distance Protection

One complete distance relay with full scheme non-switched type for phase/earth and phase/phase faults and with up to four measuring zones. In addition to the above the numerical relays must have the following characteristics:

- Ratings: AC Inputs: 110VAC, 1Amp (three phase).
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- The relays shall be of Numeric design.
- Impedance criteria.
- Three zones phase –phase Protection.
- Three zones phase –earth Protection
- Additional Zone 4 Protection
- Automatic Switch on to fault.
- Independent settings for each zone.
- Distance to fault measurement.
- Display: On operation, the relay should display the faulted phase(s), time and zone of operation and distance to fault.
- Power Swing detection: Blocking/non-blocking selectable by user.
- Scheme communication logic and residual current compensating.
- IDMT Three Phase/Over current & Earth fault Protection.
- Fuse failure supervision.
- Auto- reclose logic 1phase and/or 3 phases.
- Three pole tripping logic.
- Disturbance and event records including software for disturbance analysis.
- Fault record should be incorporated.
- At least six (6) Binary inputs.
- Mho/Quadrilateral characteristics.
- Stability against Switching inrush currents and Reverse faults.
- Clear faulted phase indication.
- Clear fault identification even for boundary conditions.

- Software necessary for all above functions shall be provided.

All these functions must be integrated in a compact package and a user-friendly menu driven interface should be available to enable the setting and testing of the relays.

Three sets of Installation, Commissioning and maintenance manuals and settings software. shall be provided.

(ii) Three Phase Numeric Directional Over Current And Earth Fault Relay

Should incorporate the following features:

- Ratings: AC Inputs: 110VAC, 1Amp (three phase).
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Relay must be of Numerical design.
- Current setting range for over current relay  $0.5I_n-2.4I_n$
- Current setting range for earth fault relay  $0.05I_n-0.8I_n$
- Quadrature connection for polarising voltage ( $V_n=110$ )
- Applicable on the LV side of a Dyn1 transformer
- High set Element, with a setting range of  $1-32I_n$
- The phase and earth directional elements should be individually selectable.
- I.D.M.T characteristics according to BS 142 or IEC 60255 and Definite time characteristic
- The normal operating boundary shall be  $\pm 90$  degrees from relay characteristic angle  
Relay sensitivity should be 1% of rated value of current and current polarising voltage at an angle equal to the relay characteristic angle.
- Time setting multiplier 0.05 - 1.0
- Broken conductor protection feature
- Negative sequence Protection Feature
- High set Element for both over current and earth fault Protection, with a setting range of  $1-30I_n$ .
- Thermal Protection.
- Dedicated Breaker Fail Protection.
- Circuit Breaker Maintenance
- Incorporate Fault records, Event Records and disturbance records.
- Configurable output relays with ability to output starting elements to control Tripping of other upstream Protection relays.

Three sets of Installation, Commissioning and maintenance manuals and settings software. shall be provided.

(iii) Sensitive Earth Fault Relay.

Should incorporate the following Features;

- Ratings: AC Inputs: 1Amp
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Relay must be of Numerical Type
- Current setting range for earth fault relay  $0.005I_n-0.8I_n$
- Definite time delay characteristic; setting range, 0- 30 Seconds.
- Circuit Breaker Maintenance
- Fault records, Event Records and disturbance records.
- Drop off /pickup ratio  $>90\%$

- Low transient overreach < 10%
- 

Three sets of Installation, Commissioning and maintenance manuals and settings software shall be provided.

(iv) Auto Reclose Relay

- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Selectable 1 - 3 autoreclose shots
- Independent set dead time for each shot
- Autoreclose inhibit after manual close
- Separate input for over current high set element and I.D.M.T element
- Autoreclose inhibition for over current high set element.
- 

Three sets of Installation, Commissioning and maintenance manuals and settings software shall be provided.

**4.1.2.6.2.2 Transformer Protection 66/11kV & 33/11 kV Transformers (HV side)**

The protection contains the following protection relays on the HV side:

- (i) Biased differential protection relay for two winding Transformer.
- (ii) HV & LV restricted earth Fault relay. This should include stabilising resistor and voltage dependent resistor (metrosil)
- (iii) HV Three-Phase Over current and Earth fault Protection Relay
- (iv) Auxiliary relays with annunciator for the following transformer functions
  - Tx Buchholz gas
  - Tx Buchholz surge
  - OLTC Buchholz gas
  - OLTC gas relay
  - Pressure relief
  - Winding temperature Alarm
  - Winding temperature trip
  - Oil temperature alarm
  - Oil temperature trip
  - Tx oil level low
  - OLTC oil level low
- (v) Standby earth fault relay.
- (vi) HV Master trip
- (vii) Trip circuit supervision relay for the HV breaker: visible from front of panel without opening relay compartment door.
- (viii)
- (ix) Breaker Fail relay

(i) Biased Differential Protection For A Two Winding Transformer.

Overall differential protection equipped with over current stabilising for external faults and insensitive to in-rush current. The operating time of the protection shall be less than 20ms. This is considered main 1 transformer protection

This should incorporate the following features:

- Ratings: AC Inputs: 1Amp
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Relay Must be of Numerical design
- Pick up setting range, 0.1 to 0.5In
- Should incorporate a high-set Element with a setting range of up to 20In.



- Magnetising current inrush restraint
- Integral CT ratio compensation (0.1-2) and vector group compensation
- Measurement and indication on the MMI, of phase, differential and bias currents
- Storage of Fault records and Event records; the Fault flags should be accessible on the relay LCD screen without opening the relay cover.
- Overfluxing restraint
- Overfluxing protection with Alarm and Trip functions
- 5th harmonic restraint feature on the differential Element.
- Appropriate Dual Bias characteristic to ensure relay stability for heavy through faults
- Should incorporate a disturbance recorder feature.
- Red L.E.D to indicate Tripping
- Relay Self diagnostic and Alarm feature
- Ability to Latch output contacts to prevent TX re-energizing before carrying out investigations.

(ii) Three Phase Numeric IDMTL Over Current And Earth Fault Relay

Should incorporate the following Features;

- Ratings: AC Inputs: 1Amp
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Relay must be of Numerical Type
- Current setting range for over current relay  $0.5I_n-2.4I_n$
- Current setting range for earth fault relay  $0.05I_n-0.8I_n$
- I.D.M.T characteristics according to BS142 or IEC 60255 i.e. SI, VI, EI, LTI, including definite time for the high-set Elements.
- Time setting multiplier 0.05 - 1.0
- Broken conductor protection feature
- Negative sequence Protection Feature
- High-set Element for both over current and earth fault
- Protection, with a setting range of  $1-30I_n$ .
- Thermal Protection
- Dedicated Breaker Fail Protection.
- Circuit Breaker Maintenance
- Fault records, Event Records and disturbance records.
- Configurable output relays with ability to output starting elements to control Tripping of other upstream Protection relays.
- Drop off /pickup ratio  $>90\%$
- Low transient overreach  $< 10\%$

(iii) Restricted Earth Fault Relay

Should incorporate the following Features;

- Ratings: AC Inputs: 1Amp
- Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).
- Relay must be of Numerical type
- Relay should reject harmonics produced by C.T saturation
- The offer should include the associated stabilising resistor and voltage dependent resistor (metrosil)
- Current setting range  $0.05-0.8I_n$
- Operating time  $< 25ms$  at 5 times the setting

Restricted earth fault and differential protection functions shall be provided in separate units.

#### **4.1.2.6.2.3 Transformer Protection 66/11kV & 33/11 kV Transformers (LV side)**

The protection shall be as follows:

- (i) Three phase over current and earth fault relay
- (ii) Three phase directional over current and earth fault relay
- (iii) LV Master trip relay
- (iv) Trip circuit supervision relay that is visible from front of panel without opening relay compartment door.

The characteristics of these relays shall be as above.

#### **4.1.2.6.2.4 33kV & 11kV Feeder Protection**

The functions below can be combined in one unit. The characteristics are as above.

- (i) Feeder protection relay to include the following protection functions
  - Three phase over current and earth fault
  - Sensitive earth fault
  - Autoreclose function
- (ii) Auxiliary relay to indicate/lockout circuit breaker for low SF6 gas pressure
- (iii) Trip circuit supervision relay that is visible from front of panel without having to open any panel compartment door.
- (iv) Front panel mounted Autoreclose IN/OUT switch
- (v) Front panel mounted Sensitive Earth Fault (SEF) isolation switch

#### **4.1.2.6.2.5 Under Frequency Relay**

Each busbar shall be equipped with a separate under frequency relay for load shedding of all outgoing feeders. Each feeder trip circuit from the under frequency relay shall be equipped with a clearly marked isolating link.

The relay shall be numeric having two independently time delayed settings in the range 50-47Hz with a resolution of 0.1 Hz.

#### **4.1.2.6.2.6 Busbar Protection - 66 kV and above.**

Busbar protection schemes shall be provided at busbars for voltages 66 kV and above. Low impedance schemes will be acceptable provided full busbar protection coverage to include single phase and phase to phase faults can be achieved. The type of tripping criteria has to be fully described and preference will be given to systems with more than two criteria checks before tripping. The busbar protection relays must be of the numeric type with full discrimination between the busbars even with closed bus coupler. It shall have CT supervision,

#### **4.1.2.6.2.7 Breaker Backup Protection**

The breaker backup protection shall only isolate the busbar to which the faulty breaker is connected. I.e. the station shall, as far as possible, remain in operation after a breaker failure. The busbar protection can be used for selection of breakers to be tripped.

#### **4.1.2.6.2.8 Bus Coupler. Bypass Trip Logic.**

Where bus coupler is specified or already installed, the trip signals of any by passed circuit breaker shall be instantaneously transferred to the bus coupler.

Electrical interlocks shall be provided to ensure that only one circuit can be put on bypass at any one time. This is only possible through the reserve busbar.

The bus coupler protection shall in addition to possible bypass consist of a 3-pole IDMTL overcurrent relay and one IDMTL earth fault relay, all with standard inverse characteristics as well as breaker failure back-up protection.

#### **4.1.2.6.9 Synchronizing Equipment**

Circuit breakers and the secondary side transformer circuit breakers at 66 kV and above shall have synchronism check equipment (controlled closure).

Closure of the circuit breaker shall only be possible when the phase angle, slip and voltage difference between the measured voltages are within preset ranges. Permitted phase angle difference shall be adjustable in the range of 5 to 100 degrees, the slip shall be adjustable in the range of 0.05 to 0.5% and the voltage difference shall be adjustable from 2 to 20%.

#### **4.1.2.6.10 Relay Test Equipment**

The relay test equipment shall be a portable three phase unit with facilities for testing of impedance relays, over current relays, negative sequence relays, differential relays, earth fault relays both directional and non-directional as well as auto reclosing equipment. All sources of test units shall be integrated in the unit Digital display for volt and amps shall have 1% accuracy whereas the digital timer shall have a resolution not less than 1 ms. It shall be possible to connect the unit to a personal computer and necessary software for data recording and data handling shall be included.

#### **4.1.2.6.11 Relay Settings**

The Contractor based on network and equipment requirements shall provide the protection setting.

The Contractor, prior to making all commissioning tests, shall apply the settings to the equipment.

#### **4.1.2.7 Metering**

All metering equipment shall meet the requirements in IEC 60687 and IEC 61036.

Meters shall be designed for 110 V $\pm$  15/25 %, 50 (47-53) Hz and 1 A secondary voltage/current from measuring transformers. Auxiliary supply for the meters shall be 110 V, 50 Hz from the voltage transformers, or 110 V DC from the DC supply system.

#### **4.1.2.7.1 Meters of Outgoing 33kV and 11kV lines**

Electronic meters for active power, reactive power (Wh and VARh) and data recording units shall be provided for each outgoing feeder for registration of power irrespective of the direction of power flow. The Whr meters and recorders shall be of class 0.5 and class 0.5 for the VARh. The scale on the different type of instruments shall be proposed by the Contractor and be subject to approval by the Project Manager. The meters shall be able to communicate with the control system with pulses and on an IEC 61850 protocol.

#### **4.1.2.8 LV cables and Cable Racks**

##### **4.1.2.8.1 General**

This chapter covers the technical requirements of the external cables and appurtenance, cable laying, supply and erection of cable racks, etc., for all installations described under these Specifications except for the cables included in Domestic Installations (light, small power, etc.), which is described under Civil Works.

The supply and installation of the internal cables between the various parts of equipment shall be included in the Chapter in which the relevant equipment is specified.

The cable trenches including trench covers as well as conduits and cable racks shall be furnished and installed by the Contractor. Other necessary materials and equipment for laying, fixing, terminating, etc. of the cables shall also be provided by the Contractor.

For calculation of the length of cables, cable racks, etc., the Bidder shall use the measurements computed from the Drawings. No alteration in the lump sum prices shall be made due to possible rearrangement of any installation, changes in the building constructions, or any other reason, which may influence the quantity of cables and appurtenances to be supplied.

If, however, a considerable change in location of a switchyard should be made, the price shall be reduced or increased proportionally to the amount of reduction or increase in the distance between the switchyard and the control building. No price adjustment shall be made for deviations of less than 25 metres.

The cables shall be delivered in full lengths, and consequently no joints are permitted. All accessories shall be provided, such as potheads, galvanised and painted steel supports, clamps, etc.

##### **4.1.2.8.2 Technical Requirements - Cables**

The design, manufacture, rating and testing of all cables shall comply with the provisions and requirements of the applicable IEC recommendations, supplemented by recognised national standards if necessary.

40 °C maximum design ambient temperature shall be applied for all cables internally in the switchyard, between the switchyard equipment and the control building and inside the control building.

All cables shall be of termite proof design, e.g. by brass tape or equal approved techniques.

Wherever the risk of inductively transferred disturbances during abnormal (short-circuit, earth fault) conditions as well as during normal conditions exists, the cables shall be screened.

In order to have a minimum number of types of cables, all cables shall be standardised as much as possible as regards cross-sections, number of cores and marking of cores.

The phase colour identification code to be applied shall be made known to the Contractor shortly after the award of the Contract.

For the three-phase low-voltage system, four wire grounded neutral system shall be used.

The low voltage power cables (AC and DC) and all cables for control, measuring, etc., shall be PVC insulated and PVC-sheathed with an earthed concentric copper screen. The conductors shall be of electrolytic copper.

All cables shall be steel armoured.

Further requirements are stated in General Specification of Works, "Wiring and Terminal Blocks".

#### **4.1.2.8.3 Cable Laying**

The main guidelines and general requirements for the cable laying are stated in General Specification of Works, Cable Laying and Routing.

Medium-voltage, low-voltage power cables and control and measuring cables shall be segregated from each other throughout the plant.

The cables shall be laid in an orderly manner and crossings in the same plane shall be avoided.

All cables shall be laid on cable racks where they are not running in cable ducts or trenches, or in protecting tubes.

The cable racks shall be designed to allow the laying of the cable from the side(s) without pulling through. All racks and fixing devices shall be hot-dip galvanised.

The Contractor shall supply trenches and conduits of concrete.

The last section of a cable on the switchyard may be laid in a conduit or a pipe, they shall be laid in such a way that cables easily can be exchanged without digging.

#### **4.1.2.8.4 Diagrams and Calculations**

The Contractor shall deliver cabling plans and diagrams showing each cable connection.

Drawings for the cable racks, fixing features, etc., shall also be provided by the Contractor.

All dimensioning calculations shall be submitted to the Project Manager for approval.

The Bidder shall in his Bid give detailed information about the different types of cables proposed.

#### **4.1.2.8.5 Tests**

Factory tests and site tests shall be performed in accordance with the applicable IEC recommendation.

Type test certificates shall be submitted on request.

#### **4.1.2.9 Earthing (Grounding) System**

##### **4.1.2.9.1 General**

This chapter covers technical requirements of the earth electrode systems and the earthing conductors for the connection of metallic parts, of lightning arresters and of the system

neutrals, designed to protect persons and material and to allow for the correct service, operation and maintenance of the installations.

The substation earthing system shall be designed principally according to ANSI/IEEE 80 - 1986 Guide to Safety in AC Substation Grounding.

The earthing system shall consist of the earth electrode system in the ground under the switchyard, and of the earthing conductors, over-ground and in the buildings.

The Contractor shall design the complete earthing system. He shall measure and verify the specific earth resistance at all places where earthing electrodes will possibly be buried, he shall make drawings of the earthing electrode grids, calculate the resulting earth electrode resistance, and supply all information about the planned earthing electrode systems. He shall also make drawings of the earthing conductors, over ground and in the buildings and make the necessary calculations for the dimensioning of the earthing conductor systems. All the above shall be submitted to the Project Manager for approval.

For Biding purposes the earth resistivity shall be taken as 2500 ohm-metres.

The contractor shall be responsible for providing and installing the underground earthing system of the switchyard and for the connecting of all related equipment to this earthing system and shall furnish all required materials for this purpose. The earthing system shall earth operational electric systems of any type and voltage such as transformer neutrals, lightning arresters, secondaries of instrument transformers, etc.

Moreover, the Contractor shall take the necessary measures and furnish the required material for the safe earthing of:

- All steel structures, metal parts and overhead ground wires of the switchyard.
- All fences of the station, whereby for outer fences special care shall be taken to avoid injurious step and touch voltages for personnel standing outside and inside these fences.
- All metal parts, even if these do not constitute a conducting part of an electric system of the plants, such as machinery, operating desks, piping, sewers, rails, metal tanks, lighting, fixtures, cable racks, etc.
- All operational electric systems such as power and instrument transformers, lightning arresters etc.

All connections between equipment and the earthing network shall be exposed (not embedded) and easily accessible for checking of the transition points. Bare conductors, as part of the earthing system, embedded directly in the concrete will not be accepted. Similarly, bolted connection of metallic constructions, do not form an acceptable earthing connection.

The layout drawings, the detailed calculations for the earthing system and the relevant data, which the Contractor will use as basis for his design, shall be submitted to the Project Manager for approval. The Contractor shall also be responsible for performing all measurements and final checking of the whole of the earthing system.

Further requirements related to the earthing system are specified in Particular Specifications.

#### **4.1.2.9.2 Technical Requirements, General**

The earthing system shall be constructed and installed to comply with the requirements of local regulations and of the applicable Standards.

More specifically and independent of (or in addition to) the regulations and standards, the earthing system shall provide:

- Adequate protection for personnel against dangerous voltages, currents and arcs
- Safe touch voltages and step voltages
- A low earthing impedance for the lightning arresters
- A low earthing impedance for the transformer neutrals and a sufficiently low neutral conductor impedance
- Limitation of the induced, or capacitive transformed voltages on low voltage, low current and electronic cables, circuits, panels and other equipment.
- That short circuit, earth fault and double earth faults currents will flow through the earthing systems and not through other conducting parts or building constructions to a hazardous extent.

The maximum resistance of the earth electrode grid in the switchyard and under the control building shall be 0.5 ohm during the dry period. In addition, the earth electrode system as well as all other earthing systems shall be designed and constructed for the operating voltages, the design short circuit capacities and the corresponding short circuit and earth fault currents which are specified in General Specification of Works, and in the other Sections of these Specifications for the respective voltage systems.

The overall resistance between the earthing grid system and the surrounding soil shall be in the range between 10 and 20 ohms. If necessary, additional earthing rods shall be applied to achieve the specified value.

The dimensioning shall be co-ordinated with the relay protection scheme of the various parts of the plant. In any case, however, the earthing conductors shall be dimensioned for carrying the earth fault current and double earth fault currents of the various parts of the plant for at least 1 (one) second without any harm to the conductors or connections.

The conductors shall be reliably protected against mechanical damage and corrosion.

Buried connection shall be made by compressed clamps or by approved welding process. No bolted clamps may be used under ground surface. Connections above earth shall be screwed and shall be easily accessible for control. All connections shall be protected against corrosion.

#### **4.1.2.9.3 Earthing Electrode System Under the Control Building**

The conductors shall be of electrolytic copper with dimensions at least 30 x 3 mm for flat bar or at least 95mm<sup>2</sup> stranded wire. Copper-weld with approximately the same conductivity may be used.

Risers shall be copper stranded wire at least 95 mm<sup>2</sup>.

The conductors shall be placed on the ground after the excavation is completed and just before the concreting starts. Care must be taken that the earth wire is in good contact with the soil and preferably embedded into it.

Under the building the grid of conductors shall be placed with an average distance between conductors of not more than 10 m. At all crossings the conductors shall be interconnected by brazing or welding. The grid shall also be connected to the concrete reinforcement at several



places as well as to the earthing grid of the switchyard area. Vertical risers shall be brazed or welded to the conductors.

The risers shall be placed in the concrete shuttering, and led out of the shuttering at appropriate places approximately 30 cm above the floors. Care shall be taken to protect the risers against damage during shuttering and concreting.

Connecting terminals for the screwed connections between the risers and the above-floor main earthing conductors shall be placed at easily accessible places and protected against mechanical damage.

The above information describes the minimum requirements. The final design and construction for the achievement of the total requirements of the earthing systems shall be made by the Contractor.

#### **4.1.2.9.4 Earthing Electrode System of the Switchyard**

The conductors shall be of electrolytic copper with dimensions at least 30 x 3 mm for the flat bar or at least 95 mm<sup>2</sup> stranded wire. Copper-weld with approximately the same conductivity may be used.

The risers shall be of at least 95 mm<sup>2</sup> stranded copper wire or equivalent copper-weld.

The conductors shall be placed forming a grid covering the whole switchyard area. The average distance between the conductors shall not be more than 20 m.

A conductor shall also be placed outside the fence along the whole length of the fence at a distance and at a depth suitable for the potential gradation needed to avoid dangerous touch voltage between the fence and the ground.

Trenches for the earthing grid shall be excavated in the ground to reach soil of good conductivity and a layer of at least 25 cm of the same material shall be placed over the conductor. The conductor shall at no place be less than 80 cm below the ground level.

Where advantageous for achieving low resistance to ground, vertical copper-weld earthing rods may also be used, in addition to the horizontal grid.

Connecting terminals for the screwed connections between the risers and the on-ground earthing conductors shall be placed in easily accessible locations.

The above information describes the minimum requirements. The final design and construction for the achievement of the total requirements of the earthing system shall be made by the Contractor.

#### **4.1.2.9.5 Earthing Conductors**

In the control building a main earthing bus shall be installed on each floor in the cable trenches.

The conductors for these main earthing buses shall be of electrolytic copper with dimensions of at least 150 mm<sup>2</sup> for flat bar or stranded conductor.

All the risers from the earthing electrode systems shall be connected to these main buses by disconnecting screw connections. At appropriate places at the end of the buses they shall be interconnected, thus to the greatest extent forming interconnected grids or loops.

Branch-offs to switchgear, panels and other parts, which shall be earthed, shall be of electrolytic copper with adequate dimensions for each item to be earthed.

Each item shall be directly connected to an earthing conductor and not through a series connection of other metallic parts.

Where rows of switchgear cubicles, boards and panels occur, each cubicle, board or panel shall be earthed individually.

The fence of the switchyard shall be earthed at distances of not more than 20 m.

Earthing conductors for low current and electronic systems shall be insulated and shall be run from the systems, panels, etc., directly to a main earthing bus close to a connection to the earthing electrode system, These earthing conductors shall not be mixed with the earthing of the high power systems.

Earthing switches and lightning arresters shall have a riser directly connected to the current carrying part in addition to a riser connected to the structure. All outdoor earthing conductors shall be insulated with spacers or conduits against contact with galvanised steel structures.

#### **4.1.2.10 Site and Commissioning Tests**

##### **4.1.2.10.1 General**

Tests as described below shall be used as a guideline and may be changed or varied after written agreement from the Project Manager, due to changes of design manufacturing of construction techniques.

##### **4.1.2.10.2 Test of Wiring**

- a. Insulation Resistance Test at 2.5 kV a.c. for one minute shall be carried out on all A.C and DC. Protection, control, alarm and indication circuit to ensure that wiring is in satisfactory condition. Ocular inspection shall be made on cable glands, cable jointing, fuse or circuit breaker ratings and small panel items, such as indicating lamps.
- b. Static equipment which may be damaged by the application of test voltages shall have the appropriate terminals disconnected.
- c. Inter-relay, inter-unit and cubicle wiring carried out at site is to be checked to the appropriate circuit and/or wiring diagram. This may be done by using bells or buzzers. D.C. supplied from the station battery may also be used. Where it is found necessary during re-commissioning work to effect site modification to the secondary wiring, site copies of the appropriate schematic and wiring diagrams shall be suitably marked as agreed with the Project Manager before the circuit is commissioned.
- d. Loop resistance measurements are to be done and on all current transformer circuits. Separate values are required for current transformer and lead resistances and all measurements are to be recorded on lead resistance diagrams.
- e. Pilot cable impedance and phase angle measurements shall be made when pilot cable is to be used with unit type protection. The Contractor providing the pilot cables shall measure these values.

#### **4.1.2.10.3 Test of Relays**

- a. All relays are to be examined to ensure that they are in proper working conditions and correctly adjusted, correctly labelled and that the relay case, cover, glass and gaskets are in good order.
- a. Secondary injection shall be carried out on all a.c. relays, using voltage and current of sinusoidal waveform and rated power frequency. For circulating current protection employing high impedance voltage setting test shall be across the relay and stabilising resistance. The operation setting for the type of protection is to be established by secondary injection, where it is not possible to ascertain this value.

#### **4.1.2.10.4 Test of DC. Circuits**

Tests are to be carried out to prove the correctness of all DC. polarities, the operating levels of DC. relays and the correct functioning of DC. relay schemes, selection and control switching, indications and alarm.

#### **4.1.2.10.5 Test of Instruments**

Instruments and instrument transformer circuits shall be checked for polarity of direction and for calibration including any interposing transformers or transducers. These checks shall be made on all current transformer ratios where applicable.

#### **4.1.2.10.6 Tests on Conductors, Insulators and Accessories**

None required.

#### **4.1.2.10.7 Tests on the Switchyard on Site**

All electrical equipment and installations shall be tested for correct connections of the high-voltage circuits and shall be subjected to a complete operation test to check the correct operation thereof in terms of the operational requirements specified in these specifications.

The resistance to earth of the earthing system of the switchyard shall be measured. The earthing systems shall be checked for conductivity and reliable connections.

#### **4.1.2.10.8 On Load Test**

On load tests are required, but due to the hazards inherent they shall be carried out under the direct supervision of the Project Manager and/or the Employer. The following tests are required:

- a. an operation and stability test shall be carried out for on-load commissioning.
- b. test for restraint shall be carried out to prove the characteristic of protective and measuring systems with directional characteristics.
- c. on-load checks shall be made after the protective gear has been placed in service to ensure that all connections and test links have been replaced and test leads removed, as well as to confirm the integrity of the current transformer circuits. Where necessary, voltage readings shall be taken at the terminals on each relay to ensure that loop connections between the relays are complete. Special attention shall be paid to broken delta voltages and residual current circuits were zero voltage or current respectively may not be proof of the completeness of the circuit.

**SECTION VI**  
**PARTICULAR SPECIFICATION**  
**TRANSFORMERS**

---

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>4.1.3 PARTICULAR TECHNICAL SPECIFICATIONS-TRANSFORMERS</b> ..... | <b>50</b> |
| 4.1.3.1 General.....  | 50        |
| 4.1.3.2 Power Transformers .....                                    | 50        |
| 4.1.3.2.1 Design Criteria.....                                      | 50        |
| 4.1.3.2.2 Construction .....  | 52        |
| 4.1.3.2.3 Painting and Galvanising.....                             | 57        |
| 4.1.3.2.4 Fittings.....   | 57        |
| 4.1.3.2.5 Cooling .....   | 59        |
| 4.1.3.2.6 Off-load Tap Changer.....                                 | 61        |
| 4.1.3.2.7 Drain, Filter and Sampling Valves .....                   | 61        |
| 4.1.3.2.8 Oil.....  | 62        |
| 4.1.3.2.9 On-Load Tap Changers.....                                 | 62        |
| 4.1.3.2.10 Local Control Cubicles and Wiring Cabinets .....         | 65        |
| 4.1.3.2.11 Wiring and Terminal Blocks.....                          | 65        |
| 4.1.3.2.12 Manufacturing, Inspections and Tests.....                | 66        |
| 4.1.3.2.13 Erection .....   | 67        |
| 4.1.3.2.14 Delivery and Transport .....                             | 68        |
| 4.1.3.2.15 Evaluation of Losses .....                               | 68        |
| 4.1.3.2.16 Drawings to be submitted with Bid.....                   | 69        |
| 4.1.3.3 Distribution and Auxiliary Transformers .....               | 71        |
| 4.1.3.3.1 General .....   | 71        |
| 4.1.3.3.2 General Design .....                                      | 71        |
| 4.1.3.3.3 Tanks and Conservators .....                              | 73        |
| 4.1.3.3.4 Tests .....   | 77        |
| 4.1.3.3.5 Packing and Transport .....                               | 77        |
| 4.1.3.3.6 Drawings and Diagrams .....                               | 77        |
| 4.1.3.3.7 Evaluation of Losses .....                                | 78        |

### 4.1.3 PARTICULAR TECHNICAL SPECIFICATIONS-TRANSFORMERS

#### 4.1.3.1 General

This Specification provides for the manufacture, supply, testing before shipment, delivery, erection and commissioning of the transformers detailed in Scope of Works. Particular reference is also made to General Specification, General Technical Specification, Project Specific Data and IEC 60076.

The transformer shall be designed for a 40 years lifetime under full load operation and be supplied together with all ancillary equipment for a complete installation.

All connections and contacts shall be of ample section and surface for carrying continuously **120 %** of the specified current without undue heating. Fixed connection shall be secured by bolts or set screws of ample size, adequately locked. Lock nuts shall be used on stud connections carrying current.

On outdoor equipment, all bolts nuts and washers in contact with non-ferrous parts that carry current shall be of phosphor bronze.

Wherever possible, bolts shall be fitted in such a manner that in the event of the nut working loose and falling off, the bolts will remain in position.

#### 4.1.3.2 Power Transformers

##### 4.1.3.2.1 Design Criteria

###### 4.1.3.2.1.1 Service Conditions

The transformer shall be capable of operating continuously outdoors at any tapping during the ambient conditions specified in the section: "Project Specific Data"

Note that the average maximum ambient temperature in any one day is 30 °C. The maximum temperature rise shall therefore not exceed 55 °C of the top oil and 60 °C of the winding above the maximum ambient temperature of 40 °C.

For temperature correction due to attitude reference is made to IEC 60076 which limits the temperature rise further when tested at normal altitude. The altitude used in the calculations shall be 2 200 masl.

###### 4.1.3.2.1.2 Rating

The transformers shall comply with the ratings specified in Scope of Works under the stated service conditions without exceeding the temperature rise limits specified above, over the complete tapping range. If the voltage on the secondary (LV) side is reduced or raised by up to 5 % from the rated voltage, the temperature rises of any part shall not rise by more than 5 °C (at rated power on any primary tapping).

###### 4.1.3.2.1.3 Tapping

All tapplings shall be designed for constant kVA output, the rated voltage of each winding of the transformer on the principal tapping shall be as specified in Scope of Works and unless otherwise specified, shall correspond to the system nominal voltage. The tapping ranges shall be as specified in Scope of Works.

*4.1.3.2.1.4 Noise*

The transformer, tap-changing equipment and supplementary cooling equipment shall operate without undue noise and every care shall be taken in the design and manufacture to reduce noise to the level of that obtained in good modern practice. The noise level of the transformer shall not exceed 78 dB(A) when tested in accordance with IEC 60076.

*4.1.3.2.1.5 Radio Interference*

The design of the transformer shall be such that they will not cause any objectionable interference with radio reception in the vicinity of the transformer, either by direct radiation or by transmission through the power-lines and system to which the transformer may be connected, when energising at full rated voltage and when delivering any load up to the continuous maximum rating.

*4.1.3.2.1.6 Interchangeability and Parallel Operation*

All transformer of any one type shall be identical and interchangeable with one another. No alteration to control circuits shall be permissible for this purpose except by means of built-in terminal boards fitted with links for effecting the alteration. All parts are to be made accurately to dimensions so that any corresponding parts will be interchangeable and any spare parts will fit into place without need of adjustments. Where similar equipment has previously been supplied, components shall interchange with those on previous contracts, unless otherwise approved.

The transformer shall be suitable for parallel master-follower operation with each other and with previously supplied transformer of similar rating which shall remain in service on the substations covered by this contract, both in respect of transformer characteristics and control circuits on all relevant taps. The new and old transformers shall share the load subject to the tolerances of impedance and voltage laid down in, IEC 60076.

*4.1.3.2.1.7 Insulation Levels*

When assembled complete with connections as in service, electrical clearances in air shall be adequate to withstand the required impulse withstand voltage given in Project Specific Data. The Bidder shall propose in his Bid details of bushings with drawings showing air clearances and creepage distances. The creepage distance shall not be less than 31 mm/kV line voltage in Coast and industrial area and 25 mm/kV for inland installations. Care shall be taken to ensure that no fittings are located so as to interfere with the external connections to the bushing terminals.

The insulation test levels are given in Project Specific Data. All transformers shall be designed for full insulation on all terminations also the neutral termination.

*4.1.3.2.1.8 Short Circuit Performance*

The transformer shall be capable of withstanding, without damage, the effects of a symmetrical three-phase short circuit and a phase to earth short circuit under conditions specified in IEC 60076.

It can be assumed that during a short circuit, nominal voltage will be maintained on one side of the transformer with a short on the other, the external impedance being zero. It can also be assumed that up to four transformers may be connected in parallel between HV and LV busbars.

*4.1.3.2.1.9 Frequency*

The normal frequency will be 50 cycles per second. The transformer shall, however, be suitable for continuous operation with frequency variation of plus or minus 2.5 % from the normal, without exceeding the temperature rise limit specified.

#### 4.1.3.2.1.10 Flux Density

The maximum flux density in any magnetic component under any condition of voltage and frequency specified under all the operating conditions given in this specifications shall not exceed 1.9 Tesla.

#### 4.1.3.2.2 Construction

##### 4.1.3.2.2.1 General

Transformers shall be of the oil immersed "core" type (i.e. not "shell" type) suitable for outdoor use, they shall be dried out at the manufacturers works and it should be possible to commission them without further dry out.

Designs shall be such that water does not collect on any of the equipment. Particular attention shall be paid in the design of all equipment to ensure that there is not damage to working parts or insulation through the ingress of dust, insects or vermin which are prevalent for long periods in the year.

##### 4.1.3.2.2.2 Cores

The transformer core shall be built up of laminations of the best quality non-ageing cold-rolled grain oriented silicon sheet steel of high permeability and low loss coefficient. All joints between laminations shall be of the interleaved type and the laminations shall be clamped securely. Bolting of the core should be avoided to reduce losses. On no account shall butt joints be offered. The cross-section of the core shall form an approximate circle.

The laminations shall be separated by hot-oil proof insulation, and the clamping of the frame shall be firm to ensure even pressure over the whole of the core laminations so as to prevent undue vibrations or noises.

The core sheets shall be insulated with high-grade oil-proof insulation, for example magnesium-silicate-phosphate. Paper will not be accepted.

The core clamping arrangement and framework shall be efficiently insulated from the cores and withstand a test voltage of 2 kV, 50 HZ during 1 minute. The core shall be designed and built up in such a manner as to avoid accidental or slow development of short circuit paths through the iron and framework.

The core, framework, clamping arrangements and general structure of the transformer shall be of robust design, capable of withstanding any shock to which they may be subjected during transport, installation or service.

Suitable axial cooling ducts shall be provided to ensure free circulation of oil and efficient cooling of the core. The ducts shall be proportioned so that the maximum temperature at any point will be within the prescribed limits of temperature rise.

Lifting lugs or other similar means shall be provided for conveniently lifting the complete assembly (with windings).

Provision shall be made for efficient arrangement of guides to prevent movement of the core and windings during transport, installation or service.



The framework of the core shall be so designed as to prevent the presence of oil pockets, which would prevent complete emptying of the oil from the tank through the drain valve.

#### 4.1.3.2.2.3 *Windings*

The windings shall be circular and consist of high quality rectangular section copper, wound with age resisting paper of high dielectric strength. The current densities in the windings shall be stated in the Bid.

The amount of insulation between turns shall be determined not merely by normal volts per turn, but also by due consideration of the line voltages and the service conditions, under heavy lightning storms.

Adequate insulation and clearances between the windings shall be provided and all insulation and clearance between live parts must be adequate for operation at 5 per cent over the highest tap voltages on all the windings.

The insulation of the end turns of each winding adjacent to the transformer terminals shall be reinforced between turns to protect the windings satisfactorily against surges and transients. Details of the reinforcements shall be given in the Bid.

None of the materials used shall shrink, disintegrate, carbonise or become brittle under the action of hot oil, to an extent lowering the lifetime below 40 years when the transformer is operated continuously at the maximum specified loading.

The windings shall be so placed that they remain electrostatically balanced with their magnetic centres coincident under all conditions of operation. To prevent excessive static voltage, static end rings shall be provided, wherever necessary, at the live end of the windings.

The windings, connections and trappings of the transformer shall be clamped in position and braced so as to withstand shocks or undue stresses during transport, short circuit conditions, and other transient causes. No mechanical movement of the coils should be possible with dead short circuit on the transformers.

All windings and all fibrous and hygroscopic materials used in the construction of the transformer, shall be dried under vacuum and impregnated with hot oil. Full details of the drying out and vacuum treatment shall be furnished by the Bidder.

Leads from windings to terminal board and bushings shall be rigidly supported to prevent damage from vibration and short circuit forces.

Adequate provision shall be made for the circulation of oil round and between the winding so that a low temperature gradient between the conductors and the oil is assured and any danger of excessive local heating is avoided.

The finished width of any duct and clamping arrangement shall be such as not to impede the free circulation of oil through the ducts.

It is essential that the windings shall be subjected to a thorough shrinking and seasoning process, so that no further shrinking of windings occur at site. However, clamping arrangement shall be provided for taking up any possible shrinking of coils when in service.

All similar coils shall be strictly interchangeable. Full detailed description of the windings shall be submitted with the Bid.

When specified in Scope of Works, stabilising windings shall be provided. The windings shall be capable of withstanding the forces to which they are subjected under all conditions, particularly the forces due to a short circuit between terminals or between any terminal and earth with full voltage maintained on all other windings intended for connection to external sources of supply. When stabilising windings are to be used for purposes other than decreasing zero sequence impedance, this will be declared in the scope of work and the windings must be designed accordingly.

Unless otherwise specified, only one terminal of the stabilising winding shall be brought outside the tank and a suitable bushing shall be provided for this purpose through the tank cover. When used additionally for an auxiliary supply each corner of the winding shall be brought out.

It shall be possible to earth the winding externally to the main tank by means of a flexible bolted link to be provided by the supplier between the terminal and a suitable pad on the tank cover.

The neutral points of star connected windings shall unless otherwise specified in Scope of Works be brought out to bushings located on the tank cover and connected to an earthing bus attached to the main transformer earth terminal.

Where the star point of a winding is not specified to be brought out through a neutral bushing, the connection shall, nevertheless, be available under the main tank cover plate to permit the subsequent fitting of a neutral bushing. The subsequent installation of this bushing shall not necessitate any alteration to, or repositioning of existing fittings.

#### 4.1.3.2.2.4 *Internal Earthing*

Each part of the core shall be electrically earthed to the transformer tank. The internal earth connection shall be of the detachable link type and shall be located in an accessible position.

The magnetic circuit shall be earthed to the clamping structure at one point only through a removable link placed in an accessible position beneath an inspection opening in the tank cover. The connection to the link shall be on the same side of the core as the main earth connection and be taken from the extreme edge of the top yoke. The main core clamping structure shall be connected to the tank body

Magnetic circuits having an insulated sectional construction shall be provided with a separate link for each individual section and the arrangement of the connections shall be to approval.

Where oil ducts or insulation parallel to the plane of the laminations divide the magnetic circuit into two or more electrically separate parts, the ducts or barriers shall be bridged and the magnetic circuit shall not be regarded as being of sectional construction.

Where coil clamping rings are of metal, each ring shall be connected to the adjacent core clamping structure on the same side of the transformer as the main earth connection.

All earthing connections, with the exception of those from the individual coil clamping rings, shall have a cross-sectional area of not less than 90 mm<sup>2</sup>.

Connections inserted between laminations may have the cross-sectional area reduced to 25 mm<sup>2</sup> where in close thermal contact with the core.

#### 4.1.3.2.2.5 *Transformer Tank*

Each transformer shall be enclosed in a steel tank of welded construction, suitably stiffened by means of channel or angle sections welded to the tank, for withstanding the stresses imposed during transit to site and subsequent operation with no signs of oil leakage. The transformer tank shall have a removable lid on top, i.e. "Bell" type transformer tanks are not permitted.

The tank shall be complete with all accessories and shall be designed to allow the complete transformer (tanked and filled with oil) to be lifted by crane or jacks, transported by road, rail and water without overstraining any joints and without causing subsequent leakage of oil. Corrugated tanks are not acceptable.

The tanks must be so constructed as to be capable of withstanding an internal positive pressure of not less than 70 kPa without any permanent deflection of any parts. The tank must also be capable of withstanding a vacuum of 50 mm of mercury absolute when emptied of oil.

Guides shall be provided inside the tank to facilitate the lowering into the tank of the core and coils and their raising and correct positioning. The guides shall extend from the bottom of the tank to within 150 mm of the top of the tank.

The tank covers shall be of adequate strength and shall not be distorted when lifted in the lifting eyes to be provided. Inspection openings/manholes suitably bolted shall be provided as necessary to give easy access to bushings, tap changer connections and earth connections. Each inspection opening shall be of ample size for the purpose for which it is provided. Covers for such openings shall not weigh more than 25 kg and shall be provided with lifting eyes.

A rail for connection of safety belt shall be arranged on the tank cover.

All oil-pipe connections shall have flanged joints provided with gaskets, preferable set in grooves or held in position by stops to prevent over compression of the gaskets.

Four jacking lugs shall be fitted 500 mm above ground level and four holes with a diameter of not less than 50,8 mm shall be provided on the jacking lugs in order to permit the transformer to be slewed in any direction.

The base of the tank shall be reinforced and so designed that it shall be possible to move the complete transformer unit in any direction without injury when using rollers, plates or rails. A design which necessitates rails being placed in a particular position shall not be used.

Wheels, where specified, shall be plain, flanged uni-directional or bi-directional, whichever is specified in Scope of Works. Bi-directional wheels shall be designed so that it is possible to change the direction of the wheels without removing them from the transformer, and provision shall be made for locking the wheels parallel or at right angles to the major axis. Grease nipples or cups shall be provided for lubricating the swivel bearings and the wheel bearings. The Employer will provide the wheel gauge.

Lifting lugs shall be fitted capable of lifting the transformer complete with windings and filled with oil.

The tank cover shall be fitted with pockets for a thermometer and for the bulbs of the winding temperature and oil temperature indicators specified. Protection shall be provided when necessary for each capillary tube. The thermometer pocket shall be fitted with a captive screwed cap to prevent ingress of water. The pockets shall be located in the position of maximum oil temperature and it shall be possible to remove the instrument bulbs without lowering the oil in the tank.

The tank and cooling equipment shall be designed to permit vacuum treatment on site. The maximum safe permissible vacuum (millimetres of mercury) which may be applied above oil level, to the tank, cooling equipment and to the conservator, without causing permanent distortion, shall be stated in the Bid.

Two earthing terminals located at opposite side of the tank, capable of carrying for 30 seconds the full lower voltage current of the transformer, shall be provided. Provision shall be made at positions close to each of the four bottom corners of the tank for bolting the earth terminals to the tank structure to suit local conditions.

#### 4.1.3.2.2.6 *Gaskets*

Oil-resisting synthetic rubber gaskets will be preferred. If cork or similar material is used oil-resisting synthetic rubber be applied as a bonding medium. The Contractor shall submit details of gasket material for approval.

Spare unused sets of gaskets shall be supplied for use on site for all positions where joints have to be made after transportation of the transformer.

#### 4.1.3.2.2.7 *Current Transformer*

Current transformer for winding temperature measurements shall be mounted inside the transformer on a bushing turret, and in the connection between winding and neutral point for auto-transformers.

Accuracy class 3 shall be used for temperature indication.

#### 4.1.3.2.2.8 *Current Transformers*

Current transformers as indicated in scope of works shall be mounted in the bushing turrets.

#### 4.1.3.2.2.9 *Bushings*

Bushings shall be fitted to the equipment as specified in Scope of Works. Bushings for 66 kV and above shall be of the condenser type. Other bushings may be of solid porcelain.

All terminals shall be marked to correspond with the markings on the diagram plate.

The transformer bushings shall withstand accidental arcing or flashover without seals or other vital parts becoming damaged. Stresses due to expansion and contraction in any part of the bushing shall not lead to development of bulges, hair-line cracks or other defects. Suitable connecting clamps shall be able to absorb shocks due to vibration of the connecting jumpers. The bushings shall withstand internal vacuum in the transformer tank.

All the bushings of any transformer shall have a rated current of at least 120% of the rated currents of the windings to which they are connected (in order not to limit over-loads).

#### **4.1.3.2.3 Painting and Galvanising**

Oil-filled transformer shall have their interior surfaces sandblasted and finished with two coats of anti-corrosive and oil-resistant priming paint. Exterior surfaces shall be sand-blasted and have two rust inhibiting priming coats and one intermediate coat with paint on zinc chromate or urethane alkyd basis or equivalent; one final coat of weather and oil resistant paint. Minimum total thickness 0.16 mm.

The radiator external surfaces shall be hot-dip galvanised with a zinc deposit on average not less than 400g/m<sup>2</sup>.

Outdoor control and marshalling boxes/cabinets shall have at least one prime coat and two layers of paint on zinc powder basis to be applied after perfect cleaning.

The particulars of priming and finishing paintings shall be stated in the Bid, with specifications of paint, together with a listing of colours available, for each of the plant and equipment.

The Employer is not bound to accept the finishing colour proposed by the Bidder. Determination of colour shall be at the option of the Employer and shall be finalised at the time of approval of drawings.

The exterior finish of outdoor control cabinets shall be in the same colour as that for the transformer.

Should any paint work be damaged during transit or erection, this shall be made good on site.

All interior and exterior surfaces, subject to corrosion, that cannot readily be painted, or where galvanising is explicitly specified, shall be hot-dip galvanised with an average thickness not less than 0.1 mm. Bolts and nuts associated with galvanised parts shall be hot-dip galvanised.

#### **4.1.3.2.4 Fittings**

The transformer shall be supplied with the fittings specified in Scope of Works. These fittings shall comply with the following clauses.

##### *4.1.3.2.4.1 Conservator*

The conservator shall be mounted on the main tank but not obstruct connection to overhead connection..

The conservator shall be fitted with a removable end on which shall be mounted the oil gauge. The conservator tank shall be mounted to slope lightly downwards towards the drain valve, which shall be adjacent to the removable end.

The pipe connecting the conservator to the tank shall extend at least 50 mm into the conservator and shall be brought out from the highest point of the main tank cover. A valve shall be provided immediately adjacent to the conservator. All pockets and bushing turrets of the main tank shall be connected into this pipe between the transformer and the Buchholz relay.

The conservator shall be so dimensioned that it will permit all expansion over the working range of temperatures from no load with the transformer cold and at -5 °C ambient air temperature to full load at 45 °C ambient air temperature while the sump pipe remains covered with oil and the oil level is visible or indicated. In any case, the volume of the conservator shall be at least 10% of the transformer oil volume.

The oil connections from the transformer tank to the conservator vessel shall be arranged at rising angle to the horizontal. The Buchholz relay (see Clause 4.6) shall be fitted in this pipe in such a position that inspection, testing and dismantling is possible with the transformer in operation. A step valve shall be provided between the conservator and the relay.

The conservator shall be equipped with the following fittings:

- a) A sump formed by extending the inlet pipe inside the conservator.
- b) A manhole formed by bolting one end-plate of the conservator.
- c) A drain valve with flanged plug.
- d) A flanged filling plug.
- e) An oil level gauge.
- f) A filter valve.

#### 4.1.3.2.4.2 *Dial-type Oil Gauges*

Dial-type oil gauges, where specified, shall be of the magnetically operated type, in which breaking of the gauge glass will not release any oil. The gauge shall be fitted with at least two circuit-closing, potential free, low-oil-level alarm contacts wired to the marshalling box.

#### 4.1.3.2.4.3 *Silica-Gel Breathers*

Each conservator shall be fitted with a silica-gel type dehydrating breather to approval. The breather shall be provided with an oil cup or other device which prevents contact between the dehydrating agent and the air outside the transformer. If an oil cup is provided, the oil should be visible from the outside and the lowest oil level should be marked.

The weight of the dehydrating agent shall be not less than 0,5 kg per 1500 litres of oil in the transformer and cooler.

Unless the silica-gel container is transparent the breathers shall have a window for inspection of the colour and condition of the silica-gel.

#### 4.1.3.2.4.4 *Explosion-Vents*

An over-pressure device of the spring release type or similar shall be used for pressure relief in case of explosion or sudden overpressure. The type shall be approved by the Project Manager. Separate oil compartments as OLTC compartment shall have separate explosion vents.

The explosion-vent shall be provided of sufficient size for the rapid release of any pressure which may be generated within the tank and which might result in damage to the equipment. The device if used shall be so placed that any discharge from it will not be deposited on any part of the transformer or its associated equipment.

#### 4.1.3.2.4.5 *Buchholz Relays*

Buchholz relays shall be of the double-float type with separate floats for alarm and shut-down at low and high speed gas development and shall be of approved manufacture suitable for operation in transformer oil as specified over the

temperature range -10 °C to 115 °C. The two contact sets shall not be exposed to oil and shall be wired to the marshalling box.

The relays must be interposed in the connecting pipe between the oil conservator and the transformer tank in such a manner that all gas from the tank must pass through the relay as it rises to the oil conservator.

Two copper pipes shall be connected to the two pet cocks on the relay and extended to position 1 m above ground level and fitted with stop cocks for sampling and testing purposes. The stop cocks are to be labelled and easily accessible and be clear of surrounding steel-work. The sight window of the relay shall be readily visible from ground level. Separate oil compartments shall have separate Buchholz relays. However the OLTC chamber shall be equipped with pressure rise relay instead.

#### 4.1.3.2.4.6 *Temperature Indicators*

The local temperature indicators shall be of the dial-type graded in °C with a manually resettable pointer to register the highest temperature reached. The local indicators shall be mounted on the transformer tank in a suitable weatherproof steel cabinet with a lockable door. The cabinet shall be so positioned as to allow easy access to and readability of the gauges.

Each transformer shall be provided with winding temperature indicators of the "thermal image" type compensated for changes in ambient temperature (one for each winding type: common, series, HV, LV and tertiary as appropriate). The indicator shall have a load - temperature characteristic approximately the same as the hottest part of the windings. The primary current transformer for operating the indicator shall be built into the main transformer tank on the bushings. Information shall be included in the maintenance instructions in the form of either a graph or table showing the relationship between current injected into the heater coil and the corresponding temperature reading.

The indicators shall be provided with two sets of alarm/trip contacts, adjustable to close at any temperature between 45 °C and 150 °C such adjustment being possible without dismantling the instrument. Where supplementary forced cooling is specified, two additional set of contacts shall be provided on the winding temperature indicators, for automatic start of the cooling fans in two stages. The differential between "switch on" and "switch off" temperatures must also be variable in the range 15 °C to 30 °C.

The instrument and set points shall have an accuracy of  $\pm 1\%$  of full scale deflection and the indicated temperature must reflect the hot spot temperature to within  $\pm 3$  °C under all operating conditions. Test links are to be provided for calibration purpose.

One temperature indicator of the capillary type for measurement of the top oil temperature shall be provided for each transformer.

#### 4.1.3.2.5 **Cooling**

##### 4.1.3.2.5.1 *Definition*

The types of cooling shall be designated by the IEC lettering symbols:

- a. Natural Air Circulation (ONAN)  
By radiators directly attached to the tank.

- b. Forced Air Circulation (ONAF)  
By fans cooling the radiators.

4.1.3.2.5.2 *Declaration of Ratings*

The Bidder shall declare in the Schedule of Technical Guarantees the rated power available under the operating conditions ONAN or ONAF (as required in Scope of Works) and the ratings shall be indicated on the rating plate.

4.1.3.2.5.3 *Radiators*

The transformers shall be fitted with detachable radiators (tube coolers are not accepted). Suitable valves, with blanking plates shall be provided at the inlet and outlet of each radiator so that it may be removed without draining oil from the tank. Inlet and outlet valve "OPEN" and "CLOSED" positions shall be clearly marked. The valves shall be readily accessible and easy to operate. Lifting facilities, a drain cock and an air release vent shall be provided on each radiator.

Radiators shall be hot dip galvanised and designed so that it is possible for the whole of the cooling surface to be cleaned. They shall also be designed so that they shall withstand dry-out vacuum without distortion or causing leakage of hot oil.

4.1.3.2.5.4 *Forced-Air Cooling ONAN/ONAF*

The forced-cooling equipment shall be designed to start automatically from winding-temperature relay control at predetermined temperatures recommended by the Contractor. The equipment shall be designed to start in 2 stages at preset temperatures.

Indicate setting values are as follows:

|         | On   | Off  |
|---------|------|------|
| Stage 1 | 65°C | 50°C |
| Stage 2 | 75°C | 60°C |

The cooler arrangement must allow for the maintenance or failure of any one fan or radiator without losing more than 20 % of the total cooling capacity.

All fans shall operate as a unit. Fan blades and fan ducting shall be of aluminium alloy, stainless steel, galvanised steel, or other corrosion-resistant metal and shall be designed to keep noise and vibration to a minimum. All fans shall be provided with galvanised wire-mesh guards. It shall be possible to remove fan assemblies complete without dismantling other equipment.

4.1.3.2.5.5 *Cooler Capacity*

The coolers and fans shall be so dimensioned that at least 80 % of the transformer capacity remains (in both ONAN and ONAF) if one cooler or one fan is removed.

4.1.3.2.5.6 *Cooler Control Equipment*

All the necessary automatic control, motor contactors, protective devices and switches for the forced-cooling equipment shall be assembled in cabinet or marshalling box mounted on the transformer.

The cooler control equipment shall include:



- An isolating switch rated to carry and break full-load current for each group of fan and pump motors.
- A "Cooler Auto" - "Cooler-Manual" changeover switch.
- Magnetic contactor for each group of fan motors. Contactor coil leads shall be wired to the terminal board. A set of normally-closed contacts shall be provided on each motor contactor for alarm purposes.
- Overload and single-phasing relays.
- Fuses, links and terminal boards to approval to make a complete assembly.

All equipment must be in accordance with the requirement given in general technical specifications.

#### **4.1.3.2.6 Off-load Tap Changer**

Transformer, if specified in Scope of Works, shall be provided with a ganged off-load tap changer operated by means of an external handle which can be pad-locked in each operating position. This switch shall have a rotary motion of operation. The tap changer shall be indelibly marked to indicate the tapping position corresponding to the diagram plate.

Tap changers with mercury sealing glands are not acceptable.

The tapping range shall be as specified in Scope of Works.

#### **4.1.3.2.7 Drain, Filter and Sampling Valves**

##### *4.1.3.2.7.1 General*

All valves shall be attached by bolted-on flanges and shall not be screwed or welded to the tank. Drain valves or isolating valves larger than 101,6 mm (4"B.S.P.) and of the double-flanged gate-type construction may have bodies of cast iron or cast steel. All valves shall be opened by turning counter-clockwise when facing the hand wheel.

Every valve shall be provided with an indicator to show clearly the position of the valve.

Means shall be provided for padlocking the valves in their open and closed position.

All valves shall be suitable for operation in conjunction with transformer oil as specified in IEC Publication 60296 at temperatures up to 115 °C.

##### *4.1.3.2.7.2 Drain Valves*

Drain valves shall be of suitable dimensions in relation to the volume of oil in the transformer tank and coolers.

##### *4.1.3.2.7.3 Oil Sampling Valves*

Oil sampling valves shall be of the screwed globe type; handle or gate valves located so as to permit sampling of oil from the extreme bottom of the transformer tank and the bottom of the tap changer compartment.

##### *4.1.3.2.7.4 Filtration Connections*

Filtration connections, which shall have flanges drilled to BS 4504 Table 6, for 50,8 mm (2") valves, or screwed 50,8 mm (2"B.S.P.) female, shall be as follows:

A valve at the top and bottom of the main tank. The drain valve of the main tank may be used for this purpose if of the size described above.

The oil conservator drain valve located within easy reach of the ground, by means of a pipe extension if necessary shall be suitable for a filter connection.

#### 4.1.3.2.7.5 *Valve Entries*

All valve entries shall be blanked off with gasketed bolted-on plates or plugs.

#### 4.1.3.2.7.6 *Rating and Diagram Plates*

Rating diagram and valve plates shall be to IEC 60076, stamped or embossed on brass or stainless steel. They shall show the employer's Order Number and shall have a blank space for the Employer's serial number. The diagram plate shall show the internal connections and the voltage vector relationship of the terminals.

Where applicable, rating or diagram plates shall show locations, ratio, rating and accuracy class of current transformers. Rating diagram and valve plates shall be approved by the Project Manager.

#### 4.1.3.2.8 **Oil**

The oil shall be of the uninhibited mineral type and comply with BS 148, IEC 60296 or equivalent standard.

Oil shall preferably be supplied in bulk from within Kenya and dried and cleaned on site. If oil is provided in drums, these shall have a volume of approximately 200 l and be full. A separate price shall be quoted for transformer oil.

#### 4.1.3.2.9 **On-Load Tap Changers**

##### 4.1.3.2.9.1 *General*

The transformer's voltage control equipment shall, if specified in Scope of Work, be of the tap changing type for varying its effective transformation ratio whilst the transformer is on load and without producing phase displacement. The on-load tap changing equipment shall comply with IEC 60214. The tapplings shall be arranged in the electrical centre of the higher winding.

The tap changing equipment shall be of the 3-phase type, preferably with combined diverter and selector switches and shall be designed so that it will not be possible for the main transformer winding to be open circuited or for a portion thereof to be short circuited, except through a transition impedance. The tap changers for transformer with higher capacity than 7.5 MVA shall be of the vacuum type, whilst lower capacity transformers may have conventional oil type.

Generation from any type of control shall cause one tap movement only.

The equipment shall be so arranged as to ensure that when a tap change has commenced, it shall be completed independently of the operations of the control relays or switches. Failure of the auxiliary supply during a tap change operation must not inhibit the independent completion of the tap change operation.

An auxiliary supply of 415/240 volts, 50 Hz, 3-phase 4-wire AC. will be available for operating the tap changing equipment and all its accessories. All equipment shall operate correctly at any voltage between the limits of 85 % and 115 % of nominal value.

Tap changing equipment shall be capable of carrying the same currents due to external short-circuit as the transformer windings and shall withstand the impulse and dielectric tests of the associated winding. The tap changer connection and switches shall be capable of handling continuously currents at least 20 % above the highest operating current in order not to limit overloading.

Where oil type used, it shall not be possible for the insulating oil in those compartments which contain contacts for making or breaking current to mix with the oil in the main transformer tank or with the oil in compartments containing contacts not used for making or breaking current

Drop-down tanks which necessitate the provision of pits in the foundations are not acceptable.

Where it is necessary to remove parts, or the whole of the on-load tap-changer for transport purposes, it shall be possible to complete erection on site with the transformer windings covered with oil.

#### 4.1.3.2.9.2 *Construction*

The number of the tappings in use shall be indicated mechanically at the transformer, electrically at the local control room panel and digitally at the Control Centre.

The tap-changing switches and mechanism shall be mounted in an easily accessible cabinet on the transformer tank and shall be supported from the main tank or its base.

The oil compartment for the tap changing switch shall be fitted with its own over-pressure device and Conservator; together with suitable oil level indication and drain valves. The conservator shall be dimensioned such that applicable expansion rates can be met.

All switches forming part of the main tap-changing apparatus shall be readily accessible and it shall be possible to examine or repair such apparatus without lowering the oil level in the main transformer tank.

Each compartment in which the oil level is not maintained from the conservator shall be provided with an oil gauge of approved design.

Limit switches shall be provided to prevent the over-running of the mechanism and shall be connected directly in the circuit of the operating motor. In addition, mechanical stops or other approved devices shall be provided to prevent the overrunning of the mechanism under any condition.

Approved means shall be provided to protect the motor and control circuits.

The whole tap-changing equipment shall be of robust design and capable of giving satisfactory service without undue maintenance under the conditions to be met in service, including frequent operation.

An externally visible mechanical recorder shall be fitted to the mechanism to indicate the number of tap-change operations completed by the equipment. At least five digits must be provided. No provision for resetting the counter is to be made.

#### 4.1.3.2.9.3 *Operation*

The tap changer shall be operated in the following modes:

- From an automatic voltage regulator in the substation (normal control).
- The control is part of the switchgear contract.
- Directly on the motor control cabinet in the switchyard (direct control).
- From the control room in the substation (local control).
- From the Control Centre (remote control).

A blocking switch shall be provided on the motor control cabinet/marshalling box with two positions: local/remote (supervisory).

When the switch is in local position, control can only take place from the control cabinet on the transformer and vice versa for the other position.

All the necessary equipment like relays, contactors, etc. shall be provided, wired up to terminal blocks to facilitate the functions outlined above. A potentiometer switch of the make before break type shall be provided for local and remote reading of tap position. The numbers shall range from 1 upwards, the lowest number representing a tapping position corresponding to the maximum number of high voltage winding turns, i.e. the highest plus-percent positions. The lowest minus-percent position shall be represented by the highest number. Cray or BCD codes shall be provided as an alternative for remote supervisory reading of tap position.

Unless specifically asked for in this document, all equipment for control and indication required in the control room shall be provided by the supplier of the control room equipment. Operating voltage for direct and local control shall be 240V AC.

Facilities shall also be provided to prepare the transformer for parallel operation with one or more transformers on the master - slave principle. An out-of-step device shall be provided and arranged to prevent further tap changing after a definite time interval when the transformer on parallel control is one tap out of step.

#### 4.1.3.2.9.4 *Tapping Switches*

The switch shall be mechanically robust and provided with a device between the handle and the switch to permit operation without strain in the event of imperfect alignment between switch and handle; the switch operating shaft shall be fully insulated as between tank and switch and shall be provided with a suitable oil and vacuum tight gland where it passes through the tank.

The use of wood shall be avoided wherever possible and all the supports and terminal boards shall be completely unaffected by hot oil and non-moisture absorbent. High grade insulating materials shall be used in the construction of tapping switches which shall be designed with special attention to the elimination of points where tracking is likely to occur.

#### 4.1.3.2.9.5 *Alarm and Trip Signals*

All alarm contacts shall have ample inductive making and breaking at the specified alarm and tripping voltage.

Any auxiliary relays associated with the trip circuits shall be DC operated and suitable for the specified alarm and tripping voltage.

Alarm and trip relays shall be provided with independent potential free contact.

The following alarms shall be provided, wired up to terminal blocks in the transformer cabinet:

- Tap changer not operating.
- Transformers on parallel control are out of step.
- Partial or complete failure of the voltage transformer supply to the voltage regulating relay. This alarm shall be inoperative when the transformer is on non-automatic control.
- Fan failure, alarm.
- Gas relay transformer, alarm.
- Gas relay transformer, trip.
- Protective relay OLTC, trip.
- Oil gauge low level transformer, alarm.
- Oil gauge low level transformer, trip.
- Oil gauge low level OLTC, alarm.
- Oil gauge low level OLTC, trip.
- Pressure relief device transformer operated, trip.
- Pressure relief device OLTC operated, trip.
- Top oil temperature high, alarm.
- Top oil temperature critical, trip.
- Winding temperature high, alarm.
- Winding temperature critical, trip.

#### **4.1.3.2.10 Local Control Cubicles and Wiring Cabinets**

Each power transformer shall be provided with a weatherproof (IP 54) local mechanism/control cubicle for control of the tap changer and the same for instrumentation and control of cooling fans. The cubicle shall be mounted on the side of the transformer tank. The cabinets and equipment installed there shall strictly follow the requirements found in general technical specifications.

All cubicles and cabinets shall be complete with the requisite front panels. Bidder shall provide in their Bid a complete list of all control, alarm, protection and indication facilities and equipment included in the Bid price each item to be identified with its function.

All indicating analogue instruments shall be flush mounting and the dials shall preferably be not less than 95 mm diameter if circular or, if rectangular have no side less than 95 mm.

An indelible chart showing lubrication points and specifying recommended lubricants and frequency of application shall be provided in all mechanism cubicles.

Provision for outgoing connections from the transformer control cubicles and cabinets shall be made for multicore cables. An undrilled removable glad plate to accommodate compression-type glands provided by the Employer shall be supplied. Each terminal box shall have an earthing stud for earthing of the incoming cable screens.

#### **4.1.3.2.11 Wiring and Terminal Blocks**

The switchgear contractor shall lay and connect control and power cables from the indoor control and switchgear to the local cabinets described above. All internal cabling between the transformer primary points and local cubicles and cabinets shall be provided by the Contractor. The cable laying and fastening shall be as described in general technical specifications.

#### **4.1.3.2.12 Manufacturing, Inspections and Tests**

The Contractor shall document the progress in factory with photographic records of the progress included in the progress reports. These colour photographs shall upon completion of the works be submitted in bound form together with explanatory description to the Employer.

##### *4.1.3.2.12.1 Inspection/Witnessing of Tests*

The Employer and the Project Manager, reserves the right to inspect the transformer at any stage of manufacture or to be present at any of the tests specified. Such inspection shall not relieve the Contractor of his responsibility for meeting all the requirements of the specification, and it shall not prevent subsequent rejection if such material or equipment is later found to be defective.

The contract shall include financial provision for participation by the Employer in Factory Acceptance Tests as described in scope of works. The Contractor shall in good time inform when testing will take place and shall give the Employer/Project Manager not less than twenty eight days notice in advance. No transformer shall be tanked, or despatched from the Contractor's works without approval of Project Manager. Based on the Contractor's manufacturing programme, factory inspection will take place as required by the Employer/Project Manager.

##### *4.1.3.2.12.2 Factory Tests*

###### Bushing Tests

The Contractor shall submit for approval test records and data for all bushings. These records shall show the test performed on the bushings including but not necessarily restricted to the following tests:

- Standard, one minute, 50 Hz dry withstand tests for all bushings.
- Type test of impulse withstand voltage.

All recorded test figures shall be given with the bushings serial number.

###### Transformer Tests

###### Routine Tests

Routine tests as far as applicable shall be carried out according to the IEC Publication 60076.

The following routine tests shall be applied to all transformer:

- Resistance measurements of all windings for all tapplings.
- Ratio tests for all tapplings and vector relationship tests.
- Measurement of no-load losses and currents.
- Measurements of impedance voltages (at maximum, principal and minimum tapplings), short circuit impedances and load losses. Load losses shall be measured at both rated currents when ONAN and ONAF cooling are specified.
- Determination of efficiencies at 50%, 75%, 100% and 120% load at maximum temperature of the winding and 0.8 power factor lagging and unity power factor for all ratings (ONAN, ONAF ratings).
- Zero sequence impedance measurement.
- Induced voltage and separate source voltage withstand power frequency, dielectric tests on all windings on all phases including neutral points.

- Full wave impulse withstand tests. The transformer shall be subjected to a complete series of tests. Such tests shall be applied to the HV winding line terminal of each phase as well as to the neutral points.
- Tests on on-load tap changers.
- Routine tests on all transformer accessories such as motors, contactors wiring, etc.
- Partial discharge measurements.
- Measurements of capacity between the windings and each winding and ground.
- Oil leakage test. The complete oil filled transformer with bushings and radiators fitted and any other attachment normally in contact with oil shall be tested at a positive pressure measured at the tank bottom of twice the column of oil in the transformer when the transformer is cold, but in any case not less than 70 kPa. Alternatively the radiators may be tested separately with the same pressure. The test period shall be not less than 12 hours.
- Core insulation test, 2 kV, 50 Hz for one minute.

#### Special tests

- Chopped wave impulse test on each transformer. The test shall be carried out in conjunction with the full wave test as described in IEC 60076-3.

#### Type Tests

The following type tests shall be carried out on one transformer of each type:

- Temperature rise test. Details of the test procedure shall be agreed between Contractor and Project Manager before testing commences.
- Noise measurements.
- Vacuum test. The transformer tank and radiators filled with oil shall be subjected to a vacuum test. Bushings need not be fitted and the radiators and conservator may be tested as separate units.

#### *4.1.3.2.12.3 Site Tests*

Testing at site by the Contractor shall be carried out to prove that the transformer in all respects complies with provisions and guarantees set forth in the Contract.

Tests shall include but not be limited to the following:

- Dielectric oil tests.
- Insulation dryness by an agreed method.
- Electrical and functional control of voltage control equipment and cooling system.
- Core to tank insulation.

#### **4.1.3.2.13 Erection**

Erection shall be carried out on foundations made by the switchgear contractor or by the Contractor under supervision by the Project Manager. The Contractor shall ascertain that the transformer have been erected according to the Terms of Contract before commissioning takes place.

All heavy erection equipment like lifting cranes and other equipment to be used for erection purpose shall be provided by the Contractor. The Contractor shall also provide all special equipment for erection and testing purpose. Such equipment shall be listed in the Bid.

#### **4.1.3.2.14 Delivery and Transport**

The transport to site is the Contractor's sole responsibility. Under road part of the transport, the transport must be in accordance with the rules for road transport in the respective countries. If any special investigations, permits or arrangements are necessary for the road transport these have to be arranged for by the Contractor. Cost for such shall be included in the price.

Shipment of transformer in any position other than the upright one is not permissible.

All shafts, bearings and machined surfaces exposed for transport to the site shall be given a temporary protective coating to prevent corrosion.

If it is necessary to remove bushings or radiators for transport blanking-off plates and a spare set of gaskets shall be provided.

Where the supply of oil is included in the contract, and transport weight limitations permit, the transformer shall preferably be transported with sufficient oil to cover the core and windings. The tank shall be sealed for transport to prevent all breathing. The remainder of the oil to be supplied separately at the time of delivery.

Alternatively, where the above method is not applicable or practicable, the transformer shall be transported filled with dry nitrogen under slight positive pressure. This pressure and the temperature at the time of filling shall be communicated to the Project Manager and a pressure gauge suitably protected is to be fitted to each transformer to facilitate inspection of the gas pressure on arrival at site. Every precaution shall be taken to ensure that the transformer arrive at site in a satisfactory condition so that subsequent to oil filling, they may be put into service without the necessity for further drying out. Should the positive gas pressure disappear during transport and the transformer allowed to breathe, additional drying out at site if required shall be the responsibility of the Contractor.

All accessories and spares which are shipped separately must be clearly marked for identification with the transformer for which they are intended. All pipe work and valves shall have further markings showing the correct points of assembly which shall also be shown on assembly drawing to be supplied.

Full details must be supplied on methods of drying out the windings, if found necessary, on arrival and on the method to be adopted for oil filling and oil purification on site. Any special apparatus required for oil filling must be supplied as part of this contract.

The transformer shall be shipped with an impact recorder having capacity of four months recording. Full details of the proposed methods of transport shall be submitted for approval.

#### **4.1.3.2.15 Evaluation of Losses**

##### *4.1.3.2.15.1 Guaranteed Output and Losses, Liquidated Damages*

Failure to meet the guaranteed outputs and losses will be dealt with as follows:

##### *4.1.3.2.15.2 Transformer Output*



If the guaranteed continuous output at rated voltage of any transformer has to be reduced below the guaranteed value in order to maintain the temperature rises of any part of the transformer within the guaranteed limits, liquidated damages shall be paid at the rate of USD 2 577 per kVA.

#### 4.1.3.2.15.3 *Transformer Losses*

If the total transformer losses of any transformer, as determined by these, without any tolerances, at rated voltage, frequency and 100% rated kVA (on principal tapping) exceed the guaranteed total losses, the excess in losses shall be capitalised at the rates stated in below and the resulting amount shall be paid as liquidated damages.

The payment on account of failure of one or more transformer to meet the guaranteed output and guaranteed losses shall be applied individually, as the case may be, and shall therefore be understood to be cumulative.

#### 4.1.3.2.15.4 *Rejection Limits*

Should any transformer fail to meet the guaranteed output by more than 5% (five per cent) or the total losses should exceed the total guaranteed losses by more than 1/5 (one fifth), and should the Contractor fail within a reasonable time to modify the transformer in order to increase the output and/or reduce the losses sufficiently, the Purchaser shall have the option to reject the transformer.

#### 4.1.3.2.15.5 *Evaluation of Losses*

Transformer losses will during tender evaluation be evaluated based on the following figures (ref Bid data Sheet):

|                 |             |
|-----------------|-------------|
| Load losses:    | USD 1070/kW |
| No load losses: | USD 4300/kW |

If nothing other is specified in Scope of Work, Load losses will be evaluated based on the **ONAF** rating for transformer with combined ONAN/ONAF cooling. The Bidder must submit losses in the Guarantee Schedules **without** tolerances.

#### 4.1.3.2.16 **Drawings to be submitted with Bid**

The following shall be included with the Bid:

(Note: if complete design drawings are not available, drawings should be submitted of an existing design equivalent in all essential detail to that being offered).

- a. Dimensioned outline drawings of the transformer and any auxiliary plant showing:
  - The arrangement and position of all fittings and accessories.
  - Any section to be removed for shipment and their separate dimensions and weights.
  - Principal dimensions and minimum clearances (phase/phase and phase/earth).
  - Weight, sling angles and height from ground level to crane hook applicable for lifting:
    - The tank cover
    - The complete transformer
    - The cores and coils out of the tank
  - Position and function of all valves.

- Position and function of all access openings.
  - Total weight and distribution of weight to enable foundations to be designed (to be designed by the Employer).
- b. Drawings showing the arrangement of the core and windings including core clamping arrangement.
- c. Detailed drawings of the tapping switch showing internal details of switch and mechanism, tapping connections and change-over link board.
- d. Fully dimensioned drawings of all proposed bushings including cross-sections and full electrical characteristics.
- e. Schematic wiring diagrams of automatic voltage control, cooler control, and protection systems with fully detailed description of the operation.
- Drawings of proposed rating and diagram plates.
- f. Catalogues of all accessory equipment and fittings.

### 4.1.3.3 Distribution and Auxiliary Transformers

#### 4.1.3.3.1 General

This specification covers the manufacture; testing, supply and delivery of pole mounted distribution type transformer and spares.

#### 4.1.3.3.2 General Design

Transformer shall be of the mineral oil immersed "core" (wound core or shell type shall not be provided) type suitable for outdoor use with Oil Natural Air Natural (ONAN) cooling. Primary and secondary bushings shall be located on top cover

Transformer shall be designed to deliver full rated power continuously on any tapping within the specified tapping range under the following conditions:-

- i) With the voltage of the untapped winding at rated value, without the need to de-rate the transformer at the extreme tap positions and without exceeding IEC temperature limits.
- ii) With voltage applied up to 10% in excess of the rated tapping voltages and without injurious overheating.

Transformer shall be connected in accordance with IEC 60076 or equivalent : three phase transformers to Vector Group reference Dynll.

All L.V. neutrals shall be brought out of the tank to a readily accessible terminal and shall not be earthed inside the tank, unless otherwise specified in the enquiry.

Transformer on a particular contract with similar voltage ratios and connections shall be suitable for parallel operations on all relevant taps under which conditions they should share the load in proportion to their ratings subject to the tolerances on impedance laid down in IEC 60076.

Low impedance transformer are preferred, a maximum of 5% being envisaged on any size with no plus tolerance.

When requested in the enquiry, sealed designs shall be offered and the following details shall apply:

- i) Unless otherwise approved, sealing shall be effected by means of a bolted cover design employing non standard bolts on the top cover (keys shall be supplied for each transformer).
- ii) Any holes or plugs used to facilitate vacuum/pressure testing, leak testing or oil filling of the transformer shall finally be sealed by welding.
- iii) The expansion of the oil level shall be accommodated by the tank itself (i.e. no gas filled pillow will be accepted). The bidder must submit documentation showing tests simulating 40 years of expansion and contraction of the tank without impairment of the rib welding.

An oil level gauge shall be provided.

Pressure valves, pressure/vacuum gauges, non-return valves and drain valves shall not be fitted.

Earth stud required at both H.V. and L.V. ends of transformer.

The transformer shall operate without undue noise and every care shall be taken in the design and manufacture to reduce noise to the level of that obtained in good modern practice. The noise level of the transformer shall not exceed 60 dB(A) when tested in accordance with IEC Publication 60551.

#### *4.1.3.3.2.1 Windings*

Tappings shall be provided in the H.V. windings, preferably in the centre of the windings, to permit variation of the number of H.V. turns without significant variation in the kVA rating. The variations shall be effected by means of a manually operated tapping switch to be provided.

All windings and terminations shall be fully insulated and those for service above 1000 volts shall be designed for impulse voltage tests. Conductor material shall be copper. No foil windings shall be used.

Designs shall be such that electrical stresses are as uniform as possible throughout the windings under impulse conditions.

Windings shall be vacuum impregnated and insulating materials shall not be liable to soften, shrink, become brittle, carbonise, deteriorate, or collapse in any way during service.

#### *4.1.3.3.2.2 Cores*

The magnetic circuit shall be earthed to the core clamping structure, at one point only, and the core assembly to the tank. Where transformers are not sealed readily accessible removable bolted links shall be employed for the earthing connections.

The general construction of the cores, framework and the clamping arrangements shall be robust and such that they will be capable of withstanding completely any stresses which may occur due to handling, transport or service. All cores and yokes shall be terminated and clamped by means of a suitable framework. Suitable means shall be provided for lifting the cores from the tanks.

It shall not be possible for the core to move relative to the tank during handling or transport.

Particular attention shall be paid to maintaining low core loss consistent with sound design.

#### *4.1.3.3.2.3 Tapping Switches*

The transformer shall be provided with approved off-circuit type tap changing equipment.

A fully insulated off-circuit, externally manually operated ganged tapping switch shall be supplied, capable of withstanding the specified impulse voltage when connected to the transformer windings.

Clearly visible tap position indication shall be provided. The tapping switch shall be operated by means of an external handle that can be positively located and locked in each operating position.

The switch shall be mechanically robust and provided with a device between the handle and the switch to permit operation without strain in the event of imperfect alignment between switch and handle; the switch operating shaft shall be fully insulated as between tank and switch and shall be provided with a suitable oil and vacuum tight gland where it passes through the tank.

The use of wood shall be avoided wherever possible and all the supports and terminal boards shall be completely unaffected by hot oil and non-moisture absorbent.

High grade insulating materials shall be used in the construction of tapping switches which shall be designed with special attention to the elimination of points where tracking is likely to occur.

Tapping switches shall be mounted on supports made of suitable high strength insulating material and shall be provided with self-aligning spring loaded wiping contacts capable of maintaining good electrical contact without the need for periodic maintenance.

All clearances between tapping switch contacts and leads shall be indicated on drawings submitted at the time of Bidding and such clearances shall be sufficient to prevent tracking or flashover in the event of carbon or sludge deposits forming on leakage paths.

H.V. tappings : Minus 2.5% : 0% : Plus 2.5% : Plus 5% : Plus 7.5%.

#### *4.1.3.3.2.4 Outdoor Bushings*

All line terminals and neutral connections where specified, shall be brought out to porcelain outdoor type terminal bushings in accordance with DIN 4253 with minimum creepage distance 31 mm/kV in Coast and industrial area and 25 mm/7kV in inland installations. Arcing horns shall be fitted on all transformer bushings. As an alternative factory mounted surge arresters are acceptable.

### **4.1.3.3.3 Tanks and Conservators**

#### *4.1.3.3.3.1 General*

Drain valves may be either screwed or flanged whilst conservator isolating valves shall be flanged. Drain valves shall be complete with captive plugs that shall be either of non-ferrous metal or galvanised.

All internal steel surfaces or tanks and conservators shall be shot blasted and cleaned, and a coat of protecting compound, unaffected by hot oil, should be applied.

All external surfaces and parts made of steel are to be thoroughly shot blasted and cleaned, after which two coats of priming paint, preferably of zinc chromate, one intermediate coat and one coat of finishing paint are to be applied. The Project Manager shall approve the colour.

Transformers on which the paints are found to flake off or deteriorate within the guaranteed period shall be suitably cleaned and repainted free of charge by the supplier.

#### 4.1.3.3.3.2 *Tanks*

Each transformer shall be housed in a tank of welded steel plate construction suitably stiffened where necessary but with a flat base. Wheels or rollers are not required.

Each tank shall be provided with the accessories specified Table 1, the lifting lugs called for shall be suitable for lifting the transformer bodily by means of a hoist or crane when it is completely assembled and ready for service.

All transformers shall be provided with four fixing lugs on the base drilled with 15 mm holes for bolting to a platform. The fixing holes shall project beyond the ends of the tank and be placed to provide the most practical stable arrangement.

No radiators or tube coolers shall be used. Ribbed tanks shall, if needed, be supplied in order to achieve the necessary cooling under the conditions prevailing at site.

#### 4.1.3.3.3.3 *Conservators*

Conservators shall be of dimensions such that oil expansion may occur over the working range temperature from no load with the transformer cold at minus 5 °C ambient air temperature to full load at plus 45°C ambient air temperature while the sump pipe remains covered and the oil level is visible or indicated.

The fittings detailed in Table 1, shall be provided on all transformer conservators.

Drain plugs shall preferably incorporate approved sampling facilities, and shall be mounted at the lowest part of the conservator tank and so designed that the sampling device can be readily cleared in the event of its being blocked by an accumulation of sludge etc., without the necessity of having to dismantle the device completely.

Oil level gauges on conservator tanks shall be of the refracting plate glass or other approved type, marked with the level at 20°C at no-load and capable of indicating the level of oil over the specified working range.

Where dehydrating breathers are specified they shall be of the Silica gel type (cobalt free), in accordance with DIN 42567, which give indication of moisture absorption by change in colour of the charge. The breather shall be covered by a metal tube to avoid vandalism. An inspection window shall be provided and mounted in a position convenient for inspection. The breather is to incorporate an oil seal to prevent contact with the external air when breathing is not taking place. The breather to be fitted on the L.V. end of the transformer.

Where only a vent pipe without a breaker and incorporating a filling hole is specified, it shall preferably be fitted with a cap and provided with very fine mesh incorrodible anti-vermin gauze.

#### 4.1.3.3.3.4 *Accessories and Fittings*

All transformers shall be provided with accessories and fittings in accordance with Table 1, unless otherwise specified in the enquiry.

Rating and diagram plates shall be of engraved steel, brass or other approved incorrodible material.

Where a thermometer pocket is provided, it shall be of a thin walled metal mounted in the tank cover.

The pocket shall project 25mm outside of the tank and shall be threaded along the whole projecting portion, a screwed cap shall be provided to cover the pocket when not in use.

Lightning arresters equipped with galvanised brackets suitable for bolting to a vertical surface shall be mounted directly on to the transformer tank. The mounting surface shall be such that the centre lines of the arresters are parallel with the centre lines of the associated bushings, and at the same spacing as the bushings.

Table 1 ACCESSORIES AND FITTINGS FOR DISTRIBUTION TRANSFORMERS

| Item No   | 15-315 kVA   |   |
|---|--|---|
| <u>Transformer Tank Fittings</u>  |  |   |
| 1. Conservator (Sealed type)  |  | N |
| 2. Drain valve with captive sealing plug  | Y  |   |
| 3. Lifting lugs   | Y  |   |
| 4. Thermometer Pocket   | N  |   |
| 5. Rating and diagram plate   | Y  |   |
| 6. Hanger irons   | N  |   |
| 7. Platform mounting lugs   | Y  |   |
| 8. Earthing Terminal  | Y  |   |
| 9. Lightning arrester brackets  | Y (if LA offered)  |   |
| 10 Arching Horns  | Y  |   |
| 11. Lightning Arrestors   | Y (as alternative)   |   |
| 11. Dial type thermometer   |  | N |
| 12 Jacking pads   | Required only when the mass of the complete transformer is 1000 kg or more |   |
| 13. Oil gauge   |  | Y |
| 14. Mounting plate for Item 5 (to be suitable for mounting marshalling box Item 16) | N  |   |
| 15. Lashing down facilities   |  | Y |
| 16. Marshalling box for Item 10 of Tank fittings and Item 7 of Conservator fittings | N  |   |
| <u>Conservator Fittings</u>   |  |   |
| 1. Drain plug   | Y  |   |
| 2. Sampler  | Y  |   |
| 3. Separate filling hole with cap.  | Y  |   |
| 4. Dehydrating breather   | Y  |   |
| 5. Plain breather   | N  |   |
| 6. Oil gauge  | Y  |   |
| 7. Gas & oil actuated relay   |  | N |
| 8. Conservator isolating valve  | N  |   |

Y = Required

N = Not Required



#### 4.1.3.3.3.5 *Insulating Oil*

The transformer shall be filled with low viscosity mineral insulating oil, which complies in every respect with the provision of IEC 60296.

#### 4.1.3.3.4 **Tests**

The following tests shall be carried out:

- a) Routine covering test certificates shall be submitted, immediately after completion of tests in the factory, for each and every transformer.
- b) As a type test, temperature rises test on each different rating of transformer.
- c) As a special test, an impulse voltage withstands test including chopped waves on each different rating of transformer.

Note: If tests to b) and c) above have been carried out satisfactory on designs identical in all essential details, these tests may be waived on the production of acceptable covering test certificates.

#### 4.1.3.3.5 **Packing and Transport**

Transformer shall be transported to destination with their tanks full of oil up to the service level.

Bushings and any accessories or fittings likely to be damaged shall be protected adequately against damage in transit.

#### 4.1.3.3.6 **Drawings and Diagrams**

##### 4.1.3.3.6.1 *With Bid*

The following drawings shall be supplied with any Bid unless identical drawings have been previously supplied, in which case a statement in the Bid of the applicable drawing subjects, numbers and revisions will suffice together with details of the references under which previous supply was made:

General arrangement drawing of each rating of transformer offered showing:-

- i) Minimum clearance (phase to phase and phase to earth) on H.V. and L.V. bushings including clearance H.V. to L.V.
- ii) Positions and identification in a separate legend of all fittings with type numbers.
- iii) Size and position of all fixing holes.
- iv) Total weights with and without oil and core lifting height and weight.

Detail dimensioned drawings of tapping switch illustrating type of material, clearances, between tapping points and to earth and method of operation.

Detailed dimensioned drawing of bushings, silica gel or plain oil seal type breather, and conservator.

Note: Where sealed transformers are offered, a cross arrangement drawing shall be submitted with the Bid showing, in particular, details of the tank construction and internal tank finish and the depth of the expansion space above the oil.

*4.1.3.3.6.2 With Contract*

Latest issues of the drawing shall be supplied under the contract; if no modifications are applicable to the drawings supplied with the Bid, this shall be confirmed in writing under the contract and further drawings need not be supplied.

Rating and diagram plate drawing shall be supplied.

**4.1.3.3.7 Evaluation of Losses**

As for the main transformers

**SECTION - VI**

**PARTICULAR SPECIFICATIONS  
SUBSTATIONS CIVIL WORKS**

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>4.1.4 PARTICULAR SPECIFICATION CIVIL WORKS</b> .....                       | <b>79</b> |
| 4.1.4.1 General.....  | 79        |
| 4.1.4.1.1 Location of the Works.....  | 79        |
| 4.1.4.1.2 Type of Works.....  | 79        |
| 4.1.4.1.3 Switchgear Building.....  | 79        |
| 4.1.4.1.4 Sequence of Construction.....                                       | 80        |
| 4.1.4.1.5 Drawings.....   | 80        |
| 4.1.4.1.6 Use of Site.....  | 80        |
| 4.1.4.1.7 Plan of Operations and Temporary Works.....                         | 80        |
| 4.1.4.1.8 Contractor's Office and Accommodation, etc.....                     | 80        |
| 4.1.4.1.9 Dealing with Water.....   | 81        |
| 4.1.4.1.10 Liaison with Police and Other Officials.....                       | 81        |
| 4.1.4.1.11 Explosives and Blasting.....                                       | 81        |
| 4.1.4.1.12 Works Executed by the Project Manager or by Other Contractors..... | 81        |
| 4.1.4.1.13 Water Supplies for the Works.....                                  | 82        |
| 4.1.4.1.14 Employer's Approval of Finished Works.....                         | 82        |
| 4.1.4.1.15 Preservation of Trees.....   | 82        |
| 4.1.4.1.16 Survey Beacons.....  | 82        |
| 4.1.4.1.17 Basic Survey and Setting Out.....                                  | 83        |
| 4.1.4.2 EARTHWORKS.....   | 83        |
| 4.1.4.2.1 Bush Clearing.....  | 83        |
| 4.1.4.2.2 Access and Internal Roads.....                                      | 83        |
| 4.1.4.2.3 Removal of Top Soil.....  | 85        |
| 4.1.4.2.4 Classification of Materials.....                                    | 85        |
| 4.1.4.2.5 Order of Work.....  | 85        |
| 4.1.4.2.6 Fill Material.....  | 86        |
| 4.1.4.2.7 Spoil Material.....   | 87        |
| 4.1.4.2.8 Expansive Material.....   | 87        |
| 4.1.4.2.9 Surplus Material.....   | 87        |
| 4.1.4.2.10 Side Drains.....   | 87        |
| 4.1.4.2.11 Excavation in "Rock".....  | 87        |
| 4.1.4.2.12 Setting Out and Preparation for Earthworks.....                    | 88        |
| 4.1.4.2.13 Construction of Earthworks to Formation.....                       | 88        |
| 4.1.4.2.14 Unsuitable Material Information.....                               | 89        |
| 4.1.4.2.15 Spreading and Compaction of Embankment and Fills.....              | 89        |
| 4.1.4.2.16 Drainage of Works.....   | 89        |
| 4.1.4.2.17 Sub-grade Layer.....   | 89        |
| 4.1.4.2.18 Tolerances.....  | 89        |
| 4.1.4.2.19 Protection of Embankment Slopes.....                               | 89        |
| 4.1.4.2.20 Grassing of Slopes.....  | 90        |
| 4.1.4.2.21 Borrow Pits.....   | 90        |
| 4.1.4.2.22 Soil Sterilisation.....  | 90        |
| 4.1.4.2.23 Earth Electrode.....   | 90        |
| 4.1.4.2.24 Platform Areas.....  | 90        |
| 4.1.4.3 MATERIALS FOR THE WORKS.....  | 90        |
| 4.1.4.3.1 General.....  | 90        |
| 4.1.4.3.2 Standards.....  | 91        |
| 4.1.4.3.3 Filter Backfill for Sub-soil Drains.....                            | 91        |
| 4.1.4.3.4 Stone for Pitching.....   | 91        |
| 4.1.4.3.5 Stone for Platform Surfacing.....                                   | 91        |
| 4.1.4.4 DRAINAGE AND STORM WATER.....   | 91        |
| 4.1.4.4.1 Drainage.....   | 91        |
| 4.1.4.5 FENCING.....  | 92        |
| 4.1.4.5.1 Fencing.....  | 92        |
| 4.1.4.5.2 Dimensions.....   | 92        |
| 4.1.4.5.3 Materials.....  | 93        |
| 4.1.4.5.4 Installation.....   | 93        |
| 4.1.4.6 CONCRETE AND BUILDING WORKS.....                                      | 94        |
| 4.1.4.6.1 Earthworks.....   | 94        |
| 4.1.4.6.2 CONCRETE, FORMWORK AND REINFORCEMENT.....                           | 95        |
| 4.1.4.6.3 BUILDER'S WORK.....   | 99        |
| 4.1.4.6.4 PLASTER AND FLOOR COVERINGS.....                                    | 105       |
| 4.1.4.6.5 GLAZING AND PAINTING.....   | 106       |
| 4.1.4.6.6 SUBSTATION BUILDING SIZES.....                                      | 108       |
| 4.1.4.6.7 IRONMONGERY AND METALWORK.....                                      | 108       |

4.1.4.6.8 ELECTRICAL INSTALLATION..... 108

## **4.1.4 PARTICULAR SPECIFICATION CIVIL WORKS**

### **4.1.4.1 General**

#### **4.1.4.1.1 Location of the Works**

The locations of the sites are as described under the relevant clauses in scope of works in Volume 2.

#### **4.1.4.1.2 Type of Works**

The works to be constructed under this Contract include the following:

- Work for access and substation road
- Earthworks for sub-station platform
- Subsoil drains and storm water drains
- 100 mm thick layer of stone to platform surface
- Fencing
- Concrete bases and Stub columns
- Cable Trenches
- Switchgear Building
- Transformer foundations
- Any other works necessary for full completeness

#### **4.1.4.1.3 Switchgear Building**

10MVA Substations and above

The switchgear building shall contain the following rooms:

- Switchgear room to accommodate all the switchgear panel plus a space that would accommodate 4 more feeder panels in the future.
- Battery room (to accommodate both protection and communication batteries)
- Office room (4mX4m). Office furniture (cabinets, chairs and office table)
- Kitchen
- Communication equipment room (5mX4m)
- Toilet facility –(2 No)
- Control and protection Panel room to accommodate the necessary Protection and control panels and space for future expansion (one more bay for transformer and one for Line).
- Minimum area for the building is 275 square meters.
- Appropriately place emergency doors for fire escape.
- 

10MVA Substations and Below

The Control Room building shall contain the following rooms:

- Control and protection Panel room to accommodate the necessary Protection and control panels and space for future expansion (one more bay for transformer and two for Line).
- Battery room (to accommodate both protection and communication batteries)
- Office room (3mX3m). Office furniture (cabinets, chairs and office table) and kitchenette
- Communication equipment room 3mX3m
- Charger, DCDB and ACDB equipment room 3mX3m
- Minimum area for the building is 70 square meters.

- Toilet facility – 2 No. VIP Pit Latrines

Appropriately place emergency doors for fire escape

In addition a guardhouse with toilet facilities located at the main gate shall be constructed. The guardhouse area shall be clearly demarcated from the restricted area.

**All the rooms shall be pressurised to avoid dust.**

#### **4.1.4.1.4 Sequence of Construction**

The Contractor must complete all the civil works in time to provide a clean and complete site for the mechanical and electrical erection.

The Contractor shall be responsible for timely delivery of materials to site and for compliance with the specified or agreed construction programme.

#### **4.1.4.1.5 Drawings**

Any Drawings issued with these documents are for tendering purposes only. Drawings for this project shall be made by the Contractor or his civil consultant, and be to the approval of the Project Manager.

#### **4.1.4.1.6 Use of Site**

The Contractor will restrict his activities to within the Sites. Access for others to work on the site concurrently with this Contract shall be maintained as far as possible. Where it is necessary for persons on foot or in vehicles, including other Contractors, to cross the site whilst work is in progress, the Contractor shall provide warning signs on either side of the Work and flagmen if necessary to guide such persons safely across the Site. The cost of maintaining access for others and assisting the passage of others across the Site shall be deemed to be covered by and included in the rates entered by the Contractor in the Price Schedules.

#### **4.1.4.1.7 Plan of Operations and Temporary Works**

The Contractor shall, in accordance with Conditions of Contract and before commencing work on Site, submit to the Project Manager a fully detailed programme showing the order of procedure and method by which he proposes to carry out the construction and completion of the Civil Engineering works, and particulars of the organisation and staff proposed to direct and administer the performance of the Works.

The information to be supplied to the Project Manager shall include Drawings showing the general arrangements of his temporary offices, camps, storage sheds, buildings and access roads, and details of Constructional Plant and Temporary Works proposed.

#### **4.1.4.1.8 Contractor's Office and Accommodation, etc.**

The Contractor shall be responsible for his offices, accommodation, storage and workshops. The Contractor may fence this area for his own security for the duration of the Contract but any such fence erected together with all buildings, plant and

materials shall be removed, all holes filled in and the site left in a tidy and level condition upon completion of the Contract.

#### **4.1.4.1.9 Dealing with Water**

The Contractor shall keep the whole of the Works free from water and he will be deemed to have included in his rates in the Price Schedules for all pumping, shoring, temporary drains, sumps and other measures and provisions necessary for such purposes and for clearing away and making good to the satisfaction of the Project Manager damage caused thereby.

The Contractor shall keep all existing drainage channels clear and shall not obstruct the passage of water to or away from any such drainage channels.

#### **4.1.4.1.10 Liaison with Police and Other Officials**

Contractor shall cooperate closely with the Police and other officials of the area concerned regarding their requirements in the control of workmen, movement of traffic, or other matter.

#### **4.1.4.1.11 Explosives and Blasting**

The Contractor shall use explosives for blasting in connection with the work only at such times and places and in such a manner as the Project Manager may approve, but such approval shall not relieve the Contractor from his responsibility for injury, loss, inconvenience and annoyance to persons, the Work and adjoining structures, roads, places and things and injury or damage to animals and property consequent on the use of such explosives. The Contractor shall be entirely liable for any accident that shall occur and shall save the Project Manager harmless and indemnified from all claims arising from such use of explosives.

The Contractor shall keep in his office at the Site copies of Laws applying to the transport, storage and use of explosives and shall also submit to the Project Manager a copy of any instructions or notices which the Contractor may issue to his staff or workmen or post about the site in compliance with such Laws.

The Contractor shall submit to the Project Manager details of the explosives, which he proposes to use, and of his proposals for the transport and storage of explosives.

#### **4.1.4.1.12 Works Executed by the Project Manager or by Other Contractors**

The Project Manager reserves the right to execute on the site, works not included under this Contract and to employ for this purpose either his own employees or other contractors.

The Contractor shall ensure that neither his own operations nor trespass by his own employees shall interfere with the operations of the Project Manager or his Contractors employed on such works and the same obligations shall be imposed on the Project Manager or his contractors in respect of work being executed under the Contract.

The Contractor shall provide unhindered access to all parts of the site to the Project Manager, authorised representatives of the Project Manager and of public bodies and corporations, and to contractors employed by the Project Manager, and he shall



make available to such authorised persons the use of all temporary access tracks in or about the site.

Where works are being carried out concurrently in one area careful co-ordination of operations will be required so that interference can be minimised. The Project Manager shall have the power to regulate and rearrange the order of execution of the Works under this Contract to achieve the best co-ordination practicable. The Contractor's programme shall take into consideration all information on co-ordination available at the time of its preparation and it shall be flexible enough to allow for subsequent changes that may become necessary. The rates tendered for the Works shall include the costs of complying with the requirements of this Clause.

#### **4.1.4.1.13 Water Supplies for the Works**

The Contractor shall make his own arrangements for the supply of potable water for his staff on site and water for the Works.

The Contractor must make all arrangements including the supply of pumps and motors, labour and the like to abstract water and must pay royalty to the owners. These costs shall be included in his prices.

If the Contractor fails to obtain permission to utilise existing water sources, he may have to drill boreholes near the sites at suitable locations.

The Contractor shall obtain the Employer's or the Project Manager's prior approval before utilising any water source for the Works. The contractor shall connect the site to main water supply on completion of works. In addition provide 6000 litre water storage and two other 1000 litres tanks for the toilets.

#### **4.1.4.1.14 Employer's Approval of Finished Works**

The Contractor shall obtain the approval of the Project Manager for each section and each stage of construction. Approval of any section of any stage will not be given, and the Contractor shall not proceed with any subsequent stage, until all tests required by the Project Manager have been carried out, and the results have shown that the section complies with the Specification. Any works rejected by the Project Manager as not complying with the Specification shall be replaced by the Contractor at his own expense.

#### **4.1.4.1.15 Preservation of Trees**

No tree shall be removed without prior permission of the Project Manager who will limit the removal of trees to the minimum necessary to accommodate the permanent Works.

#### **4.1.4.1.16 Survey Beacons**

During the progress of the Works, the Contractor shall not remove, damage, alter or destroy in any way any permanent beacons or survey beacons. Should the Contractor consider that any survey beacon will be interfered with by the Works, he will notify the Project Manager, who, if he considers necessary, will make arrangements for the removal and replacement of the beacon.

If the Contractor removes or disturbs a beacon without the prior permission of the Project Manager he shall be liable for the full cost of its replacement together with

the full cost of re-establishing the data relevant to it. The contractor shall establish the beacons once handed over the site.

#### **4.1.4.1.17 Basic Survey and Setting Out**

The Contractor will survey the sites in detail, and the exact locations shall be agreed with the Project Manager.

The details of beacons and benchmarks shall be provided in the site survey drawings.

The Works are located on the drawings and the Contractor shall appoint a suitably qualified Surveyor to set out the Works from the beacons and shall plot cross sections at 20 m intervals and submit to the Project Manager for approval.

No separate payment will be made for any work in connection with the setting out of the Works, nor any other Works required by the Contractor to ensure the accurate location and construction of the Works.

### **4.1.4.2 EARTHWORKS**

#### **4.1.4.2.1 Bush Clearing**

The areas of the platform and borrow pit shall be cleared of all trees, vegetation and roots. These shall be neatly stockpiled within 3 km of the site at locations agreed with the Project Manager and shall remain the property of the land owner.

Any structures on site to be demolished and removed by the contractor and to be included in the price schedule.

#### **4.1.4.2.2 Access and Internal Roads**

Where necessary access roads to the substation sites shall be constructed to gravelling / murrum standard. Internal substation road and walk paths shall be compacted to 100% MDD after grading shall have a well done paving block finish that can withstand load weight of not less than 80mm , 49N/mm<sup>2</sup>. The road shall also be lined with kerblines and channels and shall be constructed to a fall that will allow proper drainage of the road. The road shall have adequate drainage provided. Deceleration and acceleration lanes will be constructed to paving standards where necessary. The design shall be to road design manuals. The road shall have minimum width of five (5) meters with the alignments allowing for low loader trailers.

### **A-Gravel Access (Gravel Wearing Course – GWC)**

#### **A.1 General**

All access roads will be gravel standard and their alignments will be designed to accommodate construction and future maintenance traffic.

Any damage occasioned by whatsoever cause during construction shall be repaired by spot gravelling, reshaping and re-compaction at the end of contract such that the road to be handed over will be defects free.

#### **A.2 Materials Requirements**

Gravel standard roads comprise of a single layer of selected granular material placed directly on the sub grade to serve as a pavement and as surface-wearing course.

The gravel for the single layer should be of adequate quality to guarantee the following:

**a) General**

In general gravel wearing course materials should comply with the following:

- They should have sufficient cohesion to bind the particles together and prevent the surface from raveling and becoming corrugated in the dry season.
- The amount of fines and plasticity should be limited so as to avoid the occurrence of dusty and slippery conditions in dry during the dry and wet weather respectively.

**b) Grading Requirements:**

Grading curve of the gravel should be within the class 1 envelope (initial daily number of commercial vehicles less than 150) to guarantee good stability. The grading to consider is that obtained after processing and compaction.

| Grading after compaction |                     |          |
|--------------------------|---------------------|----------|
| Sieve Size (mm)          | % passing by weight |          |
|                          | Class 1             | Class 2  |
| 37.5                     | -                   | 100      |
| 28                       | 100                 | 95 – 100 |
| 20                       | 95 – 100            | 85 – 100 |
| 14                       | 80 – 100            | 65 – 100 |
| 10                       | 65 – 100            | 55 – 100 |
| 5                        | 45 – 85             | 35 – 92  |
| 2                        | 30 – 68             | 23 – 77  |
| 1                        | 25 – 56             | 18 – 62  |
| 0.425                    | 18 – 44             | 14 - 50  |
| 0.075                    | 12 - 32             | 10 - 50  |

**c) Plasticity Requirements**

Plasticity index of the gravel should not exceed 15 and shall not be less than 5 in wet areas (annual rainfall greater than 500 mm per year). In dry areas (annual rainfall less than 500 mm per year) maximum plasticity index shall be 30 but subject to a minimum of 10.

**d) Bearing Strength Requirements**

A minimum CBR (after 4 days soak) of 20% at 95% MDD and OMC (Modified AASTO T180) is required

**e) Construction Procedures**

Gravel materials are excessively coarse in their “as dug” state. Appropriate processing is therefore necessary to bring them to the required gradation. This is normally done on the road by using grid, cleat or sheep’s foot rollers. Oversized particles which cannot be broken down to the required size shall be removed.

The minimum thickness of a compacted layer shall not be less than 125 mm.

**A.3 Pavement.**

The single gravel layer should consist of a minimum thickness necessary to avoid excessive compressive strain in the sub grade and to compensate for the expected gravel loss under traffic during the period between re-gravelling.

Where the top 300 mm layer of the formation level embankment or natural ground sub grade has a CBR greater than 5%, the following thicknesses shall be provided:

- Roads within the Switch Yard not subjected to heavy commercial vehicles– The minimum compacted thickness of 125mm.
- Access roads outside the Switch Yard and roads within the Switch Yard likely to be subjected to heavy commercial vehicles during construction and during periodic maintenance. – Provide a 250 mm thick compacted layer.

In addition to the above, where the in situ sub grade or the embankment material has CBR strength of less than 5% then:

- Top 300 mm layer of the fill / embankment shall be made with selected imported material with CBR (after 4 days soak) of between 7 and 13%.
- Where in situ sub grade an improved sub grade 300 mm thick of imported materials with CBR (4 days Soak) of between 7 and 13% shall be laid.

The above thickness shall extend to cover the shoulders. A cross fall of 4% shall be provided.

Compaction will be in layers not thicker than 200 mm and will achieve compacted densities of 95% MDD (Modified AASHTO T180) at compaction moisture contents of between 80% and 105% OMC.

#### **a) Existing Bitumen Standard Access and Internal Roads**

All shall be reinstated to their original standard of materials and construction.

#### **b) Quality Control**

Tests shall be performed by the contractor on soils and gravels undergoing compaction under the supervision of and at frequencies determined by the Project Manager and shall include:

- Determination of the Atterberg Limits in accordance with BS 1377.
- Determination of particle size distribution in accordance with BS 1377.
- Determination of dry density / moisture content relationship in accordance with BS standard compaction and modified AASHTO T180 as appropriate.
- California Bearing ratio (CBR) in accordance with AASHTO T193.
- Field dry density as set out in BS 1377.

#### **4.1.4.2.3 Removal of Top Soil**

The top soil within the areas of platform and shall be stripped to an approximate depth of 200 mm and stockpiled at locations agreed with the Project Manager for later use on embankment slopes.

Overburden in the borrow pit shall also be stripped to a depth specified by the Project Manager and stockpiled for later use in rehabilitation.

#### **4.1.4.2.4 Classification of Materials**

Earthworks shall be under the contractors' scope and considered fully priced by the contractor.

#### **4.1.4.2.5 Order of Work**

The construction of cuttings, side drains and embankments shall proceed in a methodical and orderly manner. It shall be solely the Contractor's responsibility to arrange his methods and programme of work so as to ensure that the earthworks are carried out by the most efficient and economical method possible with the type of plant employed on the Works.

All trimming of cuttings, and embankments, drains and shoulders to the specified slopes and shapes, shall be carried out concurrently with the earthworks that are being carried out at that particular site and level.

#### **4.1.4.2.6 Fill Material**

"Fill-material" shall mean material deposited in accordance with these specifications from any of the classes specified in order to build up an earthworks construction to formation level as shown on the Drawings or as ordered by the Project Manager. The Contractor shall obtain the fill material from a source approved by the Project Manager.

Fill materials will generally be obtained from cuttings. If the material obtained from this source is insufficient or unsuitable extra material shall be obtained from borrow areas. All fill material (other than rock fill in lower layers) shall pass 75mm BS sieve size.

The following materials are generally unsuitable for construction of fills.

- All materials containing more than 5% by weight of organic matter (such as top soil, materials from swamps, plants and vegetable matter)
- All expansive soils such as black cotton soils with swells of more than 3% as measured in the CBR test.
- All clay soils with plasticity index exceeding 50.
- All materials having a moisture content of 105% of the optimum moisture content (standard compaction)

Rock fill can be used provided that boulders greater than 0.2 M<sup>3</sup> in volume or 600 mm in size are not used and that this material is not placed within the top 600 mm to formation level. The best materials from cuttings or borrow areas should be reserved for the upper layers of the fill.

#### **Compaction of fill**

Materials other than rock fill shall be placed in layers of compacted thickness not exceeding 300 mm. Thicker layers can only be permitted where very heavy compacting equipment is available and trial sections have proved that the required compaction will be readily achieved over the layer depth. The minimum layer thickness shall be twice the maximum particle size of the compacted material.

Fill material shall be compacted throughout to a dry density of at least 95% MDD at OMC (standard Compaction AASHTOT99) except the top 300 mm of the fill which shall be compacted to 100% MDD (AASHTO T99).

Where rock fill is used it should be placed in the bottom of the embankment. The largest sizes shall be placed in layers of 1.0 meter thick. The interstices shall then be filled with smaller rocks and approved filler material. The whole layer shall then be compacted until the interstices are completely filled or until the required settlement is obtained. Heavy vibratory rollers are generally the most suitable machines for compacting rock fill.

The specified compaction shall be achieved over the full width of the embankment.

Any area inaccessible to the roller shall be consolidated and compacted using approved mechanical tampers.

#### **Compaction of In situ Sub grades**

After removing the top soil and/or 600 mm of unsuitable /expansive soils and before placing fill, improved sub grade or gravel wearing course, the upper 300 mm of in situ sub grade will be compacted to 100% MDD standard compaction. Compaction in cuts without improved sub grade will likewise be compacted to 100% MDD standard compaction

#### **4.1.4.2.7 Spoil Material**

"Spoil-material" shall mean material excavated in accordance with these specifications from any of the classes specified, and which, being obtained from the excavation of side drains, cuttings or below the road, embankment is unsuitable for the requirements of the Works. Spoil material shall be removed from the Site to a spoil tip which should be to a site acceptable by respective local authorities and shall be approved by the Project Manager.

#### **4.1.4.2.8 Expansive Material**

When expansive material is encountered, it shall be removed to a depth 600 mm below the formation or the existing ground level, whichever is greater. Material removed shall be stockpiled for later use in slope protection or spoiled to a tip as instructed by the Project Manager.

#### **4.1.4.2.9 Surplus Material**

"Surplus-material" shall mean material excavated in accordance with these specifications from any of the classes specified and which is temporarily surplus to the fill requirements and shall be carted to a designated stockpile for re-use later elsewhere in the Works, or to an approved spoil tip.

#### **4.1.4.2.10 Side Drains**

Where side drains are required excavating the lines, slopes and widths as designed by the Contractor and approved by the Project Manager shall shape them. The side drains shall be finished off so that the formation levels and camber or super elevation of the formation, level and cross fall of the shoulders, and shape and invert levels of the side drains are everywhere in accordance with the Drawings.

Any excess depth or width excavated from the side drains shall be backfilled and made good to the satisfaction of the Project Manager at the Contractor's expense.

All other types of drains are specified separately in this Specification.

#### **4.1.4.2.11 Excavation in "Rock"**

a) Excavation Level

Unless otherwise directed, the formation of the platform can be founded on rock. However, rock shall be excavated to an average level 150 mm below the formation and in no place less than 100 mm below the formation.

b) Backfilling for Surfaces

Any excess excavation in rock below the formation shall be backfilled and compacted. Excess excavation in the invert of drains shall not be backfilled, but the rock surfaces shall be trimmed, and all loose particles removed, to allow free drainage of water.

c) Excess Excavation of Slopes

Where side slopes are over-excavated no backfilling will be required but the slopes shall be trimmed to a neat shape and safe angle as is acceptable to the Project Manager. The sloping sides of all cuttings shall be cleared of all rock fragments, which move when prised with a crowbar.

d) Hard Material

The provisions of this Clause do not apply to hard and common materials, which materials shall be excavated to the lines and levels shown on the Drawings or as instructed, within the permitted tolerances.

**4.1.4.2.12 Setting Out and Preparation for Earthworks**

The Contractor shall set out the earthworks and the tops of cuttings and toes of embankments at intervals 10 m. Reference pegs shall be provided clear of the earthworks and at right angles to the centre lines, from which the centre lines and levels can be re-established at any time.

Before the construction of any earthworks in the fills, the levels of the existing ground shall be agreed between the Contractor and the Project Manager. If the Contractor fails to take the requisite levels then the ground levels determined by the Project Manager shall be taken as correct.

**4.1.4.2.13 Construction of Earthworks to Formation**

All earthworks up to formation shall be formed and completed to the correct lines, slopes, widths and levels shown on the Drawings and with the sub grade parallel to and at the correct depth below the profile, camber, cross fall or super elevation shown for the finished level, unless otherwise directed by the Project Manager.

Embankments and fills shall be constructed only of suitable material obtained from the excavation of cuttings. If the Contractor encounters material which he considers unsuitable for earthworks, then he shall forthwith inform the Project Manager, who shall instruct the method of use or disposal of such material. If insufficient material can be obtained from the cuttings, additional material may be borrowed from approved borrow pits.

The Project Manager may direct that certain soils be excluded from certain layers and other soils set apart or obtained from borrow and used only for these layers, in which case the Contractor shall comply with the Employer's or the Project Manager's directions and shall allow in his price for such selection of materials.

#### **4.1.4.2.14 Unsuitable Material Information**

Where, in the opinion of the Project Manager, unsuitable material occurs in cuttings, the Contractor shall excavate it to the depths and widths directed and replace it with selected fill material to form an improved formation.

#### **4.1.4.2.15 Spreading and Compaction of Embankment and Fills**

Embankments and fills shall be laid out and compacted to achieve a stable platform with sufficient bearing capacity and stability.

#### **4.1.4.2.16 Drainage of Works**

All cuttings, embankments and borrow pits shall be kept free of standing water and drained during the whole of the construction.

Should water accumulate on any part of the earthworks, either during construction or after construction, until the end of the maintenance period, giving rise to soaking or eroding conditions in the earthworks, the Project Manager may order the Contractor to remove and replace at the Contractor's expense any material which has been so affected.

All drains shall be maintained throughout the Contract in proper working order.

The Contractor must allow in his price for draining the earthworks satisfactorily at all stages during the construction and arrange his methods and order of working accordingly.

The entire platform shall be adequately drained and all cable trenches including those in switchgear building should be well drained.

#### **4.1.4.2.17 Sub-grade Layer**

During this process the sub grade layer shall be graded to level, parallel to the cross fall or chamber and profile shown on the approved design drawings or directed by the Project Manager and to agreed tolerance.

#### **4.1.4.2.18 Tolerances**

The following tolerances will be permitted in the finish of the formation to roads and platform:

- a) The level of the formation should be within +/- 100 mm of that specified.
- b) On the final trimmed slope of earthworks a variation of + or - one fifth of the specified slope will be allowed.
- c) The tolerances permitted in the overall width of the bottom of cuttings shall be plus or minus 150 mm in the distance between centre lines and the toe of cuttings slopes, and plus 150 mm in the case of embankments.

#### **4.1.4.2.19 Protection of Embankment Slopes**

The top soil and expansive material removed from the Works shall be placed on embankment slopes as directed by the Project Manager. The slopes shall be trimmed to form a gradient not less than 1 on 5 unless otherwise directed.



#### **4.1.4.2.20 Grassing of Slopes**

The surface of embankment slopes, after placing of top soil, shall be planted with grass. Unless instructed otherwise by the Project Manager, the type of grass shall be indigenous. While planting, the area shall be irrigated for as long as necessary to ensure that the grass is properly established and has completely covered the ground. Grass should only be planted in the rainy season.

#### **4.1.4.2.21 Borrow Pits**

Where it is necessary to borrow material for construction, suitable pits shall be provided by the Contractor to the approval of the Project Manager.

All borrow pits must be carefully cross sectioned before and after excavation in order to determine the quality of earth excavated.

After removal of material for use, the area must be rehabilitated by the Contractor so that it will not prove a hazard to man or beast or a source of erosion. The sides of the excavation must first be sloped and then any previously stockpiled top soil spread as far as possible.

At some borrow pit locations, further cleaning and fencing etc., may be required.

#### **4.1.4.2.22 Soil Sterilisation**

In order to stop the growth of vegetation and incidence of ants, the Contractor shall apply an approved herbicide before any spreading of stone over the platform area.

Insecticide to be used around Switchgear building and any other required area

#### **4.1.4.2.23 Earth Electrode**

The Contractor shall install earthing electrodes in trenches as outlined in the Specifications for Earthing in Particular specifications.

#### **4.1.4.2.24 Platform Areas**

The substation platform areas shall be at least 1.5 times the area required by the equipment to be installed.

### **4.1.4.3 MATERIALS FOR THE WORKS**

#### **4.1.4.3.1 General**

All materials shall comply with appropriate local or regional standards unless otherwise required hereinafter. Such standards shall be to the approval of the Project Manager.

The Contractor shall before placing any order for materials or manufactured articles for incorporation in the Civil Works, submit for the approval of the Project Manager the names of the firms from whom he proposes to obtain such materials, etc., together with a list of the materials and manufactured articles giving the origin, quality, weight, strength, description, etc., which he proposes that the firms should

supply. No materials or manufactured articles shall be ordered or obtained from any firm of which the Project Manager shall not have previously approved.

All materials shall be delivered to the site within sufficient period of time before they are required for use in the Works to enable the Project Manager to take such samples as he may wish for testing and approval. Any materials condemned as unsuitable for Works shall be removed from the Site at the Contractor's expense. Contractors price to include these testing of materials.

The Contractor may propose alternative materials to those specified, provided that they are of equivalent quality and, subject to the Employer's or the Project Manager's approval such materials may be used in the Works.

#### **4.1.4.3.2 Standards**

Concrete pipes, porous concrete pipes, cast iron manhole covers and gratings, bricks, concrete kerbs, bituminous surfacing, cement, steel and aggregates shall comply with local or regional standard to be approved by the project manager

#### **4.1.4.3.3 Filter Backfill for Sub-soil Drains**

This shall be graded crushed stone as for platform surfacing (below).

#### **4.1.4.3.4 Stone for Pitching**

Stone for pitching to drains, inlets and outlets of culverts, to embankments and around structures shall consist of sound un-decomposed rock. Precast concrete tiles may also be used.

#### **4.1.4.3.5 Stone for Platform Surfacing**

The stone shall be hard and durable crushed rock with a maximum particle size of 60 mm and not more than 15% shall pass a 9.5 mm sieve.

The stone layer to be spread uniformly over the finished surface of the platform shall have a thickness of 100 mm.

### **4.1.4.4 DRAINAGE AND STORM WATER**

#### **4.1.4.4.1 Drainage**

The Contractor shall provide sub-soil and storm water drainage, including drainage of cable ducts. The drainage system shall be to the approval of the Project Manager.

Drainage shall be in accordance with relevant Codes for Practice published by authoritative Standards organization such as the British Institution, e.g. BS 8301, BS 6031 and CP 2005.

A surface water drainage system covering the entire substation site shall be installed to allow total drainage of the substations. The number of runs and outfalls and pipe sizing must be sufficient to cope with the severest precipitation, with a factor of safety of 1:2 within the substation site and other areas in which maintenance will be carried out. The drainage must allow uninterrupted access.

Embankments and cuttings are to have drainage facilities at their top or bottom. The formation level of the site is to be formed with uniform cross-falls of about 1 in 300 in

the same direction as the natural drainage path of the surrounding environment. Drainage minimum slope shall be 1 in 200.

Surface water from roofs of buildings except the switchgear building shall be drained to down pipes, which connect with the general site drainage system. Surface water from the switchgear building roof shall be drained to the main reservoir tank.

In areas where there is a risk of water runoff the substation shall be protected from failure by means of gabions, retaining walls, and stone pitching or otherwise to the employer's approval.

The contractor shall install precast 600 mm concrete culverts for storm drain with the 200mm thick concrete haunching for the purpose of providing free flow of storm water drain at the substation entrances and or exits. Also 200mm thick reinforced concrete plastered head walls shall be installed.

#### **Foul drainage**

The foul drainage will be connected to a sewage drainage system where applicable or to standard septic tank for 20 persons to be constructed by the contractor. All the necessary authority shall be sought by the contractor prior to connection, and all regulations of the council shall be adhered to.

#### 4.1.4.5 **FENCING**

##### **4.1.4.5.1 Fencing**

The Contractor shall construct fencing along the perimeter of sub-stations, including gates where necessary and shall comply with the requirements of the following Clauses.

All the substation fences shall be of dressed Natural stone. The substations shall have electric fence and razor wire on top of the perimeter wall. The perimeter wall shall have a ground beam and columns at three meter interval. Chain link fence to be used ONLY where specified.

##### **4.1.4.5.2 Dimensions**

|                              |          |
|------------------------------|----------|
| Height of the stone fence:   | 2 700 mm |
| Height of chain link fabric: | 2 000 mm |

##### Chain link Fence (Not Applicable)

Barbed wire: 3 wires above fabric, height of 300 mm, on supporting arms facing outwards from Site at 450 angles.

Maximum distance between posts or columns: 3 000 mm, except where interrupted by gate.

Terminal posts: including end, corner and straining posts; 89 mm outside diameter 114 mm outside diameter at gates.

Embedment lengths of terminal posts:

|   |                            |          |
|---|----------------------------|----------|
| - | Corner and straining posts | 1 100 mm |
| - | End posts                  | 1 200 mm |

- Gate posts 1 400 mm

Tension bars and bands: locate at terminal posts to fix fabric, bottom wire and barbed wire.

Top rail: "extra-strong" pipe, 43 mm outside diameter.

Braces: "extra-strong" pipe, 43 mm outside diameter for attaching end and gate posts to adjoining posts. Use two braces at corner and restraining posts.

Gate width: free distance between 2 gate posts, 1 500 mm for single gate, 5 000 mm double gates.

Double gates: one leaf for normal traffic, other leaf to remain closed by means of drop bolt locking into centre rest, inoperable from exterior.

Gates: able to open in either direction to 90°.

Gate hardware: three hinges, latch with padlock accessible from either side of gate, latch catch.

Top of posts and uprights: weatherproof tops.

#### **4.1.4.5.3 Materials**

Fabric: ASTM A 392, 2 000 mm high, 3.8 mm diameter (No. 9 gauge) steel wire, 50 mm diamond pattern, twisted and barbed finish at top, knuckled wires at bottom, zinc coated.

Pipes: ASTM A 120, steel pile, hot-dipped zinc coated after welding, diameter and weight size as shown on drawings, unthreaded ends, free from burrs.

Fence fittings: ASTM F 626, hot-dipped zinc coated according to ASTM A 123.

Barbed wire: ASTM A 121, 2.51 mm diameter wire in strand (No.12-1/2 gauge), 2 strands with 4-point barbs spaced at 125 mm, Class 3 zinc coating.

Bottom wires: 5 mm (No. 6 gauge) steel wire, 500 g/m<sup>2</sup> zinc coating. This shall be surrounded by a concrete beam (C20) as shown on the drawings.

Fence fittings: ASTM F 626, steel tension bars and bands, nuts and bolts, weather proof tops of commercial aluminium alloy, malleable cast iron, or rolled or pressed steel, cast iron and steel fittings hot-dipped galvanised with 500 g/m<sup>2</sup> according to ASTM A123.

Concrete: 20MPA at 28 days

#### **4.1.4.5.4 Installation**

Install fencing and gates according to ASTM F 567 unless otherwise indicated, and to drawings and this Specification.

Level ground surface so that space between finished ground surface elevation and bottom of fabric does not exceed 50 mm.

Plumb and align posts to within 10 mm.

Install posts of a gate at same elevation regardless of difference in ground level.

Set posts in concrete footings in form of truncated cone, according to ASTM F 567, and as follows:

| FOUNDATIONS<br>(Dimensions) | ORDINARY SOIL |                | SOLID ROCK |                |
|-----------------------------|---------------|----------------|------------|----------------|
|                             | Line Posts    | Terminal Posts | Line Posts | Terminal Posts |
| Depth                       | 1000 mm       | 1600 mm        | 300 mm     | 500 mm         |
| Diameter at top             | 250 mm        | 300 mm         | 150 mm     | 150 mm         |
| Diameter at bottom          | 350 mm        | 400 mm         | 150 mm     | 150 mm         |

Make joints in fabric at terminal posts.

Fasten as follows:

- a) Every 450 mm along top rail, braces and bottom wire;
- b) Every 300 mm on line posts.

Secure barbed wire to terminal and gate posts with tension bands, and to gate uprights with hooks.

Install bottom wire in middle of last line of mesh.

#### 4.1.4.6 CONCRETE AND BUILDING WORKS

##### 4.1.4.6.1 Earthworks

###### Soil Investigations

The contractor shall collect all data he deems necessary for preparation of his bid. The Contractor shall be required to perform sub-soil tests within the area of the switchyard to the depth and by the method of test specified by the Project Manager. The details of performing the test, tools and equipment to be used for, shall be submitted to the Project Manager for approval.

The sub-soil tests shall be carried out by any method as stated hereafter under the supervision of a qualified person, who shall be subject to approval of the Project Manager.

###### Excavation

Excavation for concrete foundations shall be carried out in strict accordance with the requirements of the Project Manager and to fit in with the programme of construction.

###### Shoring and Timbering of Excavation

The Contractor shall be entirely responsible for the safety of all excavations, for the prevention of injury to workmen and for the stability of the faces of the excavation.

The adjacent road surfaces must remain trafficable, and cracking or cave-ins must be avoided. All shoring and timbering shall be done to the approval of the Project Manager, who may order such shoring or timbering to be strengthened or altered if he considers this necessary in the interests of the work or to safeguard against accidents to workmen or cave-ins. For the purpose of measurement the following categories of shoring shall apply:

Dewatering

The whole Works shall be constructed in dry and the Contractor shall be held responsible for keeping all excavations free from water, whatever the source or cause may be, and shall properly deal with and dispose of water by use of sufficient temporary works, plant and appliances so as to ensure that the whole Works is executed in a satisfactory dry and safe manner, and costs for all dewatering operations shall be included in the price for civil works.

Excavation to be approved

In no case shall broken stone for under drainage or concrete be placed in an excavation until the surface on which such materials are to be placed has been approved by the Project Manager.

The Contractor shall advise the Project Manager whenever the bottom of any excavation is ready for inspection or whenever it is necessary to cover up the work. In default of such notice the foundation shall on the order of the Project Manager be uncovered by the Contractor and reinstated without extra charge.

Disposal of Excavated Material

All material excavated under this Contract shall be disposed of in accordance with the instructions issued by the Project Manager. Selected material required for back-filling shall be removed to a tip found by the Contractor and the Contractor shall be responsible for ensuring that the required amount of spoil is set aside.

Other Services

Where trenches pass near or across other services, the Contractor shall take every precaution against damaging such services. These services shall be properly supported in the trench until back-filling is complete and the back-filling shall be thoroughly compacted under and around such services.

Backfilling

Back-filling shall be carried out either with selected spoil as set aside, or with imported selected spoil, or other material to the approval of the Project Manager.

No back-filling shall be done until all the formwork has been removed together with pieces of timber, cement bags, vegetation and or other rubbish.

All back-filling shall be compacted in layers not exceeding 150 mm thick and shall be sprayed with water to bring the moisture content to the optimum for dense compaction.

Compaction shall be to approved standard.

**4.1.4.6.2 CONCRETE, FORMWORK AND REINFORCEMENT**

Material

Aggregates

- a) Shall conform to BS 882.

- b) Shall be heaped separately on hard, self draining surfaces.
- c) Normal size of coarse aggregate shall be 20 mm.

Water

Shall be fit to drink

Reinforcement

Shall conform to BS 4449.

Reinforced Concrete

Shall be designed to BS 8110 ,Foundation BS 8004

Steel

Shall be designed to BS 5950

Cement

shall

- a) Conform to BS 12.
- b) Be either normal Portland or P.C. 15.
- c) Be used within 6 weeks of manufacture.
- d) Be stored in a manner to exclude any moisture.
- e) Be stored in a manner to ensure use of the earliest consignment.
- f) Different types of cement from different manufacturers shall not be mixed for a single cast or structural element.
- g) If concrete is to be exposed Item 4.f to apply for whole project.

Additives shall not be used

Before concreting

Design Mixes

Not less than 2 weeks before the start of concrete work, the Contractor shall submit to the Project Manager for his approval a statement of proposed mix proportions for the various grades required in the project. (Note: the grade is the characteristic strength or the cube strength below which not more than 5% of the result may be expected to fall when tested at 28 days).

The statement shall include proportions of cement, fine and coarse aggregate, and water, the maximum and minimum slump and the target strength for each grade.

A certificate by recognised laboratory that the proposed mix will meet the requirements must accompany the statement.

The proportions stated may not later be altered without the written approval of the Project Manager.

Cost of mix designs to be borne by the Contractor.

### Formwork

Formwork shall be sufficient to leave the concrete finishes specified on drawings and to be within the tolerances specified in the following table and to provide an acceptable surface for applied finished, where required.

|                       |                                   |
|-----------------------|-----------------------------------|
| Line and Level        | 1 mm per metre not exceeding 5 mm |
| Pockets, Sleeves etc. | +/- 5 mm                          |
| Bases                 | +/- 50 mm                         |

The concrete shall have a smooth finish free of projections, voids, etc. The type of ties to be used shall be such that the required finish is achieved and does not become marred by subsequent corrosion. Ties to be set out to definite pattern to the Employer's or the Project Manager's approval. Rubbing down is allowed only after the Employer's or the Project Manager's approval of the surface to be treated.

### Reinforcement

Shall not be heated or re-bent without the Employer's or the Project Manager's permission.

Shall be free from any material likely to impair bond or initiate corrosion.

Shall be bent and fixed according to the Project Manager bending schedules.

Shall be tied with soft iron wire.

Shall be supported to maintain the following minimum cover during concreting.

- a) The greater of the diameter of the bar or 40 mm for external un-plastered face.
- b) The greater diameter of the bar or 15 mm for internal face.

Shall be inspected by the Project Manager.

**NOTE:** Holding down bolts shall be supplied under the civil works part or by the main contractor if he so decides, and in any case be included in the turnkey price.

### Construction Joints

Shall be avoided if possible, but if inevitable shall be pre-planned in consultation with the Project Manager and temporary stop ends inserted. Before placing of concrete against a construction joint, the formed face shall be hacked down to expose the coarse aggregate, kept continuously wet for 24 hours. Vertical faces should be covered with cement/water slurry and horizontal faces should be covered with 15 mm layer of cement/sand grout. New concrete should then be placed immediately.

### Camber

To formwork shall not be at the expense of the overall depth of the concrete.

### Weather

Concrete shall not be placed if temperatures above 30 degrees Celsius or below 0 degrees Celsius are expected during concreting



Batching

shall

- a) Be by mass in accurately calibrated scales or be volume in soundly constructed gauge boxes making due allowance for bulking of the fine aggregate.
- b) Be in proportion to whole sacks of cement.

Mixing

shall

- a) Be in a machine in good condition, large enough to carry the whole mix, controlled by a competent experienced operator.
- b) Be for sufficient time to ensure complete mixing of the ingredients.

Placing

shall

- a) Be under the control of a competent, experienced overseer.
- b) Be in a manner to prevent separation of the ingredients.
- c) Be a continuous process until the pour is complete.

Compaction

- a) Shall be by immersion (poker) vibrator in the hands of experienced operators.
- b) Concrete shall not be moved by vibrator.
- c) Shall be sufficient to remove all air pockets and honey-combing and to ensure complete dense concrete cover to all reinforcement.

Testing

- a) Making of concrete cubes by Contractor under Project Manager's supervision. Contractor shall arrange for transport of cubes to approved testing laboratories. Cubes to be in sets of 3.

Curing

- a) Shall commence early on the morning following the placing of the concrete.
- b) Shall be effected by keeping the concrete in a permanently wet state.
- c) Membranes shall not be used.
- d) Shall continue for a minimum of seven (7) days or such longer time as may be required by the Project Manager.

Stripping of Formwork

- a) To soffits shall not be struck until 7 days after placing of concrete (but see below for (props)).
- b) To vertical faces shall not be struck until 14 days after placing concrete.
- c) Props to soffits shall not be struck until 14 days after placing concrete.
- d) Shall not be stripped without the Employer's or the Project Manager's approval who has the power to vary the above items.

#### Patching

- a) To defective work shall not be undertaken before the item has been shown to the Project Manager.
- b) Is a sign of poor workmanship. The Project Manager shall have the right to reject the complete element if an unreasonable amount of patching has to be done, or if patching will spoil the appearance of the finished concrete.

#### Records

Are to be kept by the Contractor, showing date and time of each concrete pour, the weather conditions, the temperature, the number of the cubes which represent the concrete, the slump and any other items which the Contractor and/or the Project Manager consider relevant. These records are to be made available for the Project Manager inspection when required.

### **FOUNDATIONS**

Foundations to Transformers and for circuit breakers, switches and insulators pedestals shall be at a depth not less than 1200 mm from the existing ground level. Transformer foundation shall allow for oil collection pit and an oil interceptor. Firewall shall be reinforced concrete. The transformer pedestal to cover the entire mounting of the transformer base. All foundations to be base and pedestal type.

### **Cable Ducts and Trenches**

The Contractor is responsible for all civil engineering works required for the cable runs between switchgear and buildings, in reinforced concrete cable trenches. Cable entries into buildings and road crossings shall be through 150 mm diameter heavy gauge ducts or in reinforced concrete cable trenches. Two (2) lines of 150 mm diameter heavy gauge of spare ducts shall be provided. Trench covers inside the building will be of 6mm thick Metal Chequer plates reinforced with 25x25x4mm angle iron welded underneath along the edges and across 'X' formation and with facilities for easy handling on removal, except in areas where heavy traffic is expected where covers will be of concrete finished with terrazzo to match the floor finish. Trench covers outside buildings shall be of reinforced concrete, designed for the maximum likely imposed loads appropriate to their location. The covers to have steel angle line all round. The trenches and ducts shall be silt proof to prevent silt and debris from entry. The trenches shall be raised to a level that keeps away storm water from flowing in. The trench covers will be constructed such as to allow easy access to the trench by means of handles or otherwise installed for every fourth slab. Concrete cable trenches shall be adequately drained to soak pits of adequate capacity or shall be connected to the general drainage system such that they will remain as dry as possible. The trench covers will be fitted into grooved sides of the trench walls for a flush top of trench and covers. Where the cable trench is crossing roads the ducts shall be constructed in such way that they will be able to withstand the weight imposed on them.

Power cables and control cables shall be laid on suitable galvanized cable racks and cable trays and in separate trenches. Cable entries into buildings shall be sealed to prevent the entry of dust, vermin water, etc., using suitable materials. All cable trenches shall be reinforced concrete.

#### **4.1.4.6.3 BUILDER'S WORK**

### Setting out Walling

The Contractor shall provide proper setting out rods and set out all work on the same for courses, openings, heights, etc. and shall build the walls and piers, etc. to the widths, depths and heights indicated on the drawings and as directed and approved by the Project Manager.

### Materials

a) Cement

Cement shall be as described in concrete Works, Part 6B.

b) Fine Aggregates

Fine aggregates for concrete blocks shall be as described for fine aggregate in Concrete Works.

c) Coarse Aggregate

Coarse aggregate for concrete blocks shall be good, hard, clean aggregates from an approved quarry. It shall be free from all de-composted materials and shall be graded up to 7 mm, and all as described for coarse aggregate, Concrete Works.

d) Machine cut stone.

This shall be to approval of project manager and meet minimum required specifications.

### Concrete Blocks

Concrete blocks for walling shall be provided by the Contractor complying with B.S. 6073, and made in approved block manufacturing machines.

Minimum thickness of blocks in external walls shall be 150 mm, and in internal walls the thickness shall be minimum 100 mm.

Blocks in external walls shall be hollow type. The volume of the cavities shall be not more than 50 % of the gross volume, and the dimensions of the cavities arranged so that each cavity is vertically continuous when the blocks are bonded. Blocks in internal walls shall be of the solid type. Samples of the proposed block types shall be approved by the Project Manager before any walling work is commenced.

Blocks shall be cast under sheds in suitable block manufacturing machines either power driven or hand operated. The form shall be of steel, and accurately made to size to give the required shape and squareness of block. The concrete shall be vibrated during casting to achieve a dense and uniform concrete. The material shall contain only sufficient water to obtain full chemical reaction of the cement and to give proper workability of the constituents.

The ratio of combined aggregate to cement shall not exceed 3:1. The Contractor shall present his proposal for mix recipe supported by test results for the Project Manager's approval.

Concrete shall have minimum 28 days strength of 20 N/mm<sup>2</sup> in accordance with B.S. 1881. Mixing shall take place in mechanical mixers so as to thoroughly mix the constituents to a uniform consistency before casting.

On removal from the machine the blocks shall be carefully deposited on edge on boarding or a clean concrete floor under sheds so as to prevent drying out by the sun for 3 days. During this time blocks shall be kept constantly damp. The blocks may then be laid on edge in the open and kept damp by spraying or covering with

wet hessian or by other means for a further 5 days. The blocks may then be stacked if required, but not more than one metre high, and in such a way as to prevent damage to the edges and corners.

No blocks may be used in building or be transported to site before having reached required 28 days strength criterion. All concrete blocks shall be of even texture and properly mixed ingredients and all portions of the block shall be properly set and hardened concrete.

Blocks shall be free from cracks or blemishes and shall be true to shape and size with clean sharp edges and corners and with corners truly square. Damaged blocks shall immediately be removed from the site. No dimension of a block shall deviate individually by more than 3 mm from the correct size. The average length, width and height of a sample of 15 blocks should neither be longer nor less than 2 mm than the correct size.

Dressed natural stone blocks at least 200mm width may be used as alternative to the concrete blocks.

#### Cement Mortar

The cement mortar is to be mixed in the proportions of 1 Cement, 4 Sand, and thoroughly incorporated with a sufficiency of water. Any cement mortar which has been left for more than one hour shall not be used in the Works.

#### Building Walling

All blockwork shall be laid in raking stretcher bond solidly bedded, jointed and flushed up in mortar. Where wall faces are to be plastered the joints shall be raked out to form a key. The blocks shall be thoroughly wetted for at least 24 hour before laying. Walls shall be carried up evenly course by course. During laying an open joint not less than 15 mm wide shall be left between the ends of all concrete lintels, whether pre-cast or cast in-situ and the blocks adjacent to these ends. These open joints shall be left as long as possible during construction and not filled until plastering or other works render such filling necessary. All such joints shall be properly filled in before the completion of the work. External walls shall be reinforced with two 8 mm high yield steel bars in every third horizontal mortar joint. The building shall be designed as a framed structure.

Blockwork which is not to be rendered or plastered shall be finished with a fair face and the blocks shall be selected for even texture and unmarked faces, regular shape and square unbroken arrisses. The blockwork shall be pointed as the work proceeds with a neat joint. Where blockwork is to be rendered or plastered the joint shall be raked out 10 mm deep as the work proceeds to form an adequate key.

Galvanised steel ties with fishtailed end cast into the concrete spaced at alternate courses and extending not less than 150 mm into the block joints. All mortar joints are not to exceed 15 mm or less than 12 mm.

#### Lintels

Concrete lintels shall be used for all openings and shall be reinforced with two 12 mm high yield steel bars. Lintels shall have a minimum bearing of 500 mm at the ends.

#### Structural Steelworks Switchgear building

Structural steelwork shall be shop-fabricated from structural shapes of medium grade carbon steel in suitable lengths for easy transport and erection. The structural members shall be jointed or fixed on site by bolting or welding. Site welds should be minimised. Design shall comply to BS 5950.

All workmanship and fabrication shall be in accordance with the best practice and shall generally comply with the requirements of B.S. 449. The greatest accuracy shall be observed to ensure that all parts fit together correctly on erection within the tolerances stated in this section. Steelworks shall include all materials, bolts and attachments, cleats, brackets, gussets, etc.

Where required in the Contract, the Contractor shall design the steelwork to comply with the information given on the Contract Drawings. Loading and factors of safety shall comply with relevant codes and regulations. Shop drawings shall be prepared using welding symbols to B.S. 499 where appropriate. design calculations and shop drawings must be submitted to the Project Manager for his approval prior to fabrication of members. The approval of shop drawings and calculations by the Project Manager shall not relieve the Contractor of the full responsibility for any discrepancies, errors, omissions or failure arising therefrom.

All steelwork shall be transported, handled, stored on Site and erected so that members are not damaged or subjected to excessive stresses. Fabrication and erection shall comply with B.S. 5950 Part 2.

#### Roofing

Materials, accessories and fixings shall be ordered from an approved supplier and the Contractor shall as and when required by the Project Manager, submit and deliver samples of nay materials for inspection and testing. Roof trusses shall be in steel.

Roof sheeting shall be hot dip galvanised troughed mild steel sheeting and shall be of minimum thickness 0.5 mm. The sheeting shall have approved plastic coating on face side. Type and brand of such sheeting shall be proposed by the Contractor with his Tender together with supporting specifications. Insulation sheeting will be laid before installation of roofing sheets.

The sheets shall be laid with 200 mm end laps and double corrugation side laps away from the prevailing wind. The sheets shall be fixed to lightgauge steel purlins with galvanised coach screws and seating washers.

Holes for screws shall be carefully drilled in the ridges of the corrugations. Great care shall be exercised to avoid damage and disfiguration to the surface coating of the sheets. At eaves and exposed edges the corrugations shall be closed with purpose made corrugation closers.

Maximum load acting on the building in accordance with local or regional standards.

#### Switchgear building - ceiling

The switchgear building is to have ceilings consisting of fore-manufactured sheets, mounted on steel grids jointed to roof structures. The ceiling shall be fireproof.

#### Roof Drainage

Gutters and down pipes shall, unless otherwise shown on the drawings, be approved plastic coated steel or heavy gauge PVC of diameters 200 mm and 150 mm respectively. One down pipe shall be provided for approximately every 50 m<sup>2</sup> roof area.

Joints shall be lapped 150 mm in the direction of the flow and soldered. Slip joints shall be provided to allow for expansion. All hangers, brackets, and fastenings should be of the same metal as the gutter or of compatible materials. Gutters and

down pipes including supports shall be designed for a concentrated load of 100 kg. Screens or strainers shall be provided to prevent debris from clogging the down pipes.

#### Metalwork

Unless otherwise specified, metalwork shall be carried out in accordance with the provision of B.S. 5950 and other relevant BSI standards.

All steel shall unless otherwise specified, be hot dip galvanised.

Prior to fabrication the Contractor shall submit shop drawings to the Project Manager for approval.

#### Metal Doors

##### a) General

Metal doors shall be supplied by approved manufacturers.

All doors shall be painted as specified under Painting and Decorating. All locks shall be master-keyed with three master keys supplied in addition to three regular keys for each door or gate.

Doors shall be measured by the number of doors of specified dimensions. The rate shall include all supplies, site works, painting and hardware.

##### b) Doors

Door frames shall be pressed steel frames made from minimum 2 mm thick steel sheeting and reinforced where door closers are fixed.

Thresholds shall be made from rolled steel sheeting approximately 100 mm wide and 12 mm high.

Door shall be filled with mineral wool acoustic insulation and lined both sides with steel sheeting minimum 1.25 mm thick. Total thickness of door shall be 45-55 mm.

All doors shall have fire rating Class A 30.

Placing of doors in accordance with Switchgear building drawing.

Internal door frames are to be built to walls truly vertical and square with six ties per frame.

External door frames are to be built in to walls truly vertical and square with eight/ten ties per frame.

All door frames are to be from an approved manufacturer and illustrated in the Manufacturer's Catalogue.

Door frames are to be complete with 100 mm, loose pin steel hinges welded in position and adjustable striking plate.

Frames shall generally be built-in during construction of the walls and securely fixed. A gap shall be left between the top of the frame and the soffit of the lintel during construction. Frames shall be adequately strutted to prevent distortion and shall be protected from damage during other work.

Door frames and similar components shall be fixed with countersunk screws or bolts with heads set into the frames.

Walls shall be built as close as possible to the frames and the gap filled solid with mortar at each course. Render shall be neatly brought up to the frame and well tamped into any remaining cavities. The junctions between window frames or external door frames and external finish or blockwork shall be caulked tight with approved mastic or mortar wherever required, and neatly pointed. Mastic so used shall have long-term resistance against weather, insects and ultra-violet light.

Doors wider than 800 mm shall have three 100 mm hinges. Other doors may have two hinges except where specified or detailed otherwise.

Door stops shall be fitted by screwed fixings where necessary.

#### Aluminium or Steel Windows

Unless otherwise indicated windows shall consist of aluminium subframe with clear glass. Windows shall be from an approved supplier and the details thereof shall be approved by the Project Manager. Windows shall be operable and provided with corrosion resistant metal insect screens or as directed by the Project Manager.

Frames shall generally be built-in during construction of the walls and securely fixed.

Placing of windows in accordance with Switchgear building drawings. Windows are to be built in to walls truly vertical square with six ties per frame.

All aluminium or steel windows are to be from an approved manufacturer and illustrated in the Manufacturer's Catalogue.

Windows are to be fitted complete with casement fastening, stays etc.  
All windows shall have approved burglar bars, and approved means of opening/locking.

#### Door and Window Furniture

Ironmongery shall be strongly made, well finished, good quality "stock pattern" articles. Ironmongery for windows and doors shall be galvanised or other approved manufacture for external use. Samples of all items shall be submitted to the Project Manager for approval before they are used for the Works.

All doors shall be lockable. External doors shall have approved security locks.

Three keys for each lock, clearly labelled, shall be handed over to the Project Manager and all ironmongery shall be cleaned, oiled, adjusted and left in perfect working order.

Emergency doors shall be provided accordingly as per the safety requirements.

#### MV Switch-gear Room

Openings for pressure release

In the MV switch-gear room it is necessary to arrange for openings for pressure release in case of explosion in one of the switch-gears.

To avoid damage in the room/building any pressure shall be released through the openings as described.

Location of these openings must be beneath the ceiling on both longitudinal walls in the switch-gear room. The Contractor must calculate number and size of this pressure openings, and submit his proposal for approval.

Switchgear building

SCHEDULE OF MATERIALS AND FINISH

| ROOM             | FLOOR     | WALLS                   | CEILING                    | REMARKS/NOTES |
|------------------|-----------|-------------------------|----------------------------|---------------|
| 11 kV<br>sw.gear | Terrazzo/ | Plastering/<br>painting | Sheet/plate-fire resistant |               |

NOTES:

Sheets for ceilings = prefabricated/-manufactured colour and type in accordion with approval of the employer.

Switchgear building: External/internal colour in accordance with approval of the employer.

**4.1.4.6.4 PLASTER AND FLOOR COVERINGS**

Materials

Cement and water to be as before described. The sand to be screened through a sieve of 10 to 15 and meshes to 1 cm and to be washed if directed.

Mixing

All materials for mixing are to be used in proper gauge boxes and they are to be strike measured and not tamped down in boxes. Proper non-absorbent stages are to be used for mixing and storing mortar. No foreign matter must be mixed with the mortar.

The materials are to be mixed dry before adding water through a fine hose spray. No cement mortar which has taken its initial set will be allowed to be used.

Plaster Thickness

Unless otherwise specified all wall plasters should not be less than 13 mm thick and not more than 19 mm thick.

Cement Plaster

Cement plaster for external use to be composed of one part cement to four parts sand and for internal use to be one part cement to five parts sand.

Form Key

Rake out joints and roughen if necessary to form key for plaster.

For concrete surfaces, hack and apply 1:1 cement sand slush to form key. Continuously wet for 7 days and then apply plaster.

All brickwork and concrete works should be brushed down to remove dust and any other loose material.

Wetting

All internal and external brick or concrete surfaces are to be wetted well before plastering.



All cement plaster must be kept wet for at least 7 days.

#### Repairing Defects

All defective plaster, cracks, hollows, etc., are to be cut out to a rectangular shape, the edges undercut to form a dovetail key and to be made good to finish flush with the edge of the surrounding plasterwork.

All patches will be to the approval of the Project Manager and if the defects can not be made good satisfactorily then the whole surface is to be removed and re-plastered at the Contractor's expense.

### **4.1.4.6.5 GLAZING AND PAINTING**

#### Glass

All glass is to be of approved manufacture, free from bubbles, waviness, scratches or other imperfections and is to be well bedded, puttied and backputtied and secured with glazing pins or clips in steel sashes or with sprigs in wood sashes.

All glass shall be carefully cut to the required sizes so that all panes of figured or textured glass are uniform in appearance with the pattern parallel to the edges and wired glass shall be so cut that the wires are parallel to the edges.  
The window glass for switchgear room shall be shatterproof type.

#### Putty

Putty for glazing to steel sashes is to be of approved proprietary brand.. Rebates are to be thoroughly back puttied before glazing and all putty is to be carefully trimmed and cleaned off so that back putty finishes level with the top of sections internally, external putty covers sight lines exactly and finished straight and true. Rough surfaces to putty will not be allowed and any defective putty will be cut out and replaced at the Contractor's expense.

Rebates of wood sashes are to be given one coat of priming immediately before glazing.

#### Mirrors

Glass mirrors are to be of the thickness specified, of selected quality glass, silvered on back, with protective sealing coat and arrised edges, unless otherwise described.

#### Generally

Allow for removing and replacing all cracked, broken or defective glass and leave thoroughly clean and perfect at completion.

#### Materials for Decoration

All paints, primers, varnishes, emulsions, stopping, etc., to be of approved manufacture.

The contractor is to use proprietary ready mixed paints obtained from an approved supplier.

When a coat of proprietary paint is applied, the manufacturer's priming and previous coats suitable for the particular type are to be used.

All materials must be brought on to the site in unopened tins, and no dilution or adulteration will be permitted, unless approved by the Project Manager.

#### Emulsion Paint

Emulsion paint shall be PVA (Polyvinyl Acetate) alkali-resisting formulated with high washability and capable of resisting a 8000 scrub test. The first coat to be specially formulated base coat for direct application to the specified surface.

#### Fillers

Higher grade cellulose fillers are to be used internally and premixed filler to be used externally.

#### High Gloss Paints

Primers for application to bare metal to be red oxide primer for iron and steel. For galvanised metal to be an approved zinc chromate or galvanised iron primer. For application on wood or plaster etc., to be an approved alkali primer.

#### Finish enamels

Finish enamels to be synthetic enamel high capacity paint with high coverage and high gloss finish unless otherwise described.

#### Workmanship

All surfaces are to be free from moisture, dust, grease and dirt and rubbed down smooth according to approved practice.

All plaster to be free from efflorescence and treated with one coat of petrifying liquid, approved sealer or alkali primer if required. Hardwall plaster to be glass papered before decorating.

Rectifying defects to decorated surfaces due to dampness, efflorescence, chemical reaction, etc., will be to the Contractor's account, as these surfaces must be checked and the appropriate precautions taken before applying the decoration.

Metalwork must be scraped free of rust, primed as described and finished as later specified.

Galvanised sheet iron, pipes, etc., are to be cleaned down to remove manufacturer's ammoniated dichromate protective covering, primed as described and finished as later specified.

Coated pipes are to be cleaned down, stopped and primed with one coat of aluminium primer and finished as later specified.

All knots in woodwork to be treated to prevent bleeding. Large or loose knots to be cut out and be replaced with sound wood, or cut back and filled. Small knots to be treated with two thin coats of Shellac in methylated spirits. Woodwork to be glass papered to a smooth surface with all sharp arrises removed, all cracks, crevices, holes, etc., to be scraped out, primed as described and stopped with hard stopping, faced up and rubbed down to an even surface and finished as later specified.

All metal and woodwork to have the specified number of coats in addition to the priming coat.

Every coat of paint must be a good covering coat and must dry hard and be well rubbed down to a smooth surface before the next coat is applied, otherwise the Contractor will be required to apply extra coats at his own expense.

Each coat of paint to be of a distinctive colour: sample colours are to be prepared for the final coat which is to be an approved colour scheme and must not be applied without the permission of the Project Manager. After undercoats are on, the painter shall check all work and grainfill as necessary with filler as described.

**NOTE:**

- a) All paints specified are to be obtained from an approved manufacturer and used in strict accordance with their instructions. Their representative will check the paints being used and the method of application and will advise accordingly.
- b) This section of the work to be carried out by an approved firm of decorators who must allow for the very best finish possible and of the highest quality obtainable.
- c) The prices must allow for the removal and refitting of all beads, fittings, fastenings, ironmongery, etc., removed for decoration purposes to be carried out by skilled tradesmen of the appropriate trade.

**4.1.4.6.6 SUBSTATION BUILDING SIZES.**

Proposed substation control buildings should be in conformity with relevant building codes with regard to room size and safety. The building must meet the requirements described in the scope of work and take into consideration future expansion. Specific requirements of the building are described in clause **4.1.4.1.3**

**4.1.4.6.7 IRONMONGERY AND METALWORK**

General

All ironmongery shall be of the best respective types required and no alternative articles will be accepted unless approved. Articles described as brass must be solid brass and not brass finish. Chromium plated articles must be plated satin finish on solid brass or other approved metal.

Where items for ironmongery are required to be fitted to steel door frames, etc., the Contractor must ensure that the Manufacture makes provisions for the correct fitting or lock striking plates, hinges, cleat holes, bolt keeps, etc.

Locks and Keys

Locks are to be two levers unless otherwise described. All locks are to be provided with two keys which must be handed over to the owner on completion of the Works with identification labels attached.

Steel

Steelwork for general building construction is to be of approved manufacture complying generally with the appropriate British Standards and free from all defects, oil, dirt, loose rust, scale or other deleterious matter.

**4.1.4.6.8 ELECTRICAL INSTALLATION**

Scope of Works

This section of the specification relates to the supply, installation, testing and commissioning of the complete electrical services within the switchgear building, including:

1. LV Switchgear
2. Lighting
3. Small Power

The switchgear building consists of a switchgear room.

The Employer reserves the right to reject any of the contractor suppliers if he feels the product does not meet with the contract specification.

#### Electrical Services General Description

The complete electrical installation shall comply with all local standards and rates.

Should there be any conflict between local standards and what has been specified the sub-contractor should draw it to the attention of the Project Manager.

#### Lighting

- a. Luminaries shall be fluorescent lamps except for the toilets and outdoor lighting (except switchyard and perimeter lighting) where GLS lamps can be utilised. In switchgear room: 250 lux is required. In offices 500 lux is required.
- b. All luminaries shall be supplied, installed and tested by the electrical sub-contractor.
- c. All metal work on the luminaries shall be connected to an insulated earth protective conductor.
- d. Lighting Control Switches
- e. Outdoor lighting shall be controlled from an automatic photo cell.
- f. Lighting control switches shall be flush pattern with white finished plates.
- g. Grid switches shall have 5 or 10 amp rating, generally where fluorescent discharge luminaries are controlled switches have 10 amp rating where as with low energy PL lamp, 5 amp switches shall be installed.
- h. Provide emergency lights both inside and outside the building on each side.
- i. Provide security lights with solar backup system.

#### Socket Outlets and Accessories

Reference should be made to the Standards given above for details on the socket outlets and accessories.

Socket outlets to be mounted at 300 mm above floor level.

Conduit cast into the building structure shall be of the heavy duty PVC type. PVC conduits shall not be fixed to the surface of the structure.

#### AC Installation

The Contractor shall supply and install three number AC units including wiring and insulator for the unit.

#### Fire Safety Facilities

Portable fire extinguishers shall be provided under this Contract. Portable, wall mounted, hand held extinguishers shall be 5.5kg pressurized control discharge BCF units. The number of units within the Substation shall be a minimum of 6 Number.

The body of the extinguisher shall be seamless, welded and brazed as appropriate.

The extinguisher shall be capable of being released by means of a lever-operated valve provided with a safety pin.

Extinguishers shall be capable of controlled partial discharge.

The type shall be of that recharge unit that is locally available.

The extinguishers shall be wall mounted and attached and located in a manner affording quick release from the supporting bracket. They shall be installed so that the top of the extinguisher is not more than 1.5 meters above the floor. In no case shall the clearance between the bottom of the extinguisher and the floor be less than 0.1 meter. The extinguishers shall be positioned so that the instructions for operation face outwards.

The building shall also be fitted with fire and smoke detection system. The contractor to train the local staff on use of the installed system. The system shall be monitored from remote and regional control centre.

**Nb all steel supporting structures for equipment to be tubular except the gantry**

**SECTION - VI**

**PARTICULAR TECHNICAL SPECIFICATIONS  
Cables**

## TABLE OF CONTENTS

|            |  |     |
|------------|--|-----|
| 4.1.5      | <i>Particular technical specifications – 66, 33 AND 11 kV Cables</i> ..... | 111 |
| 4.1.5.1    | Cables .....   | 111 |
| 4.1.5.1.1  | General .....  | 111 |
| 4.1.5.1.2  | Conductors .....   | 111 |
| 4.1.5.1.3  | Cable .....  | 111 |
| 4.1.5.1.4  | Testing .....  | 112 |
| 4.1.5.1.5  | Sealing and drumming .....   | 112 |
| 4.1.5.1.6  | Current carrying Capacity and Design Parameters .....                      | 112 |
| 4.1.5.1.7  | Terminations .....   | 112 |
| 4.1.5.1.8  | Heat Shrink Materials .....  | 112 |
| 4.1.5.2    | Installation .....   | 113 |
| 4.1.5.2.1  | General .....  | 113 |
| 4.1.5.2.2  | Cable Marker .....   | 113 |
| 4.1.5.3    | Excavation of Trenches .....   | 114 |
| 4.1.5.3.1  | Joint Holes .....  | 114 |
| 4.1.5.3.2  | Backfilling of Trenches .....  | 114 |
| 4.1.5.4    | Pavement Reinstating.....  | 114 |
| 4.1.5.5    | Ducts .....  | 114 |
| 4.1.5.6    | Direct Burial .....  | 115 |
| 4.1.5.7    | Galleries .....  | 116 |
| 4.1.5.8    | Parallel Separation .....  | 116 |
| 4.1.5.8.1  | Low Voltage Cables.....  | 116 |
| 4.1.5.8.2  | Medium Voltage Cables .....  | 116 |
| 4.1.5.8.3  | Telecommunication Cables .....   | 116 |
| 4.1.5.8.4  | Water Steam etc.....   | 116 |
| 4.1.5.8.5  | Oil Pipe Lines .....   | 116 |
| 4.1.5.8.6  | Sewers .....   | 116 |
| 4.1.5.8.7  | Fuel Storage Tanks .....   | 116 |
| 4.1.5.8.8  | Foundations of Other Services .....  | 117 |
| 4.1.5.9    | Crossing of Roads and Railroad Tracks .....                                | 117 |
| 4.1.5.9.1  | Public Roads .....   | 117 |
| 4.1.5.9.2  | Railroad tracks .....  | 117 |
| 4.1.5.10   | Crossing Other Services.....   | 117 |
| 4.1.5.10.1 | Low Voltage Cables.....  | 117 |
| 4.1.5.10.2 | Medium Voltage Cables .....  | 117 |
| 4.1.5.10.3 | Telecommunication Wires .....  | 117 |
| 4.1.5.10.4 | Water Steam etc.....   | 118 |
| 4.1.5.10.5 | Gas.....   | 118 |
| 4.1.5.10.6 | Sewers .....   | 118 |
| 4.1.5.10.7 | Fuel Depots .....  | 118 |
| 4.1.5.11   | Transporting Cable Drums.....  | 118 |
| 4.1.5.12   | Laying of the Cable.....   | 119 |
| 4.1.5.13   | Mechanical Protection .....  | 119 |
| 4.1.5.14   | Warning Signs .....  | 119 |
| 4.1.5.14.1 | Identification .....   | 119 |

## **4.1.5 Particular technical specifications – 66, 33 AND 11 kV Cables**

### **4.1.5.1 Cables**

#### **4.1.5.1.1 General**

All cables accessories and materials shall be in accordance with the latest editions (including all amendments) of IEC and ISO recommendations.

All cables shall be suitable for operation:

- on a system with direct earthing of the transformer neutral
- under maximum load (ONAF conditions) plus 10 % specified for respective transformers
- in the climatic conditions prevailing at site

No joints shall be allowed. Only dry vulcanising processes shall be used. Special precautions shall be taken to avoid ingress and spreading of moisture and development of water-treeing. The Tenderers shall document the construction measures used to achieve these requirements.

#### **4.1.5.1.2 Conductors**

All conductors shall be stranded copper or aluminium. The conductor shall be clean, uniform in size, shape and quality, smooth and free from scale, splits, sharp edges and other harmful defects. The conductor shall be in accordance with IEC 60228. The conductor shall be filled with swelling powder to stop axial ingress of moisture.

#### **4.1.5.1.3 Cable**

The conductor shall be covered with:

- An extruded semi-conducting layer
- A layer of dry vulcanised cross-linked polyethylene (XLPE) insulation
- An extruded strippable semi-conducting layer
- A water tight copper or aluminium seal
- A layer of swelling tape to prevent axial ingress of water along the screen
- A layer of earthing screen of stranded aluminium or copper
- An outer LDPE (low density polyethylene) sheath for water tightness and mechanical protection.

##### *4.1.5.1.3.1 Laying-up and Fillers of Three Phase Cables*

The cores of three-phase cable shall be laid-up together with suitable fillers, wormed circular and binding tapes applied overall

##### *4.1.5.1.3.2 Manufacturer's Identification*

The manufacturer's identification shall be provided throughout the length of the cables by means of a tape under the sheath printed with the manufacturer's name and ``Property of KPLC``. Alternatively the identification may be embossed on the outer PVC sheet together with identification and voltage markings

##### *4.1.5.1.3.3 Armour*

All cables shall be armoured according to approved manner



#### **4.1.5.1.4 Testing**

Notwithstanding that cables are manufactured to approved standards all cables, accessories and materials shall be subjected to and withstand satisfactorily the test requirements detailed in this specification. All materials shall withstand such routine tests as are customary in the manufacture of the cables and accessories included in the Contract. The manufacturer shall have established a quality control system based on regularly accelerated test of production samples according to CENELEC HD605. This system shall be described in the Bid.

#### **4.1.5.1.5 Sealing and drumming**

The cable shall be wound on strong drums arranged to take a round spindle of a section adequate to support the loaded cable drum during installation and handling. The drums shall be lagged with closely fitting battens that shall be securely fixed to prevent damage to the cable. Wooden drums shall be constructed of seasoned timber to prevent shrinkage of drums during shipment and subsequent storage at site. Each drum shall be clearly marked including indication of direction of rolling.

The ends of the cables shall be suitable sealed to prevent ingress of moisture. The end of the cable left projecting from the drum shall be securely protected against damage by mishandling during transport and storage.

#### **4.1.5.1.6 Current carrying Capacity and Design Parameters**

The maximum continuous current carrying capacity and maximum permissible continuous conductor temperature, and the factors for determining such rating and temperature shall be based on recommendations found in IEC 60287, subsequent amendments and all conditions prevailing on the Site

#### **4.1.5.1.7 Terminations**

Detailed drawings showing the types of cable sealing ends, terminal arrangements shall be submitted to the Project Manager for approval. Stress cones or other approved means shall be provided for grading the voltage stress on the core insulation of the cables.

The terminations for the cables shall be of an appropriate heat shrink design incorporating a suitable arrangement for stress control, and rain sheds for outdoor use.

Termination kits shall include suitable heat shrink tubing to effectively shroud, seal and insulate the exposed cable conductor and shall include a heat shrink glove to effectively seal the crutch of the cable to prevent ingress of moisture into the interstices of the cable. Suitable arrangements shall be provided to earth the cable screens and armour

Terminations into cable boxes shall include brass compression glands and back nuts of the correct size, which shall secure the cable outer sheath and ensure effective continuity between the cable armouring wires and the metal enclosures on which the cables are terminated. At all rising terminations the cable inner sheath shall pass through the gland to terminate not less than 6 mm above the gland

#### **4.1.5.1.8 Heat Shrink Materials**

Heat shrinking tubing and moulded parts shall be flexible, flame retardant, polyofin-based material of electrical insulating quality, and shall be obtained from an approved manufacturer. They shall be suitable for use indoors or outdoors in the conditions prevailing on site

The material shall reduce to predetermined size and shape when heated above 120 °C. The components shall also be provided with an internal coating of hot melt adhesive compound that shall not flow or exude at temperature below 85 °C. All parts and materials shall be tested to a program of tests to be agreed with the manufacturer.

Each part shall bear the manufacturer's mark, part number and any other necessary marking to ensure correct identification for use on the correct size and type of cable. Each set of parts shall be packed as one unit with full and complete installation instruction and clearly marked to show the application.

#### 4.1.5.2 **Installation**

This extract from KPLC's "Medium Voltage Underground Distribution Handbook determines the minimum acceptable conditions for installation of medium voltage cables."

##### 4.1.5.2.1 **General**

The cables will be laid in trenches that will be as straight as possible avoiding sharp bends.

The areas where trenches are to be excavated will be marked clearly on the ground. If the location of other services is known, they will be marked in order to take necessary precautions.

Before construction commences trial pits will be made in order to confirm the soil strata of the planned trenches and to confirm the location of other services.

Safety precautions such as covering the trench, fencing and warning signs will have to be provided for during the period of work.

When designing the plan for the trench layout, the minimum radius will be as in the following table.

TABLE 3.1: BENDING RADII

| Bending radii   | Single core | 3-core |
|-----------------|-------------|--------|
| Recommended     | 17xD        | 15xD   |
| Minimum         | 15xD        | 12xD   |
| At sealing ends | 12xD        | 10xD   |

D = cable diameter

##### 4.1.5.2.2 **Cable Marker**

Cable markers shall be installed at the beginning and end of the cable run on the surface all along the route, at all changes of direction, and above all joints, above cable duct entries and exits and at an interval not exceeding 50m along the cable route. This information as well as details about the joint (i.e. joint location) will be also recorded on a map.

#### 4.1.5.3 **Excavation of Trenches**

The trench will be dug vertically to a minimum depth of 600mm or more as required.

All precautions must be made so as not to cover any services e.g. fire hydrants with soil that may be encountered in the path of the trench.

During construction on public roads passage and access of motorists and pedestrians to commercial areas must be maintained.

In order to reduce the cost of reinstatement on roads and pavements the digging shall be done at intervals of 2-3 m and a gallery or tunnel dug underneath.

If trenches are constructed in soggy or inconsistent soil, the cables will be laid inside a duct as a protective measure and precautions taken to prevent the entry of water at the ends or joints of the ducts

The bottom of the trench must be made of firm material in order to prevent collapse of the base that may subject the cable to mechanical stress.

When several cables of different voltages are laid in the same trench they will be placed at different depths. The cables of the higher voltage will be placed deepest.

Where the trench is too deep as to cause instability to the walls of the trench shoring will be placed to provide lateral support to the trench walls.

The separation between two groups of cables will be a minimum of 250mm. If this separation cannot be attained they will be laid in ducts or will be separated by a layer of bricks.

##### 4.1.5.3.1 **Joint Holes**

Where cable joints are required to be made in the course of a cable run, a joint hole shall be excavated of sufficient size to enable the cable jointer to work efficiently and unimpeded.

##### 4.1.5.3.2 **Backfilling of Trenches**

Once the cable has been laid the trenches must be back filled to an adequate compaction level. Care must be taken to ensure that the first layer covering the cables will be free of rocks or any sharp mechanical objects.

The back fill will be laid in layers of 150mm, which should be compressed and watered if necessary in order to make the soil sufficiently compact.

#### 4.1.5.4 **Pavement Reinstating**

The pavement shall be reinstated back to the standard of the original pavement. New materials will generally be used in accordance with Municipal regulations.

#### 4.1.5.5 **Ducts**

Road crossings when necessary will be done with ducts in the following manner

- they will be installed in a level position and concreted where possible to provide mechanical protection through out its length, they will have a depth of 1.2m.

- future expansion will be provided for by providing one or several spare ducts depending on the location of the crossing.
- at all times the cables should be adequately protected.
- road and railway crossings must be planned in full detail.
- drainage of the trenches must be provided for during and after construction.

In crossings with other normal underground services, a prudent distance will be maintained in view of future excavations, and when there is a possibility of service interference, as is the case of other electric cables, waste water sewers e.t.c.

The ducts will be fabricated from PVC or concrete with a smooth interior surface and an interior diameter of not less than 2 times the diameter of the cable to be housed inside it, and in no case will this diameter be less than 150 mm.

The joints of ducts will be sealed with cement, in which case the bottom of the trench must be carefully levelled after setting down a layer of fine sand or red soil in order to permit continuous joints.

The ducts will be laid in such a manner that there is no abrasion between the insulation of the cable and the surface of the duct.

In the cases of single core cables the cable will have to be anchored to prevent movement due to magnetic effects by concreting the ducts at the ends of the joints. This shall not apply to three core cables.

When constructing a duct a length of wire will be left inside to facilitate the fitting of cleaning elements as well as the cables themselves.

The cleaning will consist of passing inside a cylinder in order to remove concrete that will pass through the joints and later passing a broom or a rag to remove the residue.

#### 4.1.5.6 **Direct Burial**

For armoured cables the following criteria for burial will be met:

- the trench must have a 150mm layer of fine sand upon which the cable shall be laid to protect the cable from mechanical damage due to sharp objects. On top of the cable another 150mm of fine sand will be laid. Both layers will cover the entire width of the trench.
- the sand should be well graded
- any materials used for back filling the trench must meet the approval of the KPLC Construction Supervisor in charge.
- the cables must be buried at a depth of not less than 600mm. Exceptions could be made for rocky areas where the minimum depth can not be attained in this case the cable will be laid in a duct.

Cables must be protected with a layer of protecting slabs, which will also indicate their presence.

For armoured cables the excavated materials with out mechanically sharp objects will be adequate enough to backfill the trench.

Cables shall not be buried in areas within the substation boundaries. Necessary cable trenches shall be prepared instead to the satisfaction of the client's project Manager.

#### 4.1.5.7 **Galleries**

When the number of cables justify the use they shall be laid in galleries.

The cables will be fixed to the cable trays by means of brackets or clamps.

All metallic elements will be earthed with independent connectors if there are circuits of different voltages.

Electric cables will not be installed where there are inflammable materials.

#### 4.1.5.8 **Parallel Separation**

##### 4.1.5.8.1 **Low Voltage Cables**

Medium Voltage cables may be laid parallel to Low voltage cables as long as there is always a minimum distance of 250 mm between them. When this distance cannot be attained, a solid brick wall shall separate them or they will be placed in ducts.

##### 4.1.5.8.2 **Medium Voltage Cables**

The distance to be maintained in the case of parallel situations of underground Medium Voltage lines is 250mm. If this distance cannot be achieved a protective brick wall will be installed between them, or one of them will be installed within ducts.

##### 4.1.5.8.3 **Telecommunication Cables**

In the case of parallel laying of subterranean electric cables and telecommunications wires, they must be as far as possible from each other. As long as the cables both electric and telecommunications are buried, a minimum separation of 2 meters must be maintained at all times. This distance could be reduced further to 250mm between ducts.

The clearances must be in accordance with agreements between KPLC and KPTC

##### 4.1.5.8.4 **Water Steam etc.**

In parallel layouts between power cables and buried water pipes a minimum distance of 0.5m will be maintained in a horizontal projection. If these clearances cannot be maintained the cables will be laid in ducts.

##### 4.1.5.8.5 **Oil Pipe Lines**

The minimum distance between the cables and the oil pipelines will be 0.5 m. The cable will be protected from any gas leaks.

##### 4.1.5.8.6 **Sewers**

In parallel layouts of electric cables with sewerage conduits, a minimum distance of 0.5 m will be maintained, the cables will be adequately protected if this distance cannot be maintained.

##### 4.1.5.8.7 **Fuel Storage Tanks**

There will be a minimum distance of 1.20 meters between cables and fuel storage tanks, apart from providing adequate protection for the electric cables.

#### **4.1.5.8.8 Foundations of Other Services**

When there are structural supports for public transport, suspended telecommunication wires, street lighting, the electric cables will be laid at a distance of at least 500mm from the outer extremities of the supports or foundations of the structures. This minimum distance shall further be increased to 1.5m if the support or foundation is subject to continuous stress towards the curb sides.

If this separation cannot be maintained a resistant mechanical safety measure must be used throughout the length of the support and its foundation, extending to a length of 500mm, on both sides of outer extremes.

#### **4.1.5.9 Crossing of Roads and Railroad Tracks**

##### **4.1.5.9.1 Public Roads**

When crossing streets and roads cables must be laid at depths of at least 1.2m. The ducts must be durable and mechanically strong, and must have a minimum diameter of 150mm in order to permit the easy passage of the cables within the tubes. Conditions specified in the Electric Power Act must be observed at all times. Spare ducts must be provided where necessary.

##### **4.1.5.9.2 Railroad tracks**

Crossing railroad tracks must be done with conduits laid perpendicular to the tracks at a minimum depth of 1.6 m. This depth must be measured from the bottom side of the track's crossbars. It is recommended that the crossing takes place at the narrower points of railroad areas. Conditions specified by municipalities and the Railroad companies shall take precedence.

#### **4.1.5.10 Crossing Other Services**

##### **4.1.5.10.1 Low Voltage Cables**

When medium voltage cables cross low voltage cables, a minimum distance of 250mm must be kept between them. If this cannot be achieved, medium voltage and low voltage cables must be separated by pipes, conduits, or solid brick divisor walls.

##### **4.1.5.10.2 Medium Voltage Cables**

When crossing other medium voltage cables, the minimum distance to be observed between them is 250mm. If this distance cannot be maintained solid bricks must be laid between them.

##### **4.1.5.10.3 Telecommunication Wires**

When crossing telecommunication wires, the electric cables must be situated within conduits of appropriate mechanical resistance, maintaining a minimum distance of at least 250mm, between the outer sides.

The electric cable must be protected in PVC or concrete duct and in such a way that it guarantees that the distance between the cables is greater than the minimum established for parallel layouts.

The crossing must be at least 1m from a junction box for telecommunications wires and joints for electric cables will not be installed next to crossings of telecommunications cables.

#### **4.1.5.10.4 Water Steam etc.**

There should never be a water pipe joint over the cable. A water pipe joint must be at least 2.0 m from a crossing.

#### **4.1.5.10.5 Gas**

The minimum distance in crossings with gas pipelines shall be of 250mm. The crossing shall not be made over gas pipelines joints.

#### **4.1.5.10.6 Sewers**

In crossing sewage pipes it is recommended that the electric cable should be above the sewer line where possible.

#### **4.1.5.10.7 Fuel Depots**

Electric cable crossings over fuel deposits will be avoided at all times, the electric cables must be laid bordering the fuel tanks, maintaining a minimum distance of 1.2 metres.

#### **4.1.5.11 Transporting Cable Drums**

Loading and unloading from trucks or appropriate trailers will always be made through an adequate bar that passes through the centre of the cable drum.

The cable drums will always be transported upright and never on its side.

When several cable drums are transported together they must be aligned back to back and have stopping blocks to prevent movement.

The stoppers should be uniform so that they do not pierce the cable insulation. The stoppers should span the whole length of the cable drum.

An alternative to stoppers may be to have wooden pieces nailed to the platform supporting cable drums. The stoppers will be placed at the reels of the cable drums.

The cable drum must not be tied down with ropes, cables or chains. Upon off loading the cable drum the roll must not drop down from the truck or trailer, a provisional ramp with an inclination of not more than 1/4 will instead be constructed in the case where there are no pulleys for lifting the drum. The roll can be rolled of the ramp by means of guide ropes. Sand can be placed at the bottom of the ramp to act as shock absorber and brake for the cable drum.

When rolling the drum on the ground the rotational direction must be observed so that the cable does not come loose.

When the drum is rolled care must be taken to ensure that the drum is not rolled on rough ground. Care must also be taken to ensure the reel is not broken because the splinters can puncture the cable.

Where possible the cable drums should not be exposed to the elements.

#### 4.1.5.12 **Laying of the Cable**

The cable drum will be installed on the site in such a way that the cable is reeled out of the top part of the drum and is not forced when the cable is laid.

During cable laying the drum will always be supported by means of a mechanical jack and a bar of the appropriate strength.

The base of the jacks will be sufficiently large as to ensure stability during operation.

When taking off the wood stoppers care must be ensured that the material used in nailing them does no damage to the cable.

The cables must always be unrolled and laid with the greatest care to avoid torsion or kinks and always maintaining the correct bending radius of the cables (ref: 3.1)

When the cables are being laid the workers must be distributed uniformly along the trench.

The cables should also be laid using cable rollers.

#### 4.1.5.13 **Mechanical Protection**

Underground electric lines must be protected against possible breakdowns caused by landslides, contact with hard bodies, and clashing of metal tools. For this purpose, a protective layer of hatari slabs of class 15 concrete will be placed.

#### 4.1.5.14 **Warning Signs**

All cables must have a protection slab placed over the cables buried at least 200 mm above the cable layer. When the cables or groups of cables of different voltages are placed in vertical layers the protection slab must be placed over each layer.

##### 4.1.5.14.1 **Identification**

The cables must bear marks indicating the year of manufacture, manufacturers name, and cable characteristics (size and voltage level).



|           |  |                                     |
|-----------|--|-------------------------------------|
| 4.1.6.    | Telecommunications .....                           | 120                                 |
| 4.1.6.1.  | General requirements.....                          | 120                                 |
| 4.1.6.2.  | ADSS Cable.....                                    | 121                                 |
| 4.1.6.3.  | Approach Fiber Optic Cable:.....                   | <b>Error! Bookmark not defined.</b> |
| 4.1.6.4.  | Fittings & Spare Capacity: .....                   | 122                                 |
| 4.1.6.5.  | Fibre Optic Ground Wire (OPGW) .....               | 122                                 |
| 4.1.6.6.  | Non – Metallic Underground Fibre Optic Cable ..... | 124                                 |
| 4.1.6.7.  | Optical Distribution Frames (ODF).....             | 124                                 |
| 4.1.6.8.  | Fibre Terminal Equipment.....                      | 125                                 |
| 4.1.6.9.  | Specifications For VHF 2-Way Base Radio.....       | 127                                 |
| 4.1.6.10. | Spare Parts and Tools .....                        | 128                                 |
| 4.1.6.11. | Tools And Test Equipment.....                      | <b>Error! Bookmark not defined.</b> |
| 4.1.6.12. | Documentation: .....                               | 128                                 |
| 4.1.6.13. | Training: .....                                    | 128                                 |
| 4.1.6.14. | Testing .....                                      | 128                                 |
| 4.1.6.15. | System Acceptance.....                             | 129                                 |

#### 4.1.6. Telecommunications

##### 4.1.6.1. General requirements

The objective of the telecommunications system is to transmit and receive data, voice and Teleprotection signals. Telecommunication links based primarily on Fibre (OPGW and ADSS) multiplexers and on some cases Radio and PLC shall be established linking various equipment in substations to Regional Control Centres (RCCs). Necessary engineering required for transmitting data and speech signals to the Regional and National Control Centre(s) shall be included. The links shall consist of STM-1/4 SDH Terminal equipment(s), and shall be connected to existing KPLC network. KPLC has SDH network with the backbone mainly consisting of STM-1/4 network.

The telecommunication system to be provided shall be designed to transmit and receive data, voice, and Tele-protection signals where necessary.

Where the station is for Voltages above 66 kV the SAS/RTU and Telecommunications links shall be configured to have connection to both Regional and National Control Centres. These links shall include Tele-protection facilities with for four commands per line.

For 33kV substations with a transformation capacity of **less than** 23 MVA, the links shall be designed for connection to respective RCCs. .

These specifications describe the basic requirements for the Telecommunications various systems.

Tenderers are requested to submit with their offers the detailed catalogues, brochures and technical drawings with the specific items on offer clearly marked for the products they intend to supply.

Tenderers must indicate on the specifications sheets whether the equipment offered comply with each specified requirement.

The tender documents shall be accompanied by Type test and Routine test certificates, certified by the National Testing or the National standards Institute of the country of origin.

At her discretion, all equipment shall be subjected to inspection by the clients Engineers or representative at the place of manufacture where all routine tests on randomly picked sample(s) shall be carried out in their presence. Test reports shall be completed for each equipment and made available to KPLC after the tests have been carried out.

All the dimensions and capacities of the equipment to be supplied shall not be less than those required in these specifications. Deviations from the basic requirements, if any, shall be explained in detail in writing with the offer, with supporting data such as calculation sheets, etc. The Procuring entity reserves the right to reject the products, if such deviations shall be found critical to the use and operation of the products.

## **TECHNICAL SPECIFICATIONS**

### **4.1.6.2. ADSS Cable**

#### **i. Design Principles:**

The proposed Fibre cable shall be single mode, 48 core all-dielectric self-supporting cable (ADSS).

The cable shall be designed and manufactured in accordance with the following standards:

- Cable IEEE 1222
- Fiber IEC 60793, ITU-T G.65X series
- Color code ANSI/EIA 359-A, IEC 60304

#### **ii. Route Survey:**

Prior to design and installation, the contractor shall visit the route accompanied by KPLC staff to ascertain for themselves the requirements for the link. During this survey a pole count and a sketch for the cable installation shall be carried out. This sketch shall indicate the locations of splice boxes and the approximate distances between them. The poles shall also be assessed for their ability to support the ADSS cable. Any need for modification shall be determined at this stage.

Suitable drum lengths shall also be determined at this stage to reduce the number of joints preferably at section poles. KPLC shall assess the contractor's report and carry out modifications where it is felt necessary.

#### **iii. Installation:**

The cable installation shall be aerial on existing power lines. Majority of these lines are on wooden structures and the ADSS cable shall be installed below the power line. The installation shall be done under live line conditions except in some instances where safe working clearance cannot be maintained.

It is not the intention of the employer to recommend any specific installation method but whichever method applied should be in accordance with the international standards, manufacturer's recommendation and within KPLC safety regulations.

#### **iv. Installation Materials & Fittings:**

All bolts, nuts and clamps used during the construction shall confirm to IEEE standards that apply to testing and performance of Hardware for All-Dielectric Self Supporting cable (ADSS)

All fitting materials shall conform to the approved standards by IEEE1222. The bidder shall attach type test certificates from the certifying bodies

v. **Splicing & Testing:**

All joints shall be fusion spliced. The splice loss shall be equal to or less than **0.1db**. After all the terminations are done the cable shall be tested from ODF to ODF using the OTDR as well as power meter and the results tabulated.

vi. **Fittings & Spare Capacity:**

Unless otherwise specified in this specification, all requirements for individual components and completed cable shall be mainly in accordance with the following standard specifications.

IEEstd 1222, IEC 60794-4, IEC 60793-1, IEC 60793-2, IEC 60794-1, ITU-T G.650, ITU-T G.652, ITU-T G.655, EIA 492A, EIA 472A, EIA 598 or ANSI/EIA 359-A-1985, ISO 9001 and ISO 14001.

The Contractor shall include **10%** spare cable capacity for future maintenance work on the link at agreed intervals.

#### **4.1.6.3. Fibre Optic Ground Wire (OPGW)**

The overhead earth wire shall be Fibre Optic Ground Wire (OPGW) with a minimum of 48 strands. The fibre optic earth wire supplied shall be suitable for installation on transmission line and shall be supplied complete with all necessary fittings and optical joint boxes. The earth wire fittings and optical joint boxes shall be type approved.

The manufacturer of the OPGW shall be responsible for the supervision of installation by the Contractor; to ensure that system reliability requirements are met.

The fibre optic earth wire shall comprise an optical sub-unit containing optical fibres over which shall be laid aluminium, aluminium alloy or aluminium coated steel strands. The clad steel wire incorporated in fibre optic earth wire shall comply with the requirements of IEC 61232. Shaped aluminium or aluminium alloy wire sections shall conform to the requirements of the appropriate IEC standard.

The optical sub-unit shall withstand the temperature rise associated with the specified lightning fault current flowing in the earth wire without damage. The fibre optic earth wire (OPGW) shall be manufactured in continuous lengths of not less than 2,000 m.

The overall system design of the fibre optic system shall meet the following minimum requirements:

Single failure or degradation in any optical fibre not more than one year averaged over five years;

Failures or degradations affecting more than one optical fibre, not more than one in ten years;

Increase in optical system transmission attenuation due to accumulated ageing and other effects at the end of five years and not more than 0.05 dB/km.

The Contractor shall ensure that the fibre optic cable are not strained or damaged either mechanically or optically during stringing and/ or jointing.

The cable shall be capped before shipment to prevent the ingress of water.

### **Optical Fibres**

Optical fibres shall be single mode fibre and shall conform to IEC 793-2-B1.

The fibre coating material shall be mechanically strippable. The optical fibres shall be capable of being jointed by fusion technique.

There shall be no measurable long term or short-term optical attenuation change due to the temperature rise associated with a fault current flowing in an earth wire, or a lightning strike on the earth wire.

### **OPGW Fittings**

The fibre optic earth wire shall be with approved conductor fittings. The application of these fittings shall not damage the earth wire or fibres, either mechanically or optically.

At each support, a bypass device shall be provided to guide the cable around the earth wire fittings associated with the support.

### **Optical Joint Boxes**

Optical joint boxes shall be provided to protect the splice joint of optical fibres, either when individual lengths of the fibre optic OPGW, are jointed or between the fibre optic earth wire and the underground fibre optic cable.

The joint boxes shall consist of external steel or die cast aluminium housing providing protection to IEC 529 IP 44 and an internal die cast aluminium or high impact plastic ABS box to IEC 529 IP54

The external housing shall be designed so that the rainwater is directed away from the door and there shall be no water ingress when the door is opened.

The joint boxes shall be supplied complete with all fittings to secure and seal the cable in the gland plates or blank the unused spigots. The cable cleats to secure the fibre optic OPGW or underground cable shall be fitted inside the box. The cleats shall not have a detrimental effect on the performance of the optical fibres when tightened to the recommended torque.

The top and bottom of the joint box shall be vented and the vents provided with the vermin shields.

The box shall be supplied complete with internal splice cassettes to accommodate the required number of splices. The glands shall be fitted to accommodate either the fibre optic OPGW or underground fibre optic cable.

### **Fixing Clamps**

A bolted clamping system shall be used to attach the OPGW to the inside of the support, without drilling or modifications to the support steel work. The attachment clamps shall be capable of being attached and detached from the support, without affecting the OPGW. Fixing clamps shall be made from a suitable grade of aluminium alloy complying with the requirements of BS 1490 and / or BS EN 1676. Bolts shall be made from mild steel grade S275JR to BS EN 10 025. Bolts and nuts shall be ISO Metric Black Hexagon to BS 4190 and shall unless otherwise specified be threaded ISO Metric Coarse Pitch to BS 3643: Part 2, Tolerance Class 7h/8g.

#### **4.1.6.4. Non – Metallic Underground Fibre Optic Cable**

Where required, The fibre optic cable shall be circular in cross section and shall be designed so that any cable strain is so directly imported on the optical fibres. The cable shall not include any metallic components to prevent high-induced voltages when used in switching or substation compounds.

#### **4.1.6.5. Approach Fiber Optic Cable:**

The ADSS/OPGW cable shall terminate at first structure after the bus bar at the substations. An underground fibre optic cable shall be run from this structure to the building. This approach cable shall be 48 core SM, armoured, loose tube cable, with a dielectric central member. The cable shall be Kevlar yarn reinforced, steel tape armour and a UV resistant HDPE outer layer. It is for outdoor applications, in ducts, for direct burial or latched installations

#### **4.1.6.6. Optical Distribution Frames (ODF)**

The optical fiber distribution frame (OFD) is installed for terminating optical fiber cables and patch cord. The distribution frame should include the metallic casing, adapter plate, splice tray, and other necessary materials for the termination of optical fiber cable. Therefore it should be designed properly for the fiber splicing and distribution. Separate storage shelf and distribution shelf can be offered if required. The OFD shall be of corrosion resistance and robust construction; and shall allow both top or bottom entry for access to the splice trays. Specific selection of the entry points shall be made at the time of installation. The OFD shall be installed on the international standard (ETSI 19”) equipment rack or cabinet rack. The optical fiber distribution frames shall include all necessary parts to complete the joint. This will comprise all components to protect and store the spliced fiber; and provide sheath continuity. The distribution frame shall be designed with enough spare capacity for fiber splices. The distribution frame shall be made from fabricated mild steel not less than 1.2mm thick or equivalent and painted in good condition. The design of the fiber distribution frame shall allow minor deviations from the escribed installation procedures without any harm to the fibers and the long-term performance of the installation. The shelf and the connection

between shelves shall be designed to maintain minimum bending radius of 30mm. the connectors to be used shall be subject to approval by the Project Manager.

Assignment between station fibre cable and OLTE's shall be made by using patch cords between the termination box and the optic distribution frame. Capacity of the optic distribution frame shall allow free assignment between each individual fibre of the station fibre optic cables and the relevant optical I/O ports of the OLTE's.

The optic distribution frame shall be equipped with low loss optical connectors (< 0.25 dB including the loss in the bulk head, loss in the connector splice & the loss in the pig tail) of the screw-on type. Auxiliary connectors shall be provided to facilitate testing and maintenance of the fibres/equipment. All spare fibres shall be properly terminated and spliced on connectors of the same type within the frame

#### **4.1.6.7. Fibre Terminal Equipment**

The terminal equipment shall be the type SDH STM-1/4 optical terminal equipment and shall be supplied from 48 VDC source.

SDH (STM-1) multiplexer shall be installed in racks that are EMC compatible and suitable to work in HV system environments.

The multiplexer shall be based on the SDH technology, working on the basic transmission Bit Rate of 155.520 Mbit/s (STM-1). It shall be in accordance with the latest ITU-T SDH recommendations such as: G.703, G.704, G.774, G.783, G.784, G.785, G.811, G.812, G.813, G.823, G.825, G.826 and M.3010.

The equipment shall be able to perform both, multiplexing and line terminating functions. The SDH Equipment (Terminal Equipment, Add/Drop Multiplex, Synchronous Digital Cross-Connect) to be offered shall meet the following requirements:

- It shall have at least all the functions outlined in ITU-T G.783.
- The PDH electrical tributary interfaces to the SDH equipment shall conform to ITU-T G.703.
- The SDH electrical and optical interfaces shall conform to ITU-T G.703 and G.957.
- The cross-connect offered shall be capable of providing non-blocking connection between virtual containers.
- The Optical Power to be offered shall be such that under normal operating condition, the BER of the system at the receiver is better than  $1 \times 10^{-10}$ . Error performance versus the receive signal shall be verified during the factory acceptance tests.

The multiplex structure shall conform to ITU-T G.707. Details of the Multiplex structure for the offered equipment including the usage of the overhead bits shall be detailed with the offer. The synchronous optical interface protection shall be achieved by having 1+1 protection. The laser shall automatically cut-off when the link is disturbed. Redundant cross connect, where failure on either one shall not cause link outage, and path protection on the traffic interface and the 2 Mbit/s levels shall also be provided.

Timing and synchronization shall conform to ITU-T G. 783, G.811, G.812 and G.813. Timing references, number of timing references available, switching time to a different timing reference, type and level of clocks shall be stated in the offer.

The equipment shall automatically switch to another clock if the reference timing is lost and automatically revert back upon restoration. The accuracy of the internal clock as well as the details of the clock signal distribution shall also be stated in the offer.

The equipment shall be capable of diverting timing references between the STM-1, 2 Mbit/s and a G.703 tributary interfaces.

The SDH equipment shall be wired for the full STM-1 capacity, however equipped under the scope of this specification to receive at least four (4) PCM tributaries as specified below. However, if higher PDH signals other than the 2 Mbit/s are required to be routed through, the same shall be possible just by adding the respective interface cards and no extra wiring needed. It shall have 2 Mbit/s outputs where it can directly be connected to digital telephone exchanges or teleprotection equipment.

The jitter and wander tolerance for PDH and SDH interfaces shall conform to ITU-T G.823 and G.825. Jitter and wander characteristics of SDH multiplex and line equipment shall conform to ITU-T G.783.

The Contractor shall submit the details of the power budget calculations stating the following (based on 0.25 dB/km optical fibre attenuation at 1550 nm):

- Transmitter Power
- Minimum receive Signal @ BER  $1 \times 10^{-10}$
- Connector Loss
- Repair Splice Loss
- Power Penalty (Chromatic dispersion and LD reflection Loss)
- Maintenance Margin (> 2dB)
- Other Loss
- System Margin
- The SDH equipment to be offered shall provide the followings:



- A data communication channel to the Telecommunication Management Network, in accordance with ITU-T G.773 for the purpose of integration of the new equipment into the Telecommunication Network Management System.
- A Craft interface in accordance with ITU-T G.773 to allow a local terminal to access the network element.
- An engineer order–wire which shall have conference and selective calling features.
- Performance monitoring in accordance with ITU-T G.784 and G.826.
- Optical safety as per ITU-T G.783.
- The alarm functions shall include but not limited to:
  - Alarms classified as critical, major, minor, and information.
  - Indications of loss of incoming signal.
  - Visual and audible indication of alarms.
  - Test function of alarm indicators to ensure workability of alarm indicators.
- Alarm functions shall be detailed by the Contractor, e.g. if implemented in Telecommunication Network Management System.
- The offered equipment shall have sufficient capacity for speech, Ethernet data, SCADA data etc and capable of extension to higher capacity by adding relevant modules.

**4.1.6.8. Specifications For VHF 2-Way Base Radio**

| NO. | DESCRIPTION   | part/model NUMBER | Comments |
|-----|---|-------------------|----------|
| 1   | MOTOROLA BASE STATION APX 2500 DIGITAL VHF RADIO<br>Freq;138-150MHZ:<br><i>Flashport code:</i><br>Complete with:13.5VDC PWR cable, desk microphone, desk Tray |                   |          |
| 2.  | Fiberglass: COLLINEAR base station omni-directional 3db antenna 138-150MHZ range  |                   |          |
| 3.  | 30 METERS RG 213 COAXIAL CABLE  |                   |          |
| 4.  | Mini-UHF Crimp type connector to N-MALE RG213, 2Mtr RG58 N-Male/Mini-UHF pigtail Jumper   |                   |          |
| 5.  | ASTRON POWER SUPPLY UNIT/BATTERY CHARGER  | RS 20A-220-BB     |          |
| 6.  | RS-232 Motorola CPS Programming cable   | HKN6183           |          |
| 7.  | Motorola CPS Programming software   |                   |          |

|    |  |                 |  |
|----|--|-----------------|--|
|    | NB; VERSION 19   |                 |  |
| 8. | 75 or 70 AH 12V DC Free maintenance battery                                    |                 |  |
| 9. | 6 Meter 1-1/2 Galvanized pipe complete with support arms brackets for mounting | HARDWARE STORES |  |

#### **4.1.6.9. Spare Parts, Tools and Test Equipment**

Spares for Telecommunications shall be one module for each type of the modules supplied. Specialised tests tools and equipment for testing, configuration and maintenance of equipment, shall be supplied. This shall include data tester and optical test tools.

The test equipment and other special tools proposed shall be of the same type as used by the contractor for erection and commissioning. The test equipment shall be new and shall not however be available to the contractor during erection and commissioning. All licences required for commissioning of equipment shall be included.

An OTDR (MTS 8000) or its Equivalent, and The Contractor shall furnish a list of recommended spare parts for the OLTEs.

#### **4.1.6.10. Documentation:**

- i. The Contractor shall provide all necessary drawings, design specifications, design details, operation and maintenance manuals. All manuals and As-Built-Drawings documents shall be supplied in three hard copies and a softcopy in PDF.
- ii. Functional Design Specification (FDS)
- iii. Test Specification for Factory Acceptance Test (FAT)
- iv. Operator's Manual
- v. Product Manuals

#### **4.1.6.11. Training:**

The Contractor shall provide 1 week training for four KPLC staff at the supplier's manufacturing premises on each Telecommunication type of equipment supplied and on site during installation works. All training costs shall be borne by Contractor expect travel to manufacturers place while accommodation which shall be borne by KPLC. The scope of each service shall be given. The training content shall be subject to approval of the project Manager.

#### **4.1.6.12. Testing**

The formal stages of testing to be performed fall into the following three categories:

- Type Tests Equipment shall pass these tests in order to be accepted for use under this Contract
- Factory Acceptance Tests (FAT) Systems shall pass these tests before they may be shipped to site. The employer shall witness FATs unless he waives this in writing. FAT preparation costs shall be borne by contractor except transport and accommodation. FAT shall be carried by two KPLC staff for 5 days..
- Site Acceptance Tests (SAT) Systems shall pass these tests before they may be put into operation and before they are Taken Over

#### **4.1.6.13. System Acceptance**

The System will be accepted by KPLC if both:

- The System and all items of equipment have successfully completed all the specified tests
- All failures, problems and reservations noted during the tests have been corrected to the satisfaction of KPLC.
- If either of these conditions has not been complied with, then the necessary corrective action shall be agreed between the Contractor and KPLC.

**SCOPE OF WORK**

**NAIROBI**

**SUBSTATIONS**

## TABLE OF CONTENTS

|          |  |                                     |
|----------|--|-------------------------------------|
| 4.2      | SCOPE OF WORK - SUBSTATIONS.....   | 132                                 |
| 4.2.1    | General.....   | 132                                 |
| 4.2.2    | Standard Substation.....   | 133                                 |
| 4.2.3    | SCADA and Telecommunications.....  | <b>Error! Bookmark not defined.</b> |
| 4.2.4    | 132 kV Bay.....  | 133                                 |
| 4.2.4.1  | Transformer Bay.....   | 133                                 |
| 4.2.4.2  | Feeder Bay.....  | 133                                 |
| 4.2.5    | 66 kV Switchgear Outdoor Type.....   | 134                                 |
| 4.2.5.1  | Transformer Bay.....   | 134                                 |
| 4.2.5.2  | Feeder Bay.....  | 134                                 |
| 4.2.6    | 33 kV Switchgear Outdoor Type.....   | 135                                 |
| 4.2.6.1  | Transformer Bay.....   | 135                                 |
| 4.2.6.2  | Feeder Bay.....  | 136                                 |
| 4.2.6.3  | Bus Bar Protection.....  | 136                                 |
| 4.2.7    | 11 kV Switchgear Outdoor Type.....   | 136                                 |
| 4.2.7.1  | 11 kV Transformer Bay.....   | 136                                 |
| 4.2.7.2  | 11 kV Feeder Bay.....  | 137                                 |
| 4.2.7.3  | Auxiliary Transformer bay.....   | 137                                 |
| 4.2.8    | 11 kV Switchgear Indoor Type.....  | 137                                 |
| 4.2.8.1  | Switch Board Panel for 11 kV Transformer Bay.....                          | 138                                 |
| 4.2.8.2  | Switch Board Panel for 11 kV Feeder Indoor panel.....                      | 138                                 |
| 4.2.8.3  | Switch Board Panel for Indoor Bus- Sectionalizer.....                      | 138                                 |
| 4.2.8.4  | Switch Board Panel for Auxiliary Transformer.....                          | 139                                 |
| 4.2.8.5  | Current Transformers for Neutral current measurements.....                 | 139                                 |
| 4.2.8.6  | Lightning Arresters.....   | 139                                 |
| 4.2.9    | Auxiliary transformer for 33/11kV Substations and 66/11kV Substations..... | 139                                 |
| 4.2.10   | MV Power Cables from Transformer to Indoor Switchgear.....                 | 140                                 |
| 4.2.11   | MV Power Cables from Indoor Switchgear to line termination tower.....      | 140                                 |
| 4.2.12   | Control, Protection, Metering and Signalling.....                          | 140                                 |
| 4.2.12.1 | Substation Automation System.....  | 140                                 |
| 4.2.12.2 | SCADA Interface.....   | 142                                 |
| 4.2.12.3 | Control and Measuring Cables.....  | 142                                 |
| 4.2.12.4 | Telecommunications.....  | 142                                 |
| 4.2.13   | Auxiliary AC Supply Equipment.....   | 144                                 |
| 4.2.13.1 | Main AC Distribution Board.....  | 144                                 |
| 4.2.13.2 | Sub-distribution Boards and Panels.....                                    | 144                                 |
| 4.2.13.3 | Cables.....  | 144                                 |
| 4.2.14   | DC Supply System.....  | 145                                 |
| 4.2.14.1 | Battery.....   | 145                                 |
| 4.2.14.2 | Charger.....   | 145                                 |
| 4.2.14.3 | Switchboard.....   | 145                                 |
| 4.2.14.4 | Battery Conductors and Fuses.....  | 145                                 |
| 4.2.14.5 | Sub-distribution Boards and Panels.....                                    | 146                                 |
| 4.2.14.6 | Cables.....  | 146                                 |
| 4.2.15   | Earthing System.....   | 146                                 |
| 4.2.16   | Ancillary Equipment.....   | 146                                 |
| 4.2.16.1 | Station Equipment.....   | 146                                 |
| 4.2.16.2 | Earthing Devices.....  | 146                                 |
| 4.2.16.3 | Cable Accessories.....   | 146                                 |
| 4.2.16.4 | Racks, Conduits, Ducts, etc.....   | 146                                 |
| 4.2.17   | Power transformers.....  | 147                                 |
| 4.2.17.1 | Type of transformers.....  | 147                                 |
| 4.2.18   | Civil Works.....   | 147                                 |
| 4.2.18.1 | Platform works.....  | 147                                 |
| 4.2.18.2 | Switchgear buildings.....  | 147                                 |
| 4.2.18.3 | Transformer foundations.....   | 147                                 |
| 4.2.18.4 | Cable Trenches.....  | 148                                 |
| 4.2.19   | Training in control and protection system (LS-008a, 008b).....             | 148                                 |
| 4.2.20   | Factory Acceptance Test (LS – 001,002,003,004,005,006,007).....            | 148                                 |
| 4.2.21   | Test Equipment (TS –001).....  | 148                                 |
| 4.2.22   | Final documentation.....   | 148                                 |
| 4.2.23   | Facilities for the project Manager.....                                    | 149                                 |

|   |                                     |
|---|-------------------------------------|
| <i>Site Offices</i> .....                             | 149                                 |
| 4.2.24 <i>LOT 1</i> .....                             | 150                                 |
| 4.2.24.1 KISERIAN .....                               | <b>Error! Bookmark not defined.</b> |
| 4.2.24.2 KITENGELA .....                              | <b>Error! Bookmark not defined.</b> |
| 4.2.24.3 MWIHOKO .....                                | <b>Error! Bookmark not defined.</b> |
| 4.2.24.4 UMOJA .....                                  | <b>Error! Bookmark not defined.</b> |
| 4.2.24.5 KANGUNDO .....                               | 153                                 |
| 4.2.26 <i>Mandatory Spare Parts and Tools</i> .....   | 156                                 |
| 4.2.26.1 For Transformers .....                       | 159                                 |
| 4.2.26.2 For Substations .....                        | 160                                 |
| 4.2.27 <i>Recommended Spare Parts and Tools</i> ..... | 161                                 |

## **4.2 SCOPE OF WORK - SUBSTATIONS**

### **4.2.1 General**

The Bidder shall examine the scope of works in this section in close connection with the other documents and particulars forming these Bidding Documents.

Special attention shall be paid to General Specifications and Particular Technical Specifications, in which the general technical requirements are specified. The drawings enclosed in are for bidding purposes only.

If the Specifications and/or Drawings do not contain particulars of materials or goods, which are necessary for the proper and safe completion, operation, and maintenance of the equipment in question, all such materials shall be deemed to be included in the supply.

In the event of any conflict between the Drawings and the Specifications, the latter shall prevail.

In the event of any conflict between scaled dimensions and figures on the Drawings, the figures shall prevail.

Should the Bidder find discrepancies in or omissions from these Specifications or from the other Documents, or should he be in doubt as to their meaning, he should immediately contact the Project Manager for interpretation, clarification or correction thereof before submitting his Bid. Such action shall, however, in no case be considered as a cause for altering the closing date of the Bid.

The scope of work for equipment shall cover engineering design, manufacture, testing before shipment and packing sea worthy or otherwise as required, delivery DDP site, of all equipment as specified in the preceding chapters.

For substations contracted on turn key basis the substation contractor shall be responsible for design, material supply, transport, erection, installation and commissioning as well as having the full responsibility for civil works including design and construction of transformer foundations and control building.

The Contractor shall design and construct the transformer foundations with oil collection pit, oil trap(Oil interceptor) and fire damper consisting of crushed stones laying on a galvanised steel grating. Fire wall shall be constructed where necessary.

Loose equipment for the Employer's rehabilitation shall be complete with documentation and ancillaries like programs, licences and programming tools.

Equipment that is to be dismantled and removed from existing substations is to be recovered by the Contractor and deposited to sites within or in the immediate

vicinity of each substation. Such sites are to be designated by the Employer. The recovered equipment is to be taken over by the Employer at these sites.

#### Standard Substation

This section defines the standard substation components. The actual quantities to be included in the price schedules are found for each substation in the subsequent sections.

### 4.2.2 132 kV Bays

#### 4.2.2.1 Transformer Bay

1 (one) complete bay shall be equipped with:

- a. 1 (one) circuit breaker
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- d. 1 (one) set of busbars
- e. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the transformer bushings, to the busbars and to and between the apparatus.
- f. 1 (one) set of current transformers
- g. 1 (one) set of surge diverters
- h. 1 (one) set of steel structures for support
- i. 1 (one) bay control unit with proper display, for measurements (V,I,MVAR,MW)
- j. Tap changer voltage regulating relay (AVR)
- k. 1 (one) multifunctional protection unit as per 4.1.2.4.2.2 Section VI Particular Technical specifications substations control, and Protection
- l. 1 (one) restricted fault relay function
- m.
- n. HV overcurrent protection relay.
- o. 1 (one) lock-out trip relay with electrical/hand reset facilities
- p. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation

#### 4.2.2.2 Feeder Bay

1 (one) complete bay shall be equipped with:

- a. 1 (one) circuit breaker
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- d. 1 (one) set of busbars
- e. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the busbars and to and between the apparatus.
- f. 1 (one) set of current transformers
- g. 1 (one) set of voltage transformers



- h. 1 (one) set of surge diverters
- i. 1 (one) set of steel structures for support
- j. 1 (one) set of control/protection panel
- k. 1 (one) bay control unit with display and measuring functions
- l. 1 (one) multifunctional protection unit as per 4.1.2.4.2.1
- m. 1 (one) lock-out trip relay with electrical/hand reset facilities
- n. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.

### 4.2.3 66 kV Bays

#### 4.2.3.1 Transformer Bay

1 (one) complete bay shall be equipped with:

- a. 1 (one) circuit breaker
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- d. 1 (one) set of busbars
- e. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the transformer bushings, to the busbars and to and between the apparatus.
- f. 1 (one) set of current transformers
- g. 1 (one) set of surge diverters
- h. 1 (one) set of steel structures for support
- i. 1 (one) bay control unit with proper display, for measurements (V,I,MVAR,MW)
- j. Tap changer voltage regulating relay (AVR)
- k. 1 (one) multifunctional protection unit as per 4.1.2.4.2.2 Section VI Particular Technical specifications substations control, and Protection
- l. 1 (one) restricted fault relay function
- m.
- n. HV overcurrent protection relay.
- o. 1 (one) lock-out trip relay with electrical/hand reset facilities
- p. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation

#### 4.2.3.2 Feeder Bay

1 (one) complete bay shall be equipped with:

- a. 1 (one) circuit breaker
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- d. 1 (one) set of busbars

- e. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the busbars and to and between the apparatus.
- f. 1 (one) set of current transformers
- g. 1 (one) set of surge diverters
- h. 1 (one) set of voltage transformers
- i. 1 (one) set of steel structures for support
- j. 1 (one) set of control/protection panel
- k. 1 (one) bay control unit with display and measuring functions
- l. 1 (one) multifunctional protection unit as per 4.1.2.4.2.1
- m. 1 (one) lock-out trip relay with electrical/hand reset facilities
- n. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.

#### **4.2.4 33 kV Bays**

##### **4.2.4.1 Transformer HV Bay**

1 (one) complete bay shall be equipped with:

- a. 1 (one) circuit breaker/Auto recloser
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- a. 2 (two) sets of Taplin Isolators and 1 (one) By-pass Air Break Switch for the Auto Reclosure
- b.
- c. 1 (one) set of busbars
- d. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the transformer bushings, to the busbars and to and between the apparatus.
- e. 1 (one) set of current transformers
- f. 1 (one) set of surge diverters
- g. 1 (one) set of steel structures for support
- h. 1 (one) bay control unit with proper display, for measurements (V,I,MVAR,MW)
- i. Tapchanger voltage regulating relay (AVR)
- j. 1 (one) multifunctional protection unit as per 4.1.2.6.2.2 Section VI Particular Technical specifications substations control, and Protection
- k.
- l. 1 (one) restricted fault relay function
- m.
- n. HV overcurrent protection relay.
- o. 1 (one) lock-out trip relay with electrical/hand reset facilities
- p. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation

#### 4.2.4.2 FeederBay

1 (one) complete bay shall be equipped with:

- a. 1 (one) Circuit breaker/auto recloser
- b. 2 (two) isolator with motor operation
- c. 1 (one) earthing switch
- d. 2 (two) sets of Taplin Isolators and 1 (one) By-pass Air Break Switch for the Auto Reclosure
- e.
- f. 1 (one) set of busbars
- g. 1 (one) complete set of three-phase line including clamps for the flying busbars and for connection between the gantries, to the busbars and between the apparatus.
- h. 1 (one) set of current transformers
- i. 1 (one) set of surge diverters
- j. 1 (one) set of voltage transformers
- k. 1 (one) set of steel structures for support
- l. 1 (one) set of control/protection panel
- m. 1 (one) bay control unit with display and measuring functions
- n. 1 (one) multifunctional protection unit as per 4.1.2.4.2.1
- o. 1 (one) lock-out trip relay with electrical/hand reset facilities
- p. 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.

#### 4.2.4.3 Bus Bar Protection

1 (one) bus bar protection and control for all 66 kV and 33KV bus bars.

#### 4.2.5 11 kV Bays - Outdoor Switchgear Type

##### 4.2.5.1 Transformer Incomer Bay

1 (one) complete bay shall be equipped with:

- (a) 1 (one) Autorecloser/Circuit breaker
- (b) 1 (one) earthing switch
- (c) 2 (two) sets of Taplin Isolators and 1 (one) By-pass Air Break Switch for the Auto Reclosure
- (d)
- (e) 1 (one) set of busbars
- (f) 1 (one) set of current transformers
- (g) 1 (one) set of surge diverters
- (h) 3 (three) sets of air break switches
- (i) 1 (one) neutral current transformer
- (j) 1 (one) bay control unit with display and measuring functions

- (a) 1 (one) restricted fault relay function (if not provided on the HV transformer bay panel)
- (k)
- (l) 1 (one) neutral point earth fault relay function
- (m) 1 (one) lock-out trip relay with electrical/hand reset facilities
- (n) 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.
- (o) 1 (one) set of voltage transformers (with a facility for primary isolation)

#### 4.2.5.2 Feeder Bay

1 (one) complete bay shall be equipped with:

- (b) 1 (one) Autorecloser/circuit breaker
- (c) 1 (one) earthing switch
- (d) 2 (two) sets of Taplin Isolators and 1 (one) By-pass Switch for the Auto Reclosure
- (e) 1 (one) set of air break switch
- (f)
- (g) 1 (one) set of busbars
- (h) 1 (one) set of current transformers
- (i) 1 (one) set of surge diverters
- (j) 1 (one) bay control unit with display and measuring functions
- (k) 1 (one) 3-phase over current relay function with auto re-close function. The auto-reclose function must be selectable with an external switch
- (l) 1 (one) Earth fault relay function
- (m) 1 (one) sensitive Earth fault function
- (n) 1 (one) restricted fault relay function (if not provided on the HV transformer bay panel)
- (o) 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.

Note: 11KV Capacitor bank switchgear shall be equipped with the necessary protection and control relays for Capacitor banks. .

#### 4.2.5.3 Auxiliary Transformer bay

1 (one) complete bay equipped with:

- (a) 1 (one) set of expulsion fuses
- (b) 1 (one) set of busbars jumpers

#### 4.2.6 11 kV Bays - Indoor Switchgear Type

#### 4.2.6.1 Transformer Incomer Bay - Switch Board Panel

1 (one) complete bay shall be equipped with:

- a) 1 (one) Withdrawable circuit breaker
- b) 1 (one) earthing switch
- c) 1 (one) set of busbars
- d) 1 (one) set of current transformers
- e) 1 (one) bay control unit with display and measuring functions
- f) 1 (one) restricted fault relay function (if not provided on the HV transformer bay panel)
- g)
- h) 1 (one) neutral point earth fault relay function
- i) 1 (one) lock-out trip relay with electrical/hand reset facilities
- j) 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.
- k) 1 (one) set of voltage transformers (with a facility for primary isolation)

#### 4.2.6.2 Feeder Bay -Switch Board Panel

1 (one) complete bay shall be equipped with:

- a) 1 (one) Withdrawable Circuit breaker
- b) 1 (one) earthing switch
- c) 1 (one) set of busbars
- d) 1 (one) set of current transformers
- e) 1 (one) bay control unit with display and measuring functions
- f) 1 (one) 3-phase over current relay function with auto re-close function. The auto-reclose function must be selectable with an external switch
- g) 1 (one) Earth fault relay function
- h) 1 (one) sensitive Earth fault function
- i) 1 (one) trip relay
- j)
- k) )
- l) 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for SCADA operation.

Note: 11KV Capacitor bank switchgear shall be equipped with the necessary protection and control relays for Capacitor banks.

#### 4.2.6.3 Bus- Section Switch Board Panel

1 (one) complete bay shall be equipped with:

- (a) 1 (one) circuit breaker
- (b) 1 (one) set of protection current transformers.
- (c) 2 (two) earthing switches (one on each busbar section if not located elsewhere)

- (d) 1 (one) set of busbars including droppers and risers
- (e) 2 (two) set of voltage transformers (one on each busbar section if not located elsewhere)
- (f) 1 (one) bay control unit with display
- (g) 1 (one) overcurrent function and 1 (one) relay function
- (h) 1 (one) trip relay
- (i)
- (j) 1 (one) lot of necessary interposing relays, MCB's, terminal blocks and wiring to form a complete operative bay control. The control scheme shall be prepared for remote operation.

#### **4.2.6.4 Auxiliary Transformer Bay- Switch Board Panel**

1 (one) complete bay equipped with:

- a) 1 (one) circuit breaker
- 1 (one) set of protection current transformers
- b) 1 (one) overcurrent function and 1 (one) relay function
- c) 1 (one) trip relay
- d)
- e) 1 (one) earthing switch
- f) 1 (one) bay control unit
- g) 1 (one) set of busbars
- h) 1 (one) set of wiring, terminal blocks, etc. to form a complete bay control.

#### **4.2.6.5 Current Transformers for Neutral current measurements**

- (a) 1(one) current transformers for neutral current measurements

#### **4.2.6.6 Lightning Arresters**

- (a) 66kV / 33kV lightning arrestors erected close to HV side of power Transformer
- (b) 33/ 11 kV lightning arrestors erected close to LV side of power transformer

#### **4.2.7 Auxiliary transformer for 33/11kV Substations and 66/11kV Substations**

- (a) 1 (one) 33/0.415 kV 100 kVA, Dyn11 Auxiliary transformer with built on low voltage fuses shall be installed outdoor on the 33kV Busbar of 33/11kV Substations..
- (b) 2 (two) 11/0.415kV 100kVA, Dyn11 Auxiliary transformers shall be installed in the 66/11kV Substations. The transformers shall be installed outdoor and must be of enclosed bushing type.

#### **4.2.8 MV Power Cables from Power Transformer to 11kV indoor Switchgear**

- (a) 1 (one) lot of 11 kV cable from main transformers to 11 kV switchgear, rated for 120 % of nominal transformer rating
- (b) 1 (one) lot of 11 kV cable terminations for transformer and switchgear connection
- (c) 1 (one) lot of support structures for lightning arresters and transformer connection
- (d) 1 (one) lot of 11 kV cable from switchgear to auxiliary transformer
- (e) 1 (one) lot of 11 kV cable terminations for auxiliary transformer and switchgear connection
- (f) 1 (one) lot of support structures for auxiliary transformer.

#### **4.2.9 MV Power Cables from Indoor Switchgear to line termination tower**

- a) 1 (one) lot of 11 kV cable from indoor 11 kV switchgear to terminal tower
- b) 1 (one) lot of 11 kV cable terminations for switchgear connection and line connection
- c) 1 (one) lot of support structures for cable terminations in terminal tower and surge arrestors

#### **4.2.10 Control, Protection, Metering and Signalling**

##### **4.2.10.1 Substation Automation System**

###### **General**

1 (one) lot of complete Substation Automation system (equipment and software) for substation control.

To the extent the internal control and interlocking system for the equipment supplied is not included for that particular equipment, it shall be included herein. All interconnections needed to form a complete installation shall also be included herein.

The control system specified hereunder shall include all necessary equipment for control, protection, metering and signalling. The system shall include all instruments, meters, switches, position indicators, inscriptions and mimic diagrams, protective and auxiliary relays, terminal blocks, internal wiring and any other equipment required to form a complete installation.

Drawings showing the control system, protection units and the boards as they are proposed shall be supplied with the Bid.

The space needed for the boards should not exceed the available space.

Information defining the internal local control communication protocol shall be submitted with the Bid.

Complete sets of schematic diagrams for control, protection, indication, metering, signalling, alarms, etc. shall be supplied as part of the project and shall be subject to the Project Manager's approval.

The requirements as to submission of diagrams, drawings and other documents with the Bid and after award of Contract are stated in the standard form of contract.

#### **4.2.10.1.1 Scope.**

The supply and services to be performed by the Contractor shall comprise the design, manufacture, factory testing, packing, transport, insurance, unloading, storage on Site, construction works and erection, corrosion protection, site testing, submission of documentation, commissioning, training of KPLC's personnel and warranty of the works.

The proposed SA system for the above work should offer at least the following functionality: -

- Full operational control, reporting, alarm and indication facilities for the substation from the RCC's (Supervisory level).
- Full operational control, alarm and indication facilities for the substation from the Human Machine interface (HMI) workstations in the substation control room (Substation Level).
- Operational control of each new circuit/bay from the protection relay panel using the bay control unit LCD display (Bay level).
- Control of each item of plant from the Local Control Cubicle (LCC) (Local Level)
- The control facilities from each control point are to be interlocked (hardwired) to prevent operation of any device simultaneously from more than one control point.
- At least one fully operational control point shall remain available in the event of a single equipment or communications failure.
- Complete facilities must exist for the proper lockout and maintenance tagging of circuits and plant items to ensure the safety of personnel and the security of the system
- The SA system shall use open communication protocols (IEC61850, IEC60870-101/104) and be readily interfaced with third party devices operating on open protocols. The Tenderer shall describe such interfaces and provide an experience list of devices with which the offered control system has previously been interfaced.
- The works shall include complete integration of the SAS to existing SCADA System.

The SAS shall typically include:

Station Level:

- 2 Independent Gateways (Main and Hot-standby) for communications to the SCADA system- for stations with 23 MVA transformation, while lower transformation capacity will not be equipped with Hot Standby.
- Configuration and parameterization software with onetime licences fully paid.
- 
- 1 Operator Workstation/HMI-OWS, and the complete workplace (desk, chair & File cabinet).
- 1 Engineering Work Station-EWS (Industrial) to be installed in Panel.
- 
- Color printer. To print screen shots



- Satellite clock, complete with GPS Receiver, Antenna and necessary time synchronization ports.
- Interface for laptop computer for maintenance, information transfer and emergencyHMI
- Laptop Computer for maintenance, information transfer and emergencyHMI
- UPS system SAS(including OWS, EWS and Printers),
- Communication network equipment [station (system) LAN, Field Communication Network, Various optical couplers, etc.].
- interface for control and monitoring of the circuit/bay

#### **4.2.10.2 SCADA Interface**

- (a) 1 (one) lot complete system (equipment and software), with communication gateway, data concentrator etc. for interface to the Regional (RCC) SCADA system and to the National (NCC) SCADA system using IEC60870-101/104protocols.
- (b) The works shall include integration to existing SCADA.

#### **4.2.10.3 Control and Measuring Cables**

- (a) All external cables, conventional or fibre optical, for control, protection, measuring, indication, etc., for the complete plant. Wiring between the switchyard apparatus, transformers, the board(s) and the control system in the control building and the interconnections between the various apparatus in the switchyard shall be included.

#### **4.2.10.4 Telecommunications**

- a) This shall include all necessary equipment in substations and Control Centres as described in 4.1.6
- b) In order for the SCADA data to be transferred to the Regional control centres, the bidder shall design and commission an appropriate communication system based on Fibre, PLC, Radio or other approved communication media for data and speech requirement.

Equipment supplied shall be digital and latest technology and shall comply to the latest ITU-T, IEC, ITU-R, IEEE and ETSI standards.

It is required that one remote subscriber be implemented in each substation. Interface for data transmission shall be according to ITU-T recommendation V.24 or V.35  
Bit error rates of  $1 \times 10^{-6}$  shall not be exceeded.

- c) It is the responsibility of the contractor to interconnect with existing SCADA and Telecommunications system. However use and extension of existing infrastructure where possible shall be encouraged.

- d) The Tenderer shall acquaint himself with all the sites and determine the requirements for towers or masts to suit his design. When a new tower or mast is necessary is necessary, the Tenderer shall supply drawings for the proposed installation. All towers shall be 36 m and self supporting. The tenderer shall provide details of loading and guy stresses for masts or towers to be erected on buildings. All antennae mounting components including wave-guides, cables, cable clamps and external cable connectors shall be specified.
- e) Where PLCs are to be used or where the T-offs affect existing PLC communication links, blocking line-traps including support structures shall be in scope of supply.
- f) All communications equipment installed in the country must be type approved by the Communications Authority of Kenya (CAK). The Contractor will obtain the type approval.  
The CAK has to be consulted and give approval for each new project and an application has to be submitted stating the location of the sites and request for the frequencies to be used. Unless otherwise stated this application for frequencies is normally done by KPLC.  
The radio frequency plan shall be prepared by the Contractor and closely coordinated with KPLC during the project design stage. All path surveys shall be carried out by contractor.
- g) The Contractor shall provide a list of recommended spares, the quantities and prices to last for a period of five (5) years after expiry of guarantee period.
- h) The contractor shall offer training for four (4) technical appointees of the employer for 2 weeks at manufacturer's premises. The contractor shall provide necessary configuration software pre-installed on a maintenance laptop with a onetime software license.

#### **4.2.10.4.1 Scope of works - Telecommunication**

The scope includes detailed system design, manufacture, supply, installation, testing, commissioning, remedying of defects, maintaining the works during the defects liability period and any incidental work necessary for the proper completion of the work in accordance with this contract. Scope shall include integration of STM-1, PLC and Radio links to the existing KPLC Network Management System. In some cases there shall be need to upgrade existing Telecommunication equipment in order to achieve data and speech routing to Regional and National control centres. Survey and necessary preparation works on existing systems, Equipment and substations to achieve specified functionality shall be in the scope of supply. The contractor shall determine and include in scope of supply, the necessary radio towers heights, Line traps, Line matching Units and Blocking line traps where required and their support structures. Contractors shall be required to submit for approval detailed design of system before manufacture.

In addition all substations (irrespective of whether SCADA functionality to control centre is established) shall be equipped with a Base Radio capable of communicating with the ASTRO trunking radio system for use during switching operations. Where OLTEs are the terminal equipment, additional Ethernet capability shall be established to cater for other

corporate data. All stations shall be equipped with two (2N0.) telephone extensions originating from existing PAXes in Regional control centres.

All communication equipment supplied under this project shall be typeapproved by the regulator, Communication Authority of Kenya (CAK) and the Kenya Bureau of Standards (KBS) where applicable. It is the responsibility of the contractor to obtain these necessary approvals.

#### **4.2.11 Auxiliary AC Supply Equipment**

##### **4.2.11.1 Main AC Distribution Board**

1 (one) main distribution board designed for minimum 200 A rating with necessary number of panels as indicated below: A Change Over scheme for two 415VAC supply sources to be incorporated. Auto Change Over scheme for 23MVA transformation capacity substations and above.

:

- (a) 1 (one) circuit breaker, manual /autooperation incorporated, minimum 200 A, for the feeder from the station supply transformer.
- (b) 2 (two) current transformers 200/1/1 A with two cores, one core for measuring and one for protection.
- (c) 1 (one) constant time overcurrent relay.
- (d) 1 (one) earth fault relay.
- (e) 1 (one) A-meter function with selector switch.
- (f) 1 (one) V-meter function with selector switch.
- (g) 1 (one) lot of feeder circuit breakers with electro-magnetic and thermal releases. The breaker ratings shall be chosen to suit the different consumers to be connected. 20% of the breakers of each size shall be spare and readily mounted.

##### **4.2.11.2 Sub-distribution Boards and Panels**

- (a) 1 (one) lot of all necessary sub-distribution boards and panels (including the distribution panel for lighting and small power of the control building).

The boards shall be completely equipped with busbars, circuit breakers, miniature circuit breakers etc. Contactors, motor starters, instruments, operating switches, push buttons, indicating lamps, etc., shall be included whenever required. 20% of the breakers of each size shall be spare and readily mounted.

##### **4.2.11.3 Cables**

- (a) 1 (one) lot of all necessary armoured power and control cables for supply to the main distribution board and to the sub-distribution boards, panels and equipment except for the cables for lighting and small power which are included in the civil Goods under separate contract.

#### **4.2.12 DC Supply System**

##### **4.2.12.1 Battery**

- i. (1 (one) 110 V battery. Capacity at least 200 Ah/10h for substations with more than 10 MVA installation of transformer capacity
- ii. The 48V batteries shall be included in the bid for communication equipment and the RTU. The battery shall be at least 100Ah/10h

The capacities to be recommended by the Bidder, based upon the calculated consumption considering a fully developed substation.

Batteries shall be installed in separate room with explosion proof ventilation fan (for 110 V batteries only).

##### **4.2.12.2 Charger**

- (a) 1 (one) DC charger for the 110 V battery.
- (b) 1 (one) DC charger for the 48 V Battery.

The chargers shall be complete with instruments, breakers on AC and DC side, and protection. The chargers shall have auxillary contacts for collection of status, alarms and measurands for the SCADA system.

##### **4.2.12.3 Switchboard**

- 1 (one) switchboard 110 V DC.

The board shall have:

- (a) 1 (one) circuit breaker with magnetic and thermal release for the feeder from earache charger and battery.
- (b) 1 (one) A-meter with shunt for each battery.
- (c) 1 (one) V-meter with selector switch for the voltage between the poles and between poles and earth for each battery.
- (d) 1 (one) set of contacts on the front for banana jacks for the battery voltage and earth.
- (e) 1 (one) battery monitoring devices with alarm contacts.
- (f) 1 (one) lot of all necessary circuit breakers and miniature circuit breakers for the outgoing feeders and circuits.

20% of the breakers of any size shall be spare and readily mounted.

##### **4.2.12.4 Battery Conductors and Fuses**

- (a) 1 (one) set of conductors for the battery in the battery room.
- (b) 2 (two) single pole fuse boxes with main fuses for the battery, placed on the wall outside of the battery room, and two fuses for the battery monitoring device.

#### **4.2.12.5 Sub-distribution Boards and Panels**

- (a) 1 (one) lot of all necessary sub-distribution boards and panels.

The boards shall be completely equipped with busbars, miniature circuit breakers, fuses, etc. Contactors, motor starters, instruments, operating switches, push buttons, indicating lamps, under-voltage relays with alarm contact, etc., shall be included whenever needed.

#### **4.2.12.6 Cables**

- (a) 1 (one) lot of all necessary DC power supply cables, including wiring to the apparatus in the switchyard.

#### **4.2.13 Earthing System**

An earthing network shall be installed comprising the following:

- (a) 1 (one) lot of underground earthing system covering the platform and control building with risers
- (b) 1 (one) complete set of "above-floor" earthing system for the control building, as applicable, with connections to the risers from the under-ground system.

#### **4.2.14 Ancillary Equipment**

##### **4.2.14.1 Station Equipment**

- (a) 2 (two) self-contained, rechargeable, portable hand-held lights.
- (b) 1 (one) audible alarm system with the necessary wiring.
- (c) Emergency lighting to be provided in the substation building.

##### **4.2.14.2 Earthing Devices**

- (a) 1 (one) set of three phase portable earthing devices for outdoor 66kV, 33kV and 11kV with operating rods /link sticks suitable for earthing of the bay conductors and busbars.
- (b) 1 (one) set of voltage indicators for 66kV, 33 kV and 11KV with audible and visual indication for voltage

##### **4.2.14.3 Cable Accessories**

- (a) 1 (one) lot of all connecting material, cable boxes and material for fixing the cables.

Terminals and terminal labels to the extent that this is not included in other sections.

##### **4.2.14.4 Racks, Conduits, Ducts, etc**

- (a) 1 (one) lot of all cables, racks and trays to the extent necessary for the proper distribution of cables.

All the conduits and protection tubes, wherever cables may deteriorate or where cable laying may otherwise present difficulties.

**4.2.15 Power transformers**

To be supplied as specified for each sub station, and in accordance with below data.

**4.2.1.1 Type of transformers**

Main data for the transformers that shall be supplied:

| Pos. | Rating MVA<br>(ONAN/ONAF) | Voltage | Tapping range | OLTC |
|------|---------------------------|---------|---------------|------|
| 1    | 35/45                     | 66/11   | ±8 x 1.67%    | yes  |
| 2    | 18/23                     | 132/33  | ±8 x 1.67%    | yes  |
| 3    | 18/23                     | 66/11   | ±8 x 1.67%    | yes  |
| 4    | 18/23                     | 33/11   | ±8 x 1.67%    | yes  |
| 5    | 15/n.a                    | 132/33  | ±8 x 1.67%    | yes  |
| 6    | 7.5/n.a                   | 33/11   | ±8 x 1.67%    | yes  |
| 7    | 2.5/n.a                   | 33/11   | ± 2*2.5 %     | no   |

**Transformers in Coastal region-** shall be of vector group: Ynynd1 (with stabilizing winding).

**Transformers in Nairobi region-** shall be of vector group: Dyn1

**Transformers in Mt Kenyaregion -** shall be of vector group: Dyn1

**Transformers in West Kenyaregion** shall be of vector group: Dyn11

**4.2.16 Civil Works**

**4.2.16.1 Platform works**

Platform with perimeter wall, earthworks, fence roads and drainages shall be constructed as specified in particular specifications

**4.2.16.2 Switchgear buildings**

Switchgear buildings shall be constructed as specified in particular specifications. Control Panels and medium voltage indoor switchgears of different Voltage levels shall be installed in separate rooms  
 In addition, a guardhouse with toilet facilities located at the main gate shall be constructed.

**4.2.16.3 Transformer foundations**

Transformer foundations shall be constructed as specified in particular specifications.

#### **4.2.16.4 Cable Trenches**

Cable trenches shall be constructed as specified in particular specifications

#### **4.2.17 Training in Major Equipment,**

The training shall be for 3 (three) KPLC engineers for each of the courses indicated below. as well as all course material and other expenses acquired by the Contractor. The training shall be held at the manufacturer's. All training, air fare and transport costs at manufacturer's premises shall be met by the Contractor. KPLC will meet the accommodation costs. The training shall cover design, application, testing, commissioning and maintenance of the relevant digital control and protection systems. The training course shall have a minimum of 2 (two) weeks duration. The training shall be for:

- Principles of Substation Design & Construction,
- SAS,
- Telecommunications
- Protection

#### **4.2.18 Factory Acceptance Test**

The Contractor shall arrange for 2 participants from KPLC and the Project Manager to witness tests of major equipment listed below in the manufacturer's plant. All routine tests shall be carried out in the presence of the Employer's representatives. The Contractor shall arrange and meet the full cost of the air tickets and local transportation. The cost of accommodation shall be met by KPLC.

- **Circuit breakers/ Autoreclosers**
- **Protection and control system**
- **Transformers**
- **Indoor switchgear**
- **Power Cables / Conductors**
- **Instrument transformers**
- **Disconnectors/ Isolators**
- **SAS**
- **Telecommunications Equipment**

FAT shall be carried out as prescribed in the particular technical specifications of the equipment. The cost of per diem and accommodation shall be met by KPLC.

#### **4.2.19 Test Equipment (TS –0034)**

This shall be as described in Particular Technical specifications of all the major equipment..

#### **4.2.20 Final documentation**

- a) Witnessed commissioning tests carried out.

- b) Signed Test results for all major equipment.
  
- c) As built drawings: in4 paper copies delivered in box files as approved by project manager;**4 CD-ROM copy (all drawings in AutoCAD and PDF)**
  
- d) Operation and maintenance manuals in4 paper copies delivered in box files as approved by project manager;**4 CD-ROM copy**
- e) Installation CDs and configured files for all SAS and protection equipment

#### **4.2.21 Facilities for the project Manager**

##### **Site Offices**

At the location where the Contractor will establish his main site administration, an office for site supervisors from the Project Manager with basic office furniture, internet, telephone and access/use of fax and copier shall be provided by the contractor for the implementation period

##### **Communication Facilities**

2 No. Pre-paid phone and Air-time equivalent to KES 20,000/= per month for Project manager and supervisor.

##### **Transport**

The Contractor shall avail transport on a 24 hour basis to site for the Project Manager for the duration of the Contract.

## **NAIROBI REGION**



#### 4.2.22 LOT 1

##### 4.2.22.1 KISERIAN

New substation, Two new transformer 23 MVA, 66/11 kV shall be installed. The station shall have 1 source\_66kV Line : from Ngong BSP220/66kV S/S .The works shall include the additional Line bay in these Remote station and the integration of the SCADA to the existing station system at Ngong 220/66kV S/S.

| Item       | Description  | Unit | Qty |  |  |
|------------|--|------|-----|--|--|
| KISE-001   | 23 MVA, 66/11 kV Transformer   | pc   | 2   |  |  |
| KISE-002   | 66 kV Circuit Breaker  | pc   | 4   |  |  |
| KISE -003  | 66 kV Motorized Isolator w/o E/S   | pc   | 6   |  |  |
| KISE -004  | 66 kV Motorized Isolator with E/.S   | pc   | 2   |  |  |
| KISE- 005  | 66 kV Current Transformer  | pc   | 12  |  |  |
| KISE-006   | 66 kV Voltage Transformer  | pc   | 12  |  |  |
| KISE - 007 | 66 kV Bay and Busbar Material  | lot  | 1   |  |  |
| KISE - 008 | Steel Structures for support   | lot  | 1   |  |  |
| KISE - 009 | 66 kV Surge Arresters  | pc   | 12  |  |  |
| KISE - 010 | Transformer Protection Panel   | pc   | 2   |  |  |
| KISE - 011 | Tap Changer Panel  | pc   | 2   |  |  |
| KISE - 012 | 66 kV Transformer Control Panel  | pc   | 2   |  |  |
| KISE - 013 | Line Protection Panel  | pc   | 2   |  |  |
| KISE - 014 | 66 kV Line Control Panel   | pc   | 2   |  |  |
| KISE - 015 | 11 kV Neutral Current Transformer  | pc   | 2   |  |  |
| KISE - 016 | 11 kV Neutral Link   | pc   | 2   |  |  |
| KISE - 017 | 11 kV Surge Arresters  | pc   | 30  |  |  |
| KISE - 018 | Auxiliary transformer 100 kVA, 11/0.415 kV   | pc   | 2   |  |  |
| KISE - 019 | Switch Board Panel with 11 kV Fuse Switch for auxiliary transformer  | pc   | 2   |  |  |
| KISE-020   | Switch Board Panel for 11 kV Feeder - 8 feeders (6 feeders + 2 spare) + 2 switchboard panels for capacitor banks | pc   | 10  |  |  |
| KISE - 021 | Switch Board Panel for 11 kV Bus section   | pc   | 1   |  |  |
| KISE - 022 | MV Power Cables between Transformer and switchgear, S/C 630mm Sq Cu  | lot  | 1   |  |  |
| KISE - 023 | Substation control Management system (SCMS)  | lot  | 1   |  |  |
| KISE - 024 | Control and measuring cables   | lot  | 1   |  |  |
|            | Auxiliary AC supply  | lot  | 1   |  |  |

|            |   |        |      |  |  |
|------------|---|--------|------|--|--|
| KISE – 025 | DC supply System 110VDC C/W Charger   | lot    | 1    |  |  |
| KISE – 026 | DC supply System 48VDC C/W Charger  | lot    | 1    |  |  |
| KISE – 027 | Earthing system   | lot    | 1    |  |  |
| KISE – 028 | Ancillary Equipment   | lot    | 1    |  |  |
| KISE – 029 | Switchyard Lighting System  | lot    | 2    |  |  |
| KISE – 030 | MV Power Cables between indoor switchgear and line termination tower including termination kits for both ends of cable (11 kV 3/C Cables, 300 mm <sup>2</sup> AL) | meters | 2000 |  |  |
| KISE-031   | Telecommunication system and associated accessories   | Lot    | 1    |  |  |
| KISE-032   | Lightning protection system   | Lot    | 1    |  |  |
| KISE-032R  | Complete 66kV Bay at Ngong 220/66kV   | Lot    | 1    |  |  |

|            | <b>Works</b>  |     |   |
|------------|---|-----|---|
| KISE - 101 | Transformer Foundation  | Lot | 1 |
| KISE – 102 | Switchgear and Control Building   | Lot | 1 |
| KISE – 103 | Platform Works ( Earth works, foundations, trenches, fence etc )        | Lot | 1 |
| KISE – 104 | Cable trenches ( Excavating, protection, backfillingetc)                | Lot | 1 |
| KISE – 105 | Erection and commissioning  | Lot | 1 |
| KISE – 106 | Guardhouse and Toilet   | Lot | 1 |
| KISE -107  | Telecommunications system installation and commissioning                | LOT | 1 |
| KISE – 108 | Telecommunications system installation , intergration and commissioning | Lot | 1 |
| KISE – 109 | SCADA system installation, intergration and commissioning               | Lot | 1 |
| KISE - 110 | Site Clearing & Disposal for Site                                       | Lot | 1 |
| KISE-111R  | Establishment of 66kV bay at Ngong 220/66kV s/s                         | Lot | 1 |

#### 4.2.22.2 KITENGELA

New substation, Two new transformer 23 MVA, 66/11 kV shall be installed. The Incoming 66KV Line shall be a single circuit from EPZ-Kitengela66kV Line.. The works shall also include the intergration of the Telecommunication to the existing station systems at EPZ66/11kV S/S.

| Item       | Description  | Unit   | Qty  |
|------------|--|--------|------|
| KITE-001   | 23 MVA, 66/11 kV Transformer   | pc     | 2    |
| KITE-002   | 66 kV Circuit Breaker  | pc     | 4    |
| KITE -003  | 66 kV Motorized Isolator w/o E/S   | pc     | 6    |
| KITE -004  | 66 kV Motorized Isolator with E/S  | pc     | 2    |
| KITE- 005  | 66 kV Current Transformer  | pc     | 12   |
| KITE-006   | 66 kV Voltage Transformer  | pc     | 12   |
| KITE - 007 | 66 kV Bay and Busbar Material  | lot    | 1    |
| KITE - 008 | Steel Structures for support   | lot    | 1    |
| KITE - 009 | 66 kV Surge Arresters  | pc     | 12   |
| KITE - 010 | Transformer Protection Panel   | pc     | 2    |
| KITE - 011 | Tap Changer Panel  | pc     | 2    |
| KITE - 012 | 66 kV Transformer Control Panel  | pc     | 2    |
| KITE - 013 | Line Protection Panel  | pc     | 2    |
| KITE - 014 | 66 kV Line Control Panel   | pc     | 2    |
| KITE - 015 | 11 kV Neutral Current Transformer  | pc     | 2    |
| KITE - 016 | 11 kV Neutral Link   | pc     | 2    |
| KITE - 017 | 11 kV Surge Arresters  | pc     | 30   |
| KITE - 018 | Auxiliary transformer 100 kVA, 11/0.415 kV   | pc     | 2    |
| KITE - 019 | Switch Board Panel with 11 kV Fuse Switch for auxiliary transformer  | pc     | 2    |
| KITE-020   | Switch Board Panel for 11 kV Feeder - 8 feeders (6 feeders + 2 spare) + 2 switchboard panels for capacitor banks | pc     | 10   |
| KITE - 021 | Switch Board Panel for 11 kV Bus section   | pc     | 1    |
| KITE - 022 | MV Power Cables between Transformer and switchgear, S/C 630mm Sq Cu.   | lot    | 1    |
| KITE - 023 | Substation control Management system (SCMS)  | lot    | 1    |
| KITE - 024 | Control and measuring cables   | lot    | 1    |
|            | Auxiliary AC supply  | lot    | 1    |
| KITE - 025 | DC supply System 110VDC C/W Charger  | lot    | 1    |
| KITE - 026 | DC supply System 48VDC C/W Charger   | lot    | 1    |
| KITE - 027 | Earthing system  | lot    | 1    |
| KITE - 028 | Ancillary Equipment  | lot    | 1    |
| KITE - 029 | Switchyard Lighting System   | lot    | 2    |
| KITE - 030 | MV Power Cables between indoor   | meters | 2000 |

|            |  |     |   |
|------------|--|-----|---|
|            | switchgear and line termination tower including termination kits for both ends of cable (11 kV 3/C Cables, 300 mm <sup>2</sup> Al) |     |   |
| KITE-031   | Telecommunication system and associated accessories  | Lot | 1 |
| KITE-032   | Lightning protection system  | Lot | 1 |
| KITE-033R  | Complete 66kV Bay at Ngong 220/66kV  | Lot | 1 |
|            | <b>Works</b>   |     |   |
| KITE - 101 | Transformer Foundation   | Lot | 1 |
| KITE – 102 | Switchgear and Control Building  | Lot | 1 |
| KITE – 103 | Platform Works ( Earth works, foundations, trenches, fence etc )   | Lot | 1 |
| KITE – 104 | Cable trenches ( Excavating, protection, backfillingetc)   | Lot | 1 |
| KITE – 105 | Erection and commissioning   | Lot | 1 |
| KITE – 106 | Guardhouse and Toilet  | Lot | 1 |
| KITE -107  | Telecommunications system installation and commissioning   | LOT | 1 |
| KITE – 108 | Telecommunications system installation , intergration and commissioning  | Lot | 1 |
| KITE – 109 | SCADA system installation, intergration and commissioning  | Lot | 1 |
| KITE – 110 | Site Clearing & Disposal for Site  | Lot | 1 |
| KITE-111R  | Establishment of 66kV bay at Ngong 220/66kV s/s  | Lot | 1 |

#### 4.2.22.3 MWIHOKO

New substation, Two new transformers shall be installed 2x23 MVA, 66/11 kV. An new 66/kV line will be constructed from Ruaraka BSP-Mwihoko. The works shall also include the intergration of the Telecommunication to the existing systems at Ruaraka BSP.

| Item No   | Item Description                   | Unit | Qty |
|-----------|------------------------------------|------|-----|
| MWHK–001  | 23 MVA, 66/11 kV Transformer       | pc   | 2   |
| MWHK–002  | 66 kV Circuit Breaker              | pc   | 4   |
| MWHK –003 | 66 kV Motorized Isolator w/o E/S   | pc   | 6   |
| MWHK –004 | 66 kV Motorized Isolator with E/.S | pc   | 2   |
| MWHK- 005 | 66 kV Current Transformer          | pc   | 12  |
| MWHK–006  | 66 kV Voltage Transformer          | pc   | 12  |

| Item No    | Item Description  | Unit   | Qty  |
|------------|---|--------|------|
| MWHK – 007 | 66 kV Bay and Busbar Material   | lot    | 1    |
| MWHK – 008 | Steel Structures for support  | lot    | 1    |
| MWHK – 009 | 66 kV Surge Arresters   | pc     | 12   |
| MWHK – 010 | Transformer Protection Panel  | pc     | 2    |
| MWHK – 011 | Tap Changer Panel   | pc     | 2    |
| MWHK – 012 | 66 kV Transformer Control Panel   | pc     | 2    |
| MWHK – 013 | Line Protection Panel   | pc     | 2    |
| MWHK – 014 | 66 kV Line Control Panel  | pc     | 2    |
| MWHK – 015 | 11 kV Neutral Current Transformer   | pc     | 2    |
| MWHK – 016 | 11 kV Neutral Link  | pc     | 2    |
| MWHK – 017 | 11 kV Surge Arresters   | pc     | 30   |
| MWHK – 018 | Auxiliary transformer 100 kVA, 11/0.415 kV  | pc     | 2    |
| MWHK – 019 | Switch Board Panel with 11 kV Fuse Switch for auxiliary transformer   | pc     | 2    |
| MWHK-020   | Switch Board Panel for 11 kV Feeder - 8 feeders (6 feeders + 2 spare) + 2 switchboard panels for capacitor banks  | pc     | 10   |
| MWHK – 021 | Switch Board Panel for 11 kV Bus section  | pc     | 1    |
| MWHK – 022 | MV Power Cables between Transformer and switchgear, S/C 630mm Sq Cu.  | lot    | 1    |
| MWHK – 023 | Substation control Management system (SCMS)   | lot    | 1    |
| MWHK – 024 | Control and measuring cables  | lot    | 1    |
|            | Auxiliary AC supply   | lot    | 1    |
| MWHK – 025 | DC supply System 110VDC C/W Charger   | lot    | 1    |
| MWHK – 026 | DC supply System 48VDC C/W Charger  | lot    | 1    |
| MWHK – 027 | Earthing system   | lot    | 1    |
| MWHK – 028 | Ancillary Equipment   | lot    | 1    |
| MWHK – 029 | Switchyard Lighting System  | lot    | 2    |
| MWHK – 030 | MV Power Cables between indoor switchgear and line termination tower including termination kits for both ends of cable (11 kV 3/C Cables, 300 mm <sup>2</sup> Al) | meters | 2000 |
| MWHK-031   | Telecommunication system and associated accessories   | Lot    | 1    |
| MWHK-032   | Lightning protection system   | Lot    | 1    |
| MWHK-033R  | Complete 66kV Bay at Ruaraka 132/66kV   | Lot    | 1    |
|            |   |        |      |
|            | <b>Works</b>  |        |      |
| MWHK - 101 | Transformer Foundation  | Lot    | 1    |

| Item No    | Item Description  | Unit | Qty |
|------------|---|------|-----|
| MWHK – 102 | Switchgear and Control Building   | Lot  | 1   |
| MWHK – 103 | Platform Works ( Earth works, foundations, trenches, fence etc )        | Lot  | 1   |
| MWHK – 104 | Cable trenches ( Excavating, protection, backfillingetc)                | Lot  | 1   |
| MWHK – 105 | Erection and commissioning  | Lot  | 1   |
| MWHK – 106 | Guardhouse and Toilet   | Lot  | 1   |
| MWHK -107  | Telecommunications system installation and commissioning                | LOT  | 1   |
| MWHK – 108 | Telecommunications system installation , intergration and commissioning | Lot  | 1   |
| MWHK – 109 | SCADA system installation, intergration and commissioning               | Lot  | 1   |
| MWHK – 110 | Site Clearing & Disposal for Site                                       | Lot  | 1   |
| MWHK-111R  | Establishment of 66kV bay at Ngong 220/66kV s/s                         | Lot  | 1   |

#### 4.2.22.4 UMOJA

New substation, Two new transformer 23 MVA, 66/11 kV shall be installed. The Incoming 66KV Line shall be a single circuit from the Komorok-Umoja66kV Line. The works shall also include the intergration of the Telecommunication to the existing station systems at Umoja66/11kV S/S

| Item       | Description                        | Unit | Qty |
|------------|------------------------------------|------|-----|
| UMOJ-001   | 23 MVA, 66/11 kV Transformer       | pc   | 2   |
| UMOJ-002   | 66 kV Circuit Breaker              | pc   | 4   |
| UMOJ –003  | 66 kV Motorized Isolator w/o E/S   | pc   | 6   |
| UMOJ –004  | 66 kV Motorized Isolator with E/.S | pc   | 2   |
| UMOJ- 005  | 66 kV Current Transformer          | pc   | 12  |
| UMOJ-006   | 66 kV Voltage Transformer          | pc   | 12  |
| UMOJ – 007 | 66 kV Bay and Busbar Material      | lot  | 1   |
| UMOJ – 008 | Steel Structures for support       | lot  | 1   |
| UMOJ – 009 | 66 kV Surge Arresters              | pc   | 12  |
| UMOJ – 010 | Transformer Protection Panel       | pc   | 2   |
| UMOJ – 011 | Tap Changer Panel                  | pc   | 2   |
| UMOJ – 012 | 66 kV Transformer Control Panel    | pc   | 2   |

|            |   |        |      |
|------------|---|--------|------|
| UMOJ – 013 | Line Protection Panel   | pc     | 2    |
| UMOJ – 014 | 66 kV Line Control Panel  | pc     | 2    |
| UMOJ – 015 | 11 kV Neutral Current Transformer   | pc     | 2    |
| UMOJ – 016 | 11 kV Neutral Link  | pc     | 2    |
| UMOJ – 017 | 11 kV Surge Arresters   | pc     | 30   |
| UMOJ – 018 | Auxiliary transformer 100 kVA, 11/0.415 kV  | pc     | 2    |
| UMOJ – 019 | Switch Board Panel with 11 kV Fuse Switch for auxiliary transformer   | pc     | 2    |
| UMOJ-020   | Switch Board Panel for 11 kV Feeder - 8 feeders (6 feeders + 2 spare) + 2 switchboard panels for capacitor banks  | pc     | 10   |
| UMOJ – 021 | Switch Board Panel for 11 kV Bus section  | pc     | 1    |
| UMOJ – 022 | MV Power Cables between Transformer and switchgear, S/C 630mm Sq Cu.  | lot    | 1    |
| UMOJ – 023 | Substation control Management system (SCMS)   | lot    | 1    |
| UMOJ – 024 | Control and measuring cables  | lot    | 1    |
|            | Auxiliary AC supply   | lot    | 1    |
| UMOJ – 025 | DC supply System 110VDC C/W Charger   | lot    | 1    |
| UMOJ – 026 | DC supply System 48VDC C/W Charger  | lot    | 1    |
| UMOJ – 027 | Earthing system   | lot    | 1    |
| UMOJ – 028 | Ancillary Equipment   | lot    | 1    |
| UMOJ – 029 | Switchyard Lighting System  | lot    | 2    |
| UMOJ – 030 | MV Power Cables between indoor switchgear and line termination tower including termination kits for both ends of cable (11 kV 3/C Cables, 300 mm <sup>2</sup> Al) | meters | 2000 |
| UMOJ-031   | Telecommunication system and associated accessories   | Lot    | 1    |
| UMOJ-032   | Lightning protection system   | Lot    | 1    |
| UMOJ-033R  | Complete 66kV Bay at Komorock 132/66kV  | Lot    | 1    |
|            | <b>Works</b>  |        |      |
| UMOJ - 101 | Transformer Foundation  | Lot    | 1    |

|            |   |     |   |
|------------|---|-----|---|
| UMOJ – 102 | Switchgear and Control Building   | Lot | 1 |
| UMOJ – 103 | Platform Works ( Earth works, foundations, trenches, fence etc )        | Lot | 1 |
| UMOJ – 104 | Cable trenches ( Excavating, protection, backfillingetc)                | Lot | 1 |
| UMOJ – 105 | Erection and commissioning  | Lot | 1 |
| UMOJ – 106 | Guardhouse and Toilet   | Lot | 1 |
| UMOJ -107  | Telecommunications system installation and commissioning                | LOT | 1 |
| UMOJ – 108 | Telecommunications system installation , intergration and commissioning | Lot | 1 |
| UMOJ – 109 | SCADA system installation, intergration and commissioning               | Lot | 1 |
| UMOJ – 110 | Site Clearing & Disposal for Site                                       | Lot | 1 |
| UMOJ-111R  | Establishment of 66kV bay at Komorock 66/11kV s/s                       | Lot | 1 |

#### 4.2.22.5 KANGUNDO

New substation, Two new transformer 23 MVA, 66/11 kV shall be installed. The Incoming 66KV Line shall be a single circuit from the Tala-66/11kV Line. The works shall also include the intergration of the Telecommunication to the existing system at Kangundo66/11kV S/S

| Item       | Description                        | Unit | Qty |
|------------|------------------------------------|------|-----|
| KANG–001   | 23 MVA, 66/11 kV Transformer       | pc   | 2   |
| KANG–002   | 66 kV Circuit Breaker              | pc   | 4   |
| KANG –003  | 66 kV Motorized Isolator w/o E/S   | pc   | 6   |
| KANG –004  | 66 kV Motorized Isolator with E/.S | pc   | 2   |
| KANG- 005  | 66 kV Current Transformer          | pc   | 12  |
| KANG–006   | 66 kV Voltage Transformer          | pc   | 12  |
| KANG – 007 | 66 kV Bay and Busbar Material      | lot  | 1   |
| KANG – 008 | Steel Structures for support       | lot  | 1   |
| KANG – 009 | 66 kV Surge Arresters              | pc   | 12  |
| KANG – 010 | Transformer Protection Panel       | pc   | 2   |
| KANG – 011 | Tap Changer Panel                  | pc   | 2   |
| KANG – 012 | 66 kV Transformer Control Panel    | pc   | 2   |
| KANG – 013 | Line Protection Panel              | pc   | 2   |



|            |   |        |      |
|------------|---|--------|------|
| KANG – 014 | 66 kV Line Control Panel  | pc     | 2    |
| KANG – 015 | 11 kV Neutral Current Transformer   | pc     | 2    |
| KANG – 016 | 11 kV Neutral Link  | pc     | 2    |
| KANG – 017 | 11 kV Surge Arresters   | pc     | 30   |
| KANG – 018 | Auxiliary transformer 100 kVA, 11/0.415 kV  | pc     | 2    |
| KANG – 019 | Switch Board Panel with 11 kV Fuse Switch for auxiliary transformer   | pc     | 2    |
| KANG-020   | Switch Board Panel for 11 kV Feeder - 8 feeders (6 feeders + 2 spare) + 2 switchboard panels for capacitor banks  | pc     | 10   |
| KANG – 021 | Switch Board Panel for 11 kV Bus section  | pc     | 1    |
| KANG – 022 | MV Power Cables between Transformer and switchgear, S/C 630mm Sq Cu.  | lot    | 1    |
| KANG – 023 | Substation control Management system (SCMS)   | lot    | 1    |
| KANG – 024 | Control and measuring cables  | lot    | 1    |
|            | Auxiliary AC supply   | lot    | 1    |
| KANG – 025 | DC supply System 110VDC C/W Charger   | lot    | 1    |
| KANG – 026 | DC supply System 48VDC C/W Charger  | lot    | 1    |
| KANG – 027 | Earthing system   | lot    | 1    |
| KANG – 028 | Ancillary Equipment   | lot    | 1    |
| KANG – 029 | Switchyard Lighting System  | lot    | 2    |
| KANG – 030 | MV Power Cables between indoor switchgear and line termination tower including termination kits for both ends of cable (11 kV 3/C Cables, 300 mm <sup>2</sup> Al) | meters | 2000 |
| KANG-031   | Telecommunication system and associated accessories   | Lot    | 1    |
| KANG-032   | Lightning protection system   | Lot    | 1    |
| KANG-033R  | Complete 66kV Bay at Tala 66/11kV   | Lot    | 1    |
|            | <b>Works</b>  |        |      |
| KANG - 101 | Transformer Foundation  | Lot    | 1    |
| KANG – 102 | Switchgear and Control Building   | Lot    | 1    |
| KANG – 103 | Platform Works ( Earth works, foundations, trenches, fence etc )  | Lot    | 1    |
| KANG – 104 | Cable trenches ( Excavating, protection, backfillingetc)  | Lot    | 1    |
| KANG – 105 | Erection and commissioning  | Lot    | 1    |

|            |   |     |   |
|------------|---|-----|---|
| KANG – 106 | Guardhouse and Toilet   | Lot | 1 |
| KANG -107  | Telecommunications system installation and commissioning                | LOT | 1 |
| KANG – 108 | Telecommunications system installation , intergration and commissioning | Lot | 1 |
| KANG – 109 | SCADA system installation, intergration and commissioning               | Lot | 1 |
| KANG – 110 | Site Clearing & Disposal for Site                                       | Lot | 1 |
| KANG-111R  | Establishment of 66kV bay at Tala 66/11kV s/s                           | Lot | 1 |

#### 4.2.23 Mandatory Spare Parts and Tools

All spares and tools specified below are to be of makes and types that match with the equipment in the scope of works, to the extent possible. Spares and Tools are to be delivered to KPLC's central stores in Nairobi.

##### 4.2.23.1 For Transformers

The following spares and tools are to be provided *for each type* of transformer offered:

| Item no. | Item Description                       | Unit | Quantity |
|----------|--|------|----------|
| ST-001   | Auxiliary relay of each type.          | Sets | 1        |
| ST-002   | Switches each type                     | Sets | 1        |
| ST-003   | Lamps each type                        | Sets | 6        |
| ST-004   | Contactors each type                   | Sets | 1        |
| ST-005   | Valve each type                        | Sets | 1        |
| ST-006   | Gaskets complete set                   | Sets | 1        |
| ST-007   | Silica gel (complete filling)          | Sets | 1        |
| ST-008   | Dial type thermometer                  | Sets | 1        |
| ST-009   | Mercury (or similar) thermometer       | Sets | 2        |
| ST-010   | Oil gauge each type                    | Sets | 1        |
| ST-011   | Gauge glass each type                  | Sets | 1        |
| ST-012   | Glass cylinder for silica gel breather | Sets | 1        |
| ST-013   | Bushing of each type                   | Sets | 1        |
|          |  |      |          |
|          | <b>Tools</b>                           |      |          |

| Item no. | Item Description                   | Unit | Quantity |
|----------|------------------------------------|------|----------|
| TT-001   | Complete set of slings for lifting | Sets | 1        |
|          |                                    |      |          |

#### 4.2.23.2 For Substations

| Item no. | Item Description  | Unit | Quantity |
|----------|---|------|----------|
|          | <b>Spares</b>   |      |          |
| SS-001   | 66 kV outdoor Circuit Breaker   | Sets | 1        |
| SS-002   | 11 kV indoor Circuit Breaker for feeder, complete on trolley/drawer                   | Sets | 1        |
| SS-003   | 11 kV indoor Circuit Breaker for incomer, where applicable complete on trolley/drawer | Sets | 1        |
|          |   | Sets | 1        |
| SS-004   | 66kV disconnectors  | Sets | 1        |
| SS-004   | Feeder protection units   | Sets | 1        |
| SS-004   | 66 kV Current Transformers  | Sets | 1        |
|          |   | Sets |          |
| SS-010a  | 66 kV Voltage Transformers  | Sets | 1        |
| SS-010b  | 11kV Fuses for Fuse Switches  | Sets | 10       |
|          | Transformer Protection unit for 66 kV transformer bay                                 | Sets | 1        |
| SS-011a  | Central Control unit of each type (where applicable)                                  | Sets | 1        |
| SS-011b  | SCADA interface unit of each type   | Sets | 1        |
|          | Auxiliary relays of matching type to ones used in offered equipment, assorted         | Sets | 16       |
| SS-014   | (Control) contactors of matching type to ones used in offered equipment, assorted     | Sets | 8        |
| SS-016a  | Assorted MCB's for AC and DC distribution boards                                      | Sets | 20       |
| SS-016b  | Trip coils for each type of Circuit Breaker   | Sets | 2        |
| SS-016   | Close coils for each type of Circuit Breaker  | Sets | 2        |
| SS-025   | Bay control unit  | Sets | 2        |
| SS-032   | 11KV VT each type   | Sets | 2        |
| SS-033   | 11 kV cable termination sets for 3/c 300 mm <sup>2</sup> cable                        | Sets | 10       |
| SS-034   | 11 kV cable jointing sets for 3/c 300 mm <sup>2</sup> cable                           | Sets | 5        |
| SS-035   | 11 kV cable termination sets for s/c 630 mm <sup>2</sup> cable                        | Sets | 2        |
| SS-036   | 11 kV cable jointing sets for s/c 630 mm <sup>2</sup> cable                           | Sets | 1        |
| SS-037   | 11 kV cable termination sets for s/c 800 mm <sup>2</sup> cable                        | Sets | 2        |
| SS-038   | 11 kV cable jointing sets for s/c 800 mm <sup>2</sup> cable                           | Sets | 1        |
| SS-039   | 66 kV cable termination sets for s/c 300 mm <sup>2</sup> cable                        | Sets | 10       |
| SS-040   | 66 kV cable jointing sets for s/c 300 mm <sup>2</sup> cable                           | Sets | 1        |
| SS-041   | Spares for Telecommunications system as specified                                     | Lot  | 1        |
|          |   |      |          |

| <b>Item no.</b> | <b>Item Description</b>      | <b>Unit</b> | <b>Quantity</b> |
|-----------------|------------------------------|-------------|-----------------|
|                 | <b><i>Tools</i></b>          |             |                 |
| TS-001          | Lap tops                     | sets        | 2               |
| TS-002          | SCADA and Telecommunications | sets        | 1               |
| TS-003          | Secondary Test Set           | No          | 1               |

#### **4.2.24 Recommended Spare Parts and Tools**

The Bidder shall recommend additional spares and tools suitable for the offered equipment. The prices are to be entered in Price schedule No. 6, which shall not be added to the Grand Summary Prices. The recommended spares and tools are to be specifically discussed and agreed on during contract negotiations

**SECTION VI**  
**TECHNICAL SCHEDULES**

---

|   |           |
|---|-----------|
| TECHNICAL SCHEDULES .....   | 1         |
| <i>PREAMBLE</i> .....   | 1         |
| <b>TECHNICAL SCHEDULES SUBSTATIONS .....</b>                                  | <b>2</b>  |
| <i>SCHEDULE VI-1a TECHNICAL GUARANTEES, OUTDOOR SWITCHGEAR</i> .....          | 2         |
| <i>SCHEDULE VI-2a TECHNICAL GUARANTEES, INDOOR MV INDOOR SWITCHGEAR</i> ..... | 10        |
| <i>SCHEDULE VI-2b INFORMATIVE DATA MV INDOOR VOLTAGE SWITCHGEAR</i> .....     | 14        |
| <i>SCHEDULE VI-2b INFORMATIVE DATA MV INDOOR VOLTAGE SWITCHGEAR</i> .....     | 17        |
| <i>SCHEDULE VI 3a TECHNICAL GUARANTEES, CONTROL SYSTEM</i> .....              | 20        |
| <i>SCHEDULE VI 3b INFORMATIVE DATA, CONTROL SYSTEM</i> .....                  | 21        |
| <i>SCHEDULE VI 4a TECHNICAL GUARANTEES, PROTECTION ETC.</i> .....             | 22        |
| <i>SCHEDULE VI 4b INFORMATIVE DATA, PROTECTION ETC.</i> .....                 | 28        |
| <i>SCHEDULE VI 5b INFORMATIVE DATA, CABLES</i> .....                          | 30        |
| <i>SCHEDULE VI 5b INFORMATIVE DATA, CABLES</i> .....                          | 31        |
| <i>SCHEDULE VI 6a TECHNICAL GUARANTEES, EARTHING</i> .....                    | 32        |
| <i>SCHEDULE VI 6b INFORMATIVE DATA, EARTHING</i> .....                        | 33        |
| <b>TECHNICAL SCHEDULES TRANSFORMERS.....</b>                                  | <b>34</b> |
| <i>SCHEDULE VI 7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS</i> .....        | 34        |
| <i>SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMERS</i> .....            | 41        |
| <i>SCHEDULE VI 8a - TECHNICAL GUARANTEES, DISTRIBUTION TRANSFORMERS</i> ..... | 50        |
| <i>SCHEDULE VI-8b - INFORMATIVE DATA, DISTRIBUTION TRANSFORMER</i> .....      | 52        |
| <b>SCHEDULE VI-9A- GAURANTEE DATA TELECOMMUNICATION SYSTE.....</b>            | <b>54</b> |
| <b>FIBER OPTIC CABLE.....</b>   | <b>54</b> |

## **TECHNICAL SCHEDULES**

### **PREAMBLE**

- 1.1 The Technical Schedules shall be filled in and completed by the Bidder, and submitted with the Bid. The type test reports and the relevant manufacturer's technical documents shall be provided for reference.
- 1.2 All documentation necessary to evaluate whether the equipment offered is in accordance with this Specification shall be submitted with the Bid.
- 1.3 All data entered in the Schedules of Technical Guarantees are guaranteed values by the Bidder and cannot be departed from whatsoever.
- 1.4 All data entered in the Schedules of Informative. Data are also guaranteed values by the Bidder. These data may only be altered following the Project Manager's written consent.

**TECHNICAL SCHEDULES SUBSTATIONS**

**SCHEDULE VI-1a TECHNICAL GUARANTEES, OUTDOOR SWITCHGEAR**

**Sheet 1 of 4**

| OUTDOOR SWITCHGEAR |   |                         | 33kV      | 66KV      | Reference Doc |
|--------------------|---|-------------------------|-----------|-----------|---------------|
| Item               | Particulars   | Unit                    | Guar. Fig | Guar. Fig |               |
| a.2                | <b>Circuit Breakers</b> (Type _____)                        |                         |           |           |               |
|                    | Breaking Medium   | SF <sub>6</sub> /Vacuum |           |           |               |
|                    | Manufacturer  |                         |           |           |               |
|                    | - Rated voltage   | kV                      |           |           |               |
|                    | - Maximum service voltage                                   | kV                      |           |           |               |
|                    | - Rated frequency   | Hz                      |           |           |               |
|                    | - Rated continuous current                                  | A                       |           |           |               |
|                    | - One minute power frequency withstand voltage, dry and wet |                         |           |           |               |
|                    | - to earth  | kV rms                  |           |           |               |
|                    | - across open breaker pole                                  | kV rms                  |           |           |               |
|                    | - Impulse withstand voltage 1.2/50 ms                       |                         |           |           |               |
|                    | - to earth  | kV peak                 |           |           |               |
|                    | - across open breaker                                       |                         |           |           |               |
|                    | - Breaking capacity at rated voltage                        |                         |           |           |               |
|                    | - symmetrical   | kA rms                  |           |           |               |
|                    | - asymmetrical  | kA rms                  |           |           |               |
|                    | - Making capacity   | kA peak                 |           |           |               |
|                    | - Breaking capacity of capacitive current                   | A                       |           |           |               |



**SCHEDULE VI-1a TECHNICAL GUARANTEES, OUTDOOR SWITCHGEAR** **Sheet 2 of 4**

| OUTDOOR SWITCHGEAR |   |   | 33 kV     |  |               |
|--------------------|---|---|-----------|--|---------------|
| Item               | Particulars   | Unit  | Guar. Fig |  | Reference Doc |
|                    | <p><b>Circuit breakers continued</b></p> <ul style="list-style-type: none"> <li>- Overvoltage factor for disconnection of unloaded transformers (without voltage limitation by lightning arresters)</li> <li>- Rated inductive current switching capacity</li> <li>- Permissible 1 second short-time current</li> <li>- Dynamic short-time current</li> <li>- Opening time, interval of time between the instant of application of tripping impulse to the instant when the main contacts have separated in all poles</li> <li>- Make time, interval of time between the initiation of closing operation and the instant when the current begins to flow in the main circuit</li> <li>- Total break time, interval of time between the instant of application of tripping impulse to the instant of final arc extinction in all poles                             <ul style="list-style-type: none"> <li>- at 100% breaking capacity</li> <li>- under phase opposition</li> </ul> </li> <li>- Rate of rise of recovery voltage (RRRV) at 100% short circuit current                             <ul style="list-style-type: none"> <li>- 3-phase</li> <li>- 1-phase</li> </ul> </li> <li>- RRRV out of phase duty</li> <li>- Minimum temperature rise at rated current of main contact</li> </ul> | <p>A</p> <p>kA rms</p> <p>kA peak</p> <p>m.sec.</p> <p>m.sec.</p> <p>m.sec.</p> <p>m.sec.</p> <p>kV/msec</p> <p>kV/msec</p> <p>°C</p> |           |  |               |
| a.3                | <p><b>Earthing Switches</b></p> <ul style="list-style-type: none"> <li>- Rated short-time current 1 sec.</li> <li>- Rated dynamic short-circuit current</li> <li>- Making Capacity</li> </ul>   | <p>kA rms</p>   |           |  |               |

| <b>Outdoor Switchgear</b>                                 |             | <b>33kV</b>              |                  |  |
|---|-------------|--------------------------|------------------|--|
| <b>Particulars</b>  | <b>Unit</b> | <b>Guaranteed figure</b> | <b>Tolerance</b> |  |
| <b>Autoreclosers</b>                                      |             |                          |                  |  |
| Breaking medium   |             |                          |                  |  |
| Manufacturer  |             |                          |                  |  |
| - Normal system voltage                                   |             |                          |                  |  |
| - Maximum service voltage                                 | kV          |                          |                  |  |
| - Rated frequency   | Hz          |                          |                  |  |
| - Rated continuous current                                | A           |                          |                  |  |
| - Short time withstand current and time                   | A, s        |                          |                  |  |
| - Rated power frequency withstand voltage, 50Hz, 60s wet  | kV rms      |                          |                  |  |
| - Rated lightning impulse withstand voltage, 1.2/50µs dry |             |                          |                  |  |
| - Minimum number of mechanical & full load operations     | kV peak     |                          |                  |  |
| - Interrupter contact life                                |             |                          |                  |  |
| - Switch operating times                                  |             |                          |                  |  |
| Open  |             |                          |                  |  |
| Close   |             |                          |                  |  |

**SCHEDULE VI-1a TECHNICAL GUARANTEES, OUTDOOR SWITCHGEAR**

Sheet 3 of 4

| OUTDOOR SWITCHGEAR |  |   | 33 kV     |           |               |
|--------------------|--|---|-----------|-----------|---------------|
| Item               | Particulars  | Unit  | Guar. Fig | Guar. Fig | Reference Doc |
| a.4                | <p><b>Current Transformers</b></p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated voltage</li> <li>- Maximum service voltage</li> <li>- Rated frequency</li> <li>- One-minute power frequency test voltage of                             <ul style="list-style-type: none"> <li>- primary winding</li> <li>- secondary winding</li> </ul> </li> <li>- Lightning impulse withstand voltage</li> <li>- Rated primary currents</li> <li>- Rated secondary current</li> <li>- Short-time thermal rating                             <ul style="list-style-type: none"> <li>- 1 second</li> </ul> </li> <li>- Short-time dynamic rating</li> <li>- Burden and accuracy class of                             <ul style="list-style-type: none"> <li>- measuring core</li> <li>- protection core</li> </ul> </li> <li>- Instrument security factor of the measuring core</li> <li>- Accuracy limit factor of the                             <ul style="list-style-type: none"> <li>- protection core</li> </ul> </li> </ul> | <p>kV</p> <p>kV</p> <p>Hz</p> <p>kV rms</p> <p>kV rms</p> <p>kV peak</p> <p>A</p> <p>A</p> <p>kA rms</p> <p>kA peak</p> |           |           |               |
| a.5                | <p><b>Voltage Transformers, Type _____</b></p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated voltage</li> <li>- Maximum service voltage</li> <li>- One-minute power frequency test voltage                             <ul style="list-style-type: none"> <li>- primary winding</li> <li>- secondary winding</li> </ul> </li> <li>- Lightning impulse withstand voltage</li> <li>- Burden and accuracy class of                             <ul style="list-style-type: none"> <li>a. measuring winding</li> <li>    protection winding</li> </ul> </li> <li>- Ratio</li> </ul>   | <p>kV</p> <p>kV rms</p> <p>kV rms</p> <p>kV rms</p> <p>kV peak</p> <p>kV</p>  |           |           |               |
| a.6                | <p><b>Country of Manufacture</b></p> <ul style="list-style-type: none"> <li>- Cubicles</li> <li>- Circuit breakers</li> <li>- Current transformers</li> <li>- Voltage transformers</li> </ul>  |   |           |           |               |



SCHEDULE VI-1b INFORMATIVE DATA OUTDOOR SWITCHGEAR

Sheet 1 of 3

| Item | Particulars  | Unit | 33 kV |  |
|------|--|------|-------|--|
| b.2  | <b>Circuit Breakers</b>  |      |       |  |
|      | - Reference standard   |      |       |  |
|      | - Type of breaker and designation                                  |      |       |  |
|      | - Voltage drop across main contacts at rated current               | mV   |       |  |
|      | - Type of main contact   | mm   |       |  |
|      | - Type of arch control device                                      | m/s  |       |  |
|      | - Method of closing  |      |       |  |
|      | - Method of tripping   |      |       |  |
|      | - Max. percentage of recovery voltage across any break             | %    |       |  |
|      | - Minimum clearance between live parts and earth, in SF6 or vacuum | mm   |       |  |
|      | - Min distances between phases                                     |      |       |  |

**SCHEDULE VI-1b INFORMATIVE DATA, OUTDOOR SWITCHGEAR**

**Sheet 2 of 3**

| Item | Particulars  | Unit   | 33 kV | Reference Doc |
|------|--|--------|-------|---------------|
|      | - Number of opening operations permissible before inspection and maintenance of contacts, gas treatment etc. |        |       |               |
|      | - at rated current   |        |       |               |
|      | - at maximum short circuit current   |        |       |               |
|      | For SF <sub>6</sub> breakers   |        |       |               |
|      | - Normal gas density for SF <sub>6</sub> circuit breaker (represented by gas pressure)                       |        |       |               |
|      | - at 20°C  | Bar    |       |               |
|      | - at 40°C  | Bar    |       |               |
|      | - Minimum gas density for safe operation   |        |       |               |
|      | - at 20°C  | Bar    |       |               |
|      | - at 40°C  | Bar    |       |               |
|      | - Quantity of gas required per 3-pole breaker  | kg     |       |               |
|      | - Operating pressure of relief device  | Bar    |       |               |
|      | - Method of monitoring pressure and temperature compensation   |        |       |               |
|      | - Max. permissible dew point temp.   | °C     |       |               |
|      | - Max. permissible acidity level   |        |       |               |
|      | - Max. permissible leak rate   | %/year |       |               |
|      | For vacuum breakers  |        |       |               |
|      | - Vacuum in break chamber  | torr   |       |               |
|      | - Max. permissible leak rate   | %      |       |               |
|      | For all breakers   |        |       |               |
|      | - Control voltage  | V DC   |       |               |
|      | - Type of operating device   |        |       |               |
|      | - Motor voltage  |        |       |               |
|      | - AC of DC   |        |       |               |
|      | - Max. permissible service voltage   | V      |       |               |
|      | - Min. service voltage   | V      |       |               |
|      | - Starting current of motor  |        |       |               |
|      | - Power consumption of motor   |        |       |               |
|      | - When starting  | W      |       |               |
|      | - When running   | W      |       |               |
|      | - Power consumption of   |        |       |               |
|      | - Closing coil   | W      |       |               |
|      | - Trip coil  | W      |       |               |
|      | - Heater   | W      |       |               |

**SCHEDULE VI-1b INFORMATIVE DATA, OUTDOOR SWITCHGEAR**

**Sheet 3 of 3**

| Item | Particulars   | Unit                | 33 kV | Reference Doc |
|------|---|---------------------|-------|---------------|
|      | <ul style="list-style-type: none"> <li>- Auxiliary switch</li> <li>- Rupturing current at 110 V DC</li> <li>- Number of free NO contacts</li> <li>- Number of free NC contacts</li> <li>- Test voltage 50Hz, 1 min.</li> </ul> <p>Manufacturer's of:</p> <ul style="list-style-type: none"> <li>- Support insulators</li> <li>- Breaker insulators</li> <li>- Operating mechanism</li> </ul> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>- In addition to the characteristics listed above, the following information shall be given for all switchgear:                             <ul style="list-style-type: none"> <li>- Layout and overall dimensions drawings</li> <li>- descriptions</li> </ul> </li> </ul> | <p>A</p> <p>V</p>   |       |               |
| b.3  | <p><b>Earthing Switches</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of isolating switch</li> <li>- Min. creepage distance (live parts to earth)</li> <li>- Min. isolating distance (clearance between open contacts)</li> <li>- Material of contact surface</li> <li>- Total contact pressure</li> <li>- Type of operating device</li> <li>- weight of earthing switch</li> </ul>   | <p>mm</p> <p>mm</p> |       |               |
| b.4  | <p><b>Current Transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |       |               |
| b.5  | <p><b>Voltage transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |       |               |

**SCHEDULE VI-2a TECHNICAL GUARANTEES, INDOOR MV INDOOR SWITCHGEAR**

**Sheet 1 of 6**

| MV INDOOR SWITCHGEAR |  |  | 11 kV      |               |
|----------------------|--|--|------------|---------------|
| Item                 | Particulars  | Unit   | Guar. Fig. | Reference Doc |
| a.1                  | <p><b>Cubicles</b></p> <p>Manufacturer</p> <p>Metal Clad type</p> <ul style="list-style-type: none"> <li>- Rated Voltage</li> <li>- Maximum service voltage</li> <li>- Rated frequency</li> <li>- Rated continuous busbar current</li> <li>- One minute power frequency withstand voltage, dry and wet                             <ul style="list-style-type: none"> <li>- to earth</li> </ul> </li> <li>- Impulse withstand voltage 1.2/50 ms                             <ul style="list-style-type: none"> <li>- to earth</li> </ul> </li> <li>- Permissible 1 second short-time current</li> <li>- Dynamic short-time current</li> </ul> <p>Arch tested in accordance with IEC 60280 amendment 2</p>  | <p>kV</p> <p>kV</p> <p>Hz</p> <p>A</p> <p>kV rms</p> <p>kV peak</p> <p>kA rms</p> <p>kA peak</p> <p>Yes/no</p>   |            |               |
| a.2                  | <p><b>Circuit Breakers (Type _____)</b></p> <p>Breaking Medium</p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated voltage</li> <li>- Maximum service voltage</li> <li>- Rated frequency</li> <li>- Rated continuous current</li> <li>- One minute power frequency withstand voltage, dry and wet                             <ul style="list-style-type: none"> <li>- to earth</li> <li>- across open breaker pole</li> </ul> </li> <li>- Impulse withstand voltage 1.2/50 ms                             <ul style="list-style-type: none"> <li>- to earth</li> <li>- across open breaker</li> </ul> </li> <li>- Breaking capacity at rated voltage                             <ul style="list-style-type: none"> <li>- symmetrical</li> <li>- asymmetrical</li> </ul> </li> <li>- Making capacity</li> <li>- Breaking capacity of capacitive current</li> </ul> | <p>SF<sub>6</sub>/Vacuum</p> <p>kV</p> <p>kV</p> <p>Hz</p> <p>A</p> <p>kV rms</p> <p>kV rms</p> <p>kV peak</p> <p>kA rms</p> <p>kA rms</p> <p>kA peak</p> <p>A</p> |            |               |



**SCHEDULE VI-2a TECHNICAL GUARANTEES, MV INDOOR SWITCHGEAR Sheet 2 of 6**

| MV INDOOR SWITCHGEAR |   |   | 11 kV     |               |
|----------------------|---|---|-----------|---------------|
| Item                 | Particulars   | Unit  | Guar. Fig | Reference Doc |
|                      | <p><b>Circuit breakers continued</b></p> <ul style="list-style-type: none"> <li>- Overvoltage factor for disconnection of unloaded transformers (without voltage limitation by lightning arresters)</li> <li>- Rated inductive current switching capacity</li> <li>- Permissible 1 second short-time current</li> <li>- Dynamic short-time current</li> <li>- Opening time, interval of time between the instant of application of tripping impulse to the instant when the main contacts have separated in all poles</li> <li>- Make time, interval of time between the initiation of closing operation and the instant when the current begins to flow in the main circuit</li> <li>- Total break time, interval of time between the instant of application of tripping impulse to the instant of final arc extinction in all poles                             <ul style="list-style-type: none"> <li>- at 100% breaking capacity</li> <li>- under phase opposition</li> </ul> </li> <li>- Rate of rise of recovery voltage (RRRV) at 100% short circuit current                             <ul style="list-style-type: none"> <li>- 3-phase</li> <li>- 1-phase</li> </ul> </li> <li>- RRRV out of phase duty</li> <li>- Minimum temperature rise at rated current of main contact</li> </ul> | <p>A</p> <p>kA rms</p> <p>kA peak</p> <p>m.sec.</p> <p>m.sec.</p> <p>m.sec.</p> <p>m.sec.</p> <p>kV/msec</p> <p>kV/msec</p> <p>°C</p> |           |               |
| a.3                  | <p><b>Earthing Switches</b></p> <ul style="list-style-type: none"> <li>- Rated short-time current 1 sec.</li> <li>- Rated dynamic short-circuit current</li> <li>- Making Capacity</li> </ul>   | kA rms  |           |               |

**SCHEDULE VI-2a TECHNICAL GUARANTEES, MV INDOOR SWITCHGEAR**

Sheet 3 of 6

| MV INDOOR SWITCHGEAR |  |  | 11 kV     |               |
|----------------------|--|--|-----------|---------------|
| Item                 | Particulars  | Unit   | Guar. Fig | Reference Doc |
| a.4                  | <p><b>Current Transformers</b></p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated voltage</li> <li>- Maximum service voltage</li> <li>- Rated frequency</li> <li>- One-minute power frequency test voltage of                             <ul style="list-style-type: none"> <li>- primary winding</li> <li>- secondary winding</li> </ul> </li> <li>- Lightning impulse withstand voltage</li> <li>- Rated primary currents</li> <li>- Rated secondary current</li> <li>- Short-time thermal rating                             <ul style="list-style-type: none"> <li>- 1 second</li> </ul> </li> <li>- Short-time dynamic rating</li> <li>- Burden and accuracy class of                             <ul style="list-style-type: none"> <li>- measuring core</li> <li>- protection core</li> </ul> </li> <li>- Instrument security factor of the measuring core</li> <li>- Accuracy limit factor of the                             <ul style="list-style-type: none"> <li>- protection core</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>kV</li> <li>kV</li> <li>Hz</li> <li>kV rms</li> <li>kV rms</li> <li>kV peak</li> <li>A</li> <li>A</li> <li>kA rms</li> <li>kA peak</li> </ul> |           |               |
| a.5                  | <p><b>Voltage Transformers, Type _____</b></p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated voltage</li> <li>- Maximum service voltage</li> <li>- One-minute power frequency test voltage                             <ul style="list-style-type: none"> <li>- primary winding</li> <li>- secondary winding</li> </ul> </li> <li>- Lightning impulse withstand voltage</li> <li>- Burden and accuracy class of                             <ul style="list-style-type: none"> <li>a. measuring winding</li> <li>    protection winding</li> </ul> </li> <li>- Ratio</li> </ul>   | <ul style="list-style-type: none"> <li>kV</li> <li>kV rms</li> <li>kV rms</li> <li>kV rms</li> <li>kV peak</li> <li>kV</li> </ul>  |           |               |
| a.6                  | <p><b>Country of Manufacture</b></p> <ul style="list-style-type: none"> <li>- Cubicles</li> <li>- Circuit breakers</li> <li>- Current transformers</li> <li>- Voltage transformers</li> </ul>  |  |           |               |

**SCHEDULE VI-2a TECHNICAL GUARANTEES, MV INDOOR SWITCHGEAR**

Sheet 4 of 6

| MV INDOOR SWITCHGEAR |  |  | 33 kV     |            |               |
|----------------------|--|--|-----------|------------|---------------|
| Item                 | Particulars  | Unit   | Guar. Fig | Guar. Fig. | Reference Doc |
| a.1                  | <p><b>Cubicles</b></p> <p>Manufacturer</p> <ul style="list-style-type: none"> <li>- Rated Voltage</li> <li>- Maximum service voltage</li> <li>- Rated frequency</li> <li>- Rated continuous busbar current</li> <li>- One minute power frequency withstand voltage, dry and wet                             <ul style="list-style-type: none"> <li>- to earth</li> </ul> </li> <li>- Impulse withstand voltage 1.2/50 ms                             <ul style="list-style-type: none"> <li>- to earth</li> </ul> </li> <li>- Permissible 1 second short-time current</li> <li>- Dynamic short-time current</li> </ul> <p>Arch tested in accordance with IEC 60280 amendment 2</p> | <p>kV</p> <p>kV</p> <p>Hz</p> <p>A</p> <p>kV rms</p> <p>kV peak</p> <p>kA rms</p> <p>kA peak</p> <p>Yes/no</p> |           |            |               |
| a.6                  | <p><b>Country of Manufacture</b></p> <ul style="list-style-type: none"> <li>- Cubicles</li> </ul>  |  |           |            |               |

**SCHEDULE VI-2b INFORMATIVE DATA MV INDOOR VOLTAGE SWITCHGEAR**

**Sheet 1 of 6**

| MV INDOOR SWITCHGEAR |   |  |  |       |               |
|----------------------|---|--|--|-------|---------------|
| Item                 | Particulars   | Unit   |  | 11 kV | Reference Doc |
| b.1                  | <p><b>Cubicles</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of conductors</li> <li>- Conductor material</li> <li>- Cross-section of busbars</li> <li>- Cross section of branch off</li> <li>- Temperature rise of busbars at rated current</li> <li>- Distances between                             <ul style="list-style-type: none"> <li>- Busbar phases</li> <li>- branch offs</li> <li>- Live parts and earth</li> </ul> </li> <li>- Are busbars insulated? If so state insulation material</li> <li>- Class of protection</li> <li>- Short circuit test certificate designation</li> <li>- Overall dimensions of the complete cubicle                             <ul style="list-style-type: none"> <li>- length</li> <li>- height</li> <li>- width</li> </ul> </li> <li>- Thickness of plates</li> <li>- Movement in isolator function</li> <li>- Isolation distance</li> <li>- shutters when isolated or withdrawn?</li> <li>- Weight of complete cubicle with circuit breaker etc.</li> </ul> | <ul style="list-style-type: none"> <li>mm<sup>2</sup></li> <li>mm<sup>2</sup></li> <li>°C</li> <li>mm</li> <li>mm</li> <li>mm</li> <li></li> <li>IP</li> <li></li> <li>mm</li> <li>mm</li> <li>mm</li> <li>mm</li> <li>Hor./vert.</li> <li>mm</li> <li>Yes/no</li> <li></li> </ul> |  |       |               |
| b.2                  | <p><b>Circuit Breakers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of breaker and designation</li> <li>- Voltage drop across main contacts at rated current</li> <li>- Type of main contact</li> <li>- Type of arch control device</li> <li>- Method of closing</li> <li>- Method of tripping</li> <li>- Max. percentage of recovery voltage across any break</li> <li>- Minimum clearance between live parts and earth, in SF6 or vacuum</li> <li>- Min distances between phases</li> </ul>  | <ul style="list-style-type: none"> <li>mV</li> <li>mm</li> <li>m/s</li> <li></li> <li></li> <li></li> <li>%</li> <li>mm</li> <li></li> </ul>   |  |       |               |

**SCHEDULE VI-2b INFORMATIVE DATA, MV INDOOR SWITCHGEAR**

**Sheet 2 of 6**

| MV INDOOR SWITCHGEAR |  |        |  |       |               |
|----------------------|--|--------|--|-------|---------------|
| Item                 | Particulars  | Unit   |  | 11 kV | Reference Doc |
|                      | - Number of opening operations permissible before inspection and maintenance of contacts, gas treatment etc. |        |  |       |               |
|                      | - at rated current   |        |  |       |               |
|                      | - at maximum short circuit current   |        |  |       |               |
|                      | For SF <sub>6</sub> breakers   |        |  |       |               |
|                      | - Normal gas density for SF <sub>6</sub> circuit breaker (represented by gas pressure)                       |        |  |       |               |
|                      | - at 20°C  | Bar    |  |       |               |
|                      | - at 40°C  | Bar    |  |       |               |
|                      | - Minimum gas density for safe operation   |        |  |       |               |
|                      | - at 20°C  | Bar    |  |       |               |
|                      | - at 40°C  | Bar    |  |       |               |
|                      | - Quantity of gas required per 3-pole breaker  | kg     |  |       |               |
|                      | - Operating pressure of relief device  | Bar    |  |       |               |
|                      | - Method of monitoring pressure and temperature compensation   |        |  |       |               |
|                      | - Max. permissible dew point temp.   | °C     |  |       |               |
|                      | - Max. permissible acidity level   |        |  |       |               |
|                      | - Max. permissible leak rate   | %/year |  |       |               |
|                      | For vacuum breakers  |        |  |       |               |
|                      | - Vacuum in break chamber  | torr   |  |       |               |
|                      | - Max. permissible leak rate   | %      |  |       |               |
|                      | For all breakers   |        |  |       |               |
|                      | - Control voltage  | V DC   |  |       |               |
|                      | - Type of operating device   |        |  |       |               |
|                      | - Motor voltage  |        |  |       |               |
|                      | - AC of DC   |        |  |       |               |
|                      | - Max. permissible service voltage   | V      |  |       |               |
|                      | - Min. service voltage   | V      |  |       |               |
|                      | - Starting current of motor  |        |  |       |               |
|                      | - Power consumption of motor   |        |  |       |               |
|                      | - When starting  | W      |  |       |               |
|                      | - When running   | W      |  |       |               |
|                      | - Power consumption of   |        |  |       |               |
|                      | - Closing coil   | W      |  |       |               |
|                      | - Trip coil  | W      |  |       |               |
|                      | - Heater   | W      |  |       |               |

**SCHEDULE VI-2b INFORMATIVE DATA, MV INDOOR SWITCHGEAR**

**Sheet 3 of 6**

| MV INDOOR SWITCHGEAR |   |                     |  |       |               |
|----------------------|---|---------------------|--|-------|---------------|
| Item                 | Particulars   | Unit                |  | 11 kV | Reference Doc |
|                      | <ul style="list-style-type: none"> <li>- Auxiliary switch</li> <li>- Rupturing current at 110 V DC</li> <li>- Number of free NO contacts</li> <li>- Number of free NC contacts</li> <li>- Test voltage 50Hz, 1 min.</li> </ul> <p>Manufacturer's of:</p> <ul style="list-style-type: none"> <li>- Support insulators</li> <li>- Breaker insulators</li> <li>- Operating mechanism</li> </ul> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>- In addition to the characteristics listed above, the following information shall be given for all switchgear:                             <ul style="list-style-type: none"> <li>- Layout and overall dimensions drawings</li> <li>- descriptions</li> </ul> </li> </ul> | <p>A</p> <p>V</p>   |  |       |               |
| b.3                  | <p><b>Earthing Switches</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of isolating switch</li> <li>- Min. creepage distance (live parts to earth)</li> <li>- Min. isolating distance (clearance between open contacts)</li> <li>- Material of contact surface</li> <li>- Total contact pressure</li> <li>- Type of operating device</li> <li>- weight of earthing switch</li> </ul>   | <p>mm</p> <p>mm</p> |  |       |               |
| b.4                  | <p><b>Current Transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |  |       |               |
| b.5                  | <p><b>Voltage transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |  |       |               |

**SCHEDULE VI-2b INFORMATIVE DATA MV INDOOR VOLTAGE SWITCHGEAR**

**Sheet 4 of 6**

| MV INDOOR SWITCHGEAR |   |   |       |  |               |
|----------------------|---|---|-------|--|---------------|
| Item                 | Particulars   | Unit  | 66 kV |  | Reference Doc |
| b.1                  | <p><b>Cubicles</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of conductors</li> <li>- Conductor material</li> <li>- Cross-section of busbars</li> <li>- Cross section of branch off</li> <li>- Temperature rise of busbars at rated current</li> <li>- Distances between                             <ul style="list-style-type: none"> <li>- Busbar phases</li> <li>- branch offs</li> <li>- Live parts and earth</li> </ul> </li> <li>- Are busbars insulated? If so state insulation material</li> <li>- Class of protection</li> <li>- Short circuit test certificate designation</li> <li>- Overall dimensions of the complete cubicle                             <ul style="list-style-type: none"> <li>- length</li> <li>- height</li> <li>- width</li> </ul> </li> <li>- Thickness of plates</li> <li>- Movement in isolator function</li> <li>- Isolation distance</li> <li>- shutters when isolated or withdrawn?</li> <li>- Weight of complete cubicle with circuit breaker etc.</li> </ul> | <p>mm<sup>2</sup></p> <p>mm<sup>2</sup></p> <p>°C</p> <p>mm</p> <p>mm</p> <p>mm</p> <p>IP</p> <p>mm</p> <p>mm</p> <p>mm</p> <p>mm</p> <p>Hor./vert.</p> <p>mm</p> <p>Yes/no</p> |       |  |               |
| b.2                  | <p><b>Circuit Breakers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of breaker and designation</li> <li>- Voltage drop across main contacts at rated current</li> <li>- Type of main contact</li> <li>- Type of arch control device</li> <li>- Method of closing</li> <li>- Method of tripping</li> <li>- Max. percentage of recovery voltage across any break</li> <li>- Minimum clearance between live parts and earth, in SF6 or vacuum</li> <li>- Min distances between phases</li> </ul>  | <p>mV</p> <p>mm</p> <p>m/s</p> <p>%</p> <p>mm</p>   |       |  |               |

**SCHEDULE VI-2b INFORMATIVE DATA, MV INDOOR SWITCHGEAR**

**Sheet 5 of 6**

| MV INDOOR SWITCHGEAR |  |        |       |  |               |
|----------------------|--|--------|-------|--|---------------|
| Item                 | Particulars  | Unit   | 66 kV |  | Reference Doc |
|                      | - Number of opening operations permissible before inspection and maintenance of contacts, gas treatment etc. |        |       |  |               |
|                      | - at rated current   |        |       |  |               |
|                      | - at maximum short circuit current   |        |       |  |               |
|                      | For SF <sub>6</sub> breakers   |        |       |  |               |
|                      | - Normal gas density for SF <sub>6</sub> circuit breaker (represented by gas pressure)                       |        |       |  |               |
|                      | - at 20°C  | Bar    |       |  |               |
|                      | - at 40°C  | Bar    |       |  |               |
|                      | - Minimum gas density for safe operation   |        |       |  |               |
|                      | - at 20°C  | Bar    |       |  |               |
|                      | - at 40°C  | Bar    |       |  |               |
|                      | - Quantity of gas required per 3-pole breaker  | kg     |       |  |               |
|                      | - Operating pressure of relief device  | Bar    |       |  |               |
|                      | - Method of monitoring pressure and temperature compensation   |        |       |  |               |
|                      | - Max. permissible dew point temp.   | °C     |       |  |               |
|                      | - Max. permissible acidity level   |        |       |  |               |
|                      | - Max. permissible leak rate   | %/year |       |  |               |
|                      | For vacuum breakers  |        |       |  |               |
|                      | - Vacuum in break chamber  | torr   |       |  |               |
|                      | - Max. permissible leak rate   | %      |       |  |               |
|                      | For all breakers   |        |       |  |               |
|                      | - Control voltage  | V DC   |       |  |               |
|                      | - Type of operating device   |        |       |  |               |
|                      | - Motor voltage  |        |       |  |               |
|                      | - AC of DC   |        |       |  |               |
|                      | - Max. permissible service voltage   | V      |       |  |               |
|                      | - Min. service voltage   | V      |       |  |               |
|                      | - Starting current of motor  |        |       |  |               |
|                      | - Power consumption of motor   |        |       |  |               |
|                      | - When starting  | W      |       |  |               |
|                      | - When running   | W      |       |  |               |
|                      | - Power consumption of   |        |       |  |               |
|                      | - Closing coil   | W      |       |  |               |
|                      | - Trip coil  | W      |       |  |               |
|                      | - Heater   | W      |       |  |               |



**SCHEDULE VI-2b INFORMATIVE DATA, MV INDOOR SWITCHGEAR**

**Sheet 6 of 6**

| MV INDOOR SWITCHGEAR |   |                     |       |  |               |
|----------------------|---|---------------------|-------|--|---------------|
| Item                 | Particulars   | Unit                | 66 kV |  | Reference Doc |
|                      | <ul style="list-style-type: none"> <li>- Auxiliary switch</li> <li>- Rupturing current at 110 V DC</li> <li>- Number of free NO contacts</li> <li>- Number of free NC contacts</li> <li>- Test voltage 50Hz, 1 min.</li> </ul> <p>Manufacturer's of:</p> <ul style="list-style-type: none"> <li>- Support insulators</li> <li>- Breaker insulators</li> <li>- Operating mechanism</li> </ul> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>- In addition to the characteristics listed above, the following information shall be given for all switchgear:                             <ul style="list-style-type: none"> <li>- Layout and overall dimensions drawings</li> <li>- descriptions</li> </ul> </li> </ul> | <p>A</p> <p>V</p>   |       |  |               |
| b.3                  | <p><b>Earthing Switches</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type of isolating switch</li> <li>- Min. creepage distance (live parts to earth)</li> <li>- Min. isolating distance (clearance between open contacts)</li> <li>- Material of contact surface</li> <li>- Total contact pressure</li> <li>- Type of operating device</li> <li>- weight of earthing switch</li> </ul>   | <p>mm</p> <p>mm</p> |       |  |               |
| b.4                  | <p><b>Current Transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |       |  |               |
| b.5                  | <p><b>Voltage transformers</b></p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type designation</li> <li>- Overall dimensions</li> <li>- Total weight of one current transformer</li> <li>- Type of insulation</li> <li>- Type of insulation</li> </ul>  | <p>kg</p>           |       |  |               |

**SCHEDULE VI 3a TECHNICAL GUARANTEES, CONTROL SYSTEM**

**Sheet 1 of 1**

| SUBSTATION CONTROL SYSTEM (SCS) |  |  |           |
|---------------------------------|--|--|-----------|
| Item                            | Particulars  | Unit   | Guar. Fig |
| a.1                             | <p><b>Control system response and update time under "moderate load" conditions</b></p> <p>The control system shall be designed to yield the following response and update times under "moderate load" conditions</p> <ul style="list-style-type: none"> <li>- Time taken to completely refresh data held with the SCS:                             <ul style="list-style-type: none"> <li>a. maximum</li> <li>b. average</li> </ul> </li> <li>- Time taken to carry out a complete status check of all indications and alarms                             <ul style="list-style-type: none"> <li>a. maximum</li> <li>b. average</li> </ul> </li> <li>- The time between selection and display of a VDU diagram fully updated from the existing main computer data base shall not exceed</li> <li>- The time between selection of a control function and check back shall not exceed</li> <li>- The time between execution of a control function and successful completion being displayed at the Operation Workshop shall not exceed for                             <ul style="list-style-type: none"> <li>a. Circuit breaker (operating time = 250 ms)</li> <li>b. Isolator (operating time = 10s)</li> </ul> </li> <li>- The time between the occurrence of the first change of state/alarm and display at the Operator Workstation shall not exceed</li> <li>- The time between selecting display of analogue measurements and the corresponding value in the database being displayed shall not exceed</li> <li>- The time between successive updates of the data base with analogue measurements shall not exceed                             <ul style="list-style-type: none"> <li>a. Network MW measurements</li> <li>b. Other analogue measurements</li> </ul> </li> </ul> | <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> <p>s</p> |           |
| a.2                             | <p><b>Equipment Reliability</b></p> <p>Mean time between failure shall be not less that:</p> <ul style="list-style-type: none"> <li>- Each computer</li> <li>- VDU</li> <li>- Logging printer</li> <li>- System console</li> <li>- Communication system</li> </ul>   | <p>h</p> <p>h</p> <p>h</p> <p>h</p> <p>h</p>   |           |



**SCHEDULE VI 4a TECHNICAL GUARANTEES, PROTECTION ETC.**

**Sheet 1 of 3**

| CONTROL, PROTECTION, METERING, SIGNALLING |  |  |           |               |
|---|--|--|-----------|---------------|
| Item                                      | Particulars  | Unit   | Guar. Fig | Reference Doc |
| a.1                                       | <p><b>Indicating Instruments</b></p> <ul style="list-style-type: none"> <li>- To be filled in for each AC and DC Ampere meter and Voltmeter and for each Wattmeter, VAr-meter, Frequency-meter and other indicating instruments:</li> <li>- Instrument for:<br/>(A, V (AC), V (DC), W, etc.)</li> <li>- Error</li> <li>- Max. admissible current</li> <li>- Max. admissible voltage</li> </ul> | %<br>% .I <sub>N</sub><br>% .I <sub>N</sub>  |           |               |
| a.2                                       | <p><b>Meters</b></p> <ul style="list-style-type: none"> <li>- To be filled in for each meter</li> <li>- Meter for (MWh, MVarh):</li> <li>- Error with 5% load</li> <li>- Error with 10% load</li> <li>- Error with 20% load</li> <li>- Error with 100% load</li> <li>- Max. admissible current</li> </ul>  | %<br>%<br>%<br>%<br>% .I <sub>N</sub>  |           |               |
| a.3                                       | <p><b>Metering Converters (Transducers)</b></p> <ul style="list-style-type: none"> <li>- Converter for (MW, MVar, A, etc):</li> <li>- Error</li> <li>- Linearity</li> <li>- Max. admissible current for 0.5 seconds</li> <li>- Max. admissible current continuously</li> <li>- Max. admissible voltage for 0.5 seconds</li> <li>- Max. admissible voltage continuously</li> </ul>              | %<br>%<br>% .I <sub>N</sub><br>% .I <sub>N</sub><br>% .I <sub>N</sub><br>% .I <sub>N</sub> |           |               |

**SCHEDULE VI 4a TECHNICAL GUARANTEES, PROTECTION ETC.**

**Sheet 2 of 3**

| CONTROL, PROTECTION, METERING, SIGNALLING |  |   |           |               |
|---|--|---|-----------|---------------|
| Item                                      | Particulars  | Unit  | Guar. Fig | Reference Doc |
| a.4                                       | <p><b>Protection Relays</b></p> <p>- To be <b>copied</b> and filled in for each type of relay as applicable</p> <p>Relay for _____:</p> <p>- Accuracy of the adjustable tripping time</p> <p>- Min. possible tripping time</p> <p>- Drop out ratio</p> <p>- Directional sensitivity (dist. relay only)</p> <p>- Max. admissible current during 0.5 sec.</p> <p>- Max. admissible current continuously</p> <p>- Relation between tripping coil current and holding coil current (diff. relay only)</p> <p>- Limit value of the adjustable tripping current (O.C.R.)</p> <p>- Limit value of the instantaneous tripping current (O.C.R.)</p> <p>- Limit value of the adjustable tripping voltage (O.V.R.)</p> <p>- Limit value of the instantaneous tripping voltage (O.V.R.)</p> <p><b>Distance Protection</b><br/>Shall incorporate the following features:</p> <ul style="list-style-type: none"> <li>• Ratings: AC Inputs: 110V, 1Amp (three phase).</li> <li>• Power Supply Voltage: 110VDC. (Universal power supply of 30-300VDC is preferred).</li> <li>• The relays shall be of Numeric design.</li> <li>• Impedance criteria.</li> <li>• Three zones phase –phase Protection.</li> <li>• Three zones phase –earth Protection</li> <li>• Additional Zone 4 Protection</li> <li>• Automatic Switch on to fault.</li> <li>• Independent settings for each zone.</li> <li>• Distance to fault measurement.</li> <li>• Display: On operation, the relay should display the faulted phase(s), time and zone of operation and distance to fault.</li> <li>• IDMT Three Phase/Over current &amp; Earth fault Protection.</li> <li>• Fuse failure supervision.</li> <li>• Auto- reclose logic 1 and/or 3 phases.</li> <li>• Three pole tripping logic.</li> <li>• Disturbance and event records including software for disturbance analysis.</li> <li>• Fault record should be incorporated.</li> <li>• At least six (6) Binary inputs.</li> <li>• Mho/Quadrilateral characteristics.</li> </ul> | <p>sec.</p> <p>ms</p> <p>%</p> <p>% .U<sub>N</sub></p> <p>% .I<sub>N</sub></p> <p>% .I<sub>N</sub></p> <p>%</p> <p>% .I<sub>N</sub></p> <p>% .I<sub>N</sub></p> <p>% .I<sub>N</sub></p> <p>% .I<sub>N</sub></p> <p>Shall incorporate all the features as listed</p> |           |               |

|     |   |   |  |  |
|-----|---|---|--|--|
|     | <ul style="list-style-type: none"> <li>• Stability against Switching inrush currents and Reverse faults.</li> <li>• Clear faulted phase indication.</li> <li>• Clear fault identification even for boundary conditions.</li> <li>• Software necessary for all above functions shall be provided.</li> <li>• Three sets of Installation, Commissioning and maintenance manuals shall be provided.</li> </ul> <p><u>Three phase numeric directional over current and earth fault relay</u></p> <p>Shall incorporate the following features:</p> <ul style="list-style-type: none"> <li>• Relay must be of Numerical design.</li> <li>• Current setting range for over current relay 0.5In-2.4In</li> <li>• Current setting range for earth fault relay 0.05In-0.8In</li> <li>• Quadrature connection for polarising voltage (Vn=110)</li> <li>• Applicable on the LV side of a Dyn1 transformer</li> <li>• High set Element, with a setting range of 1-32In</li> <li>• The phase and earth directional elements should be individually selectable.</li> <li>• I.D.M.T characteristics according to BS 142 or IEC 60255 and Definite time characteristic</li> <li>• The normal operating boundary shall be +/-90 degrees from relay characteristic angle Relay sensitivity should be 1% of rated value of current and current polarising voltage at an angle equal to the relay characteristic angle.</li> <li>• Time setting multiplier 0.05 - 1.0</li> <li>• Broken conductor protection feature</li> <li>• Negative sequence Protection Feature</li> <li>• Highset Element for both over current and earth fault Protection, with a setting range of 1-30In.</li> <li>• Thermal Protection.</li> <li>• Dedicated Breaker Fail Protection.</li> <li>• Circuit Breaker Maintenance</li> <li>• Incorporate Fault records, Event Records and disturbance records.</li> <li>• Configurable output relays with ability to output starting elements to control Tripping of other upstream Protection relays.</li> <li>• Must provide all technical and operations manuals and configurations and settings software.</li> </ul> | <p>Shall incorporate all the features as listed</p> |  |  |
| a.4 | <b>Protection Relays</b>  |   |  |  |

|  |   |  |  |
|--|---|--|--|
| <p>- To be <b>copied</b> and filled in for each type of relay as applicable</p> <p>Relay for _____:</p> <ul style="list-style-type: none"> <li>- Accuracy of the adjustable tripping time</li> <li>- Min. possible tripping time</li> <li>- Drop out ratio</li> <li>- Directional sensitivity (dist. relay only)</li> <li>- Max. admissible current during 0.5 sec.</li> <li>- Max. admissible current continuously</li> <li>- Relation between tripping coil current and holding coil current (diff. relay only)</li> <li>- Limit value of the adjustable tripping current (O.C.R.)</li> <li>- Limit value of the instantaneous tripping current (O.C.R.)</li> <li>- Limit value of the adjustable tripping voltage (O.V.R.)</li> <li>- Limit value of the instantaneous tripping voltage (O.V.R.)</li> </ul>   | <p>sec.</p> <p>ms</p> <p>%</p> <p>% <math>U_N</math></p> <p>% <math>I_N</math></p> <p>% <math>I_N</math></p> <p>%</p> <p>% <math>I_N</math></p> <p>% <math>I_N</math></p> <p>% <math>I_N</math></p> <p>% <math>I_N</math></p> |  |  |
| <p><u>Biased differential protection for a two winding transformer.</u></p> <ul style="list-style-type: none"> <li>• Relay Must be of Numerical design</li> <li>• Pick up setting range, 0.1 to 0.5In</li> <li>• Should incorporate a high-set Element with a setting range of up to 20In.</li> <li>• Magnetising current inrush restraint</li> <li>• Integral CT ratio compensation (0.1-2) and vector group compensation</li> <li>• Measurement and indication on the MMI, of phase, differential and bias currents</li> <li>• Storage of Fault records and Event records; the Fault flags should be accessible on the relay LCD screen without opening the relay cover.</li> <li>• Overfluxing restraint</li> <li>• Overfluxing protection with Alarm and Trip functions</li> <li>• 5th harmonic restraint feature on the differential Element.</li> <li>• Appropriate Dual Bias characteristic to ensure relay stability for heavy through faults</li> <li>• Should incorporate a disturbance recorder feature.</li> <li>• Red L.E.D to indicate Tripping</li> <li>• Relay Self diagnostic and Alarm feature</li> <li>• Ability to Latch output contacts to prevent TX re-energizing before carrying out investigations.</li> </ul> <p><u>Three phase numeric IDMTL over current and earth fault relay</u></p> | <p>Shall incorporate all the features as listed</p>   |  |  |





**SCHEDULE VI 4a TECHNICAL GUARANTEES, PROTECTION ETC.**

**Sheet 3 of 3**

| CONTROL, PROTECTION, METERING, SIGNALLING |   |  |           |               |
|---|---|--|-----------|---------------|
| Item                                      | Particulars   | Unit   | Guar. Fig | Reference Doc |
| a.5                                       | <p><b>Auxiliary Circuit Breakers</b></p> <ul style="list-style-type: none"> <li>- To be filled in for each type of AC and DC breaker:</li> <li>- Min. operating voltage</li> <li>- Max. operating voltage</li> <li>- Drop out voltage</li> <li>- Service life (min. number of contact operation)</li> </ul> | <p>%.<math>U_N</math></p> <p>%.<math>U_N</math></p> <p>V</p> |           |               |
| a.6                                       | <p><b>Manufacturer's Name</b></p> <ul style="list-style-type: none"> <li>- Control room boards</li> <li>- Local relay boards</li> <li>- Protection relays</li> <li>- Auxiliary contactors</li> </ul>  |  |           |               |
| a.7                                       | <p><b>Country of Manufacture</b></p> <ul style="list-style-type: none"> <li>- Control room boards</li> <li>- Local relay boards</li> <li>- Protection relays</li> <li>- Auxiliary contactors</li> </ul>   |  |           |               |

**SCHEDULE VI 4b INFORMATIVE DATA, PROTECTION ETC.**

**Sheet 1 of 2**

| CONTROL, PROTECTION, METERING, SIGNALLING |   |                      |      |               |
|---|---|----------------------|------|---------------|
| Item                                      | Particulars   | Unit                 | Data | Reference Doc |
| b.1                                       | <p><b>Indicating Instruments</b></p> <p>To be filled in for each type of instrument:</p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type (moving coil, iron type, etc.)</li> <li>- Consumption of internal resistance</li> <li>- Size</li> </ul>                        | VA/ohm<br>mm         |      |               |
| b.2                                       | <p><b>Meters</b></p> <p>To be filled in for each type of meter:</p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type</li> <li>- Consumption of internal resistance</li> <li>- Size</li> </ul>  | VA/ohm<br>mm         |      |               |
| b.3                                       | <p><b>Metering Converters (Transducers)</b></p> <p>To be filled in for each type for converter:</p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type</li> <li>- Consumption, current</li> <li>- Consumption, voltage</li> <li>- Time constant</li> <li>- Size</li> </ul> | VA<br>VA<br>ms<br>mm |      |               |
| b.4                                       | <p><b>Alarm Annunciators</b></p> <p>To be filled in for each annunciator panel:</p> <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Type</li> <li>- Number of annunciators</li> <li>- Size of each annunciator (area of the cap)</li> <li>- Total size of panel</li> </ul>   | mm<br>mm             |      |               |
| b.5                                       | <p><b>Control Room Board</b></p> <ul style="list-style-type: none"> <li>- Height</li> <li>- Width</li> <li>- Length</li> <li>- Relay boards                             <ul style="list-style-type: none"> <li>- Height</li> <li>- Width</li> <li>- Length</li> </ul> </li> </ul>                   | mm<br>mm<br>mm       |      |               |



**SCHEDULE VI 5b INFORMATIVE DATA, CABLES**

**Sheet 1 of 2**

| POWER CABLES, CONTROL CABLES, CABLE RACKS |  |                                  |      |               |
|---|--|----------------------------------|------|---------------|
| Item                                      | Particulars  | Unit                             | Data | Reference Doc |
| b.1                                       | <p><b>Low Voltage Cables</b></p> <ul style="list-style-type: none"> <li>- Conductor material</li> <li>- Insulation material</li> <li>- Armouring/screen</li> <li>- Protective coating</li> <li>- Overall diameter of cable of biggest cable</li> <li>- Weight of heaviest reel, including cable</li> <li>- Size of biggest reel, diameter/width</li> </ul>           | <p>mm</p> <p>kg</p> <p>mm/mm</p> |      |               |
| b.2                                       | <p><b>Control and Measuring Cables</b></p> <ul style="list-style-type: none"> <li>- Conductor material</li> <li>- Insulation material</li> <li>- Armouring/screen</li> <li>- Protective coating</li> <li>- Overall diameter of cable of biggest cable</li> <li>- Weight of heaviest reel, including cable</li> <li>- Size of biggest reel, diameter/width</li> </ul> | <p>mm</p> <p>kg</p> <p>mm/mm</p> |      |               |
| b.3                                       | <p><b>Special Cables</b></p> <p>To be used for:</p> <ul style="list-style-type: none"> <li>- Relevant informative data</li> </ul>  |                                  |      |               |

**SCHEDULE VI 5b INFORMATIVE DATA, CABLES**

**Sheet 2 of 2**

| POWER CABLES, CONTROL CABLES, CABLE RACKS |  |                                       |      |               |
|---|--|---------------------------------------|------|---------------|
| Item                                      | Particulars  | Unit                                  | Data | Reference Doc |
|   | <b>11 kV Voltage Cables</b><br>- Conductor material<br>- Insulation material<br>- Armouring/screen<br>- Protective coating<br>- Overall diameter of cable of biggest cable<br>- Weight of heaviest reel, including cable<br>- Size of biggest reel, diameter/width | <br><br><br><br><br>mm<br>kg<br>mm/mm |      |               |
|   | <b>33 kV Voltage Cables</b><br>- Conductor material<br>- Insulation material<br>- Armouring/screen<br>- Protective coating<br>- Overall diameter of cable of biggest cable<br>- Weight of heaviest reel, including cable<br>- Size of biggest reel, diameter/width | <br><br><br><br><br>mm<br>kg<br>mm/mm |      |               |
|   | <b>66 kV Voltage Cables</b><br>- Conductor material<br>- Insulation material<br>- Armouring/screen<br>- Protective coating<br>- Overall diameter of cable of biggest cable<br>- Weight of heaviest reel, including cable<br>- Size of biggest reel, diameter/width | <br><br><br><br><br>mm<br>kg<br>mm/mm |      |               |
|   | <b>Special Cables, Optical fibre</b><br>- Relevant informative data  |                                       |      |               |

**SCHEDULE VI 6a TECHNICAL GUARANTEES, EARTHING**

**Sheet 1 of 1**

| EARTHING SYSTEM |   |      |           |               |
|-----------------|---|------|-----------|---------------|
| Item            | Particulars   | Unit | Guar. Fig | Reference Doc |
| a.1             | <b>Resistance to Earth of Earthing Electrode System</b> (for each substation) |      |           |               |
|                 | - Under the control building max.   | ohms |           |               |
|                 | - Under the switchyard max.   | ohms |           |               |
|                 | - Complete earthing system  | ohms |           |               |

**SCHEDULE VI 6b INFORMATIVE DATA, EARTHING**

**Sheet 1 of 1**

| EARTHING SYSTEM |   |      |      |               |
|-----------------|---|------|------|---------------|
| Item            | Particulars   | Unit | Data | Reference Doc |
| b.1             | <ul style="list-style-type: none"> <li>- Reference standard</li> <li>- Material of earth conductor</li> <li>- Max. temp of any earth conductor during 1 sec. rated phase - ground fault</li> <li>- Method of interconnecting earth grid conductors</li> </ul> |      |      |               |

## TECHNICAL SCHEDULES TRANSFORMERS

### SCHEDULE VI 7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS

Sheet 1 of 7

| HV POWER TRANSFORMERS |   |      | Guaranteed Data |        |  |
|-----------------------|---|------|-----------------|--------|--|
| Item                  | Description   | Unit | 7.5MVA          | 2.5MVA |  |
| 1.                    | Continuous maximum rating on any tapping when operation under the ambient conditions specified in Section VI, Clause 4.1.3.2.1 Design criteria: |      |                 |        |  |
|                       | With ONAN cooling;  |      |                 |        |  |
|                       | HV winding  | MVA  |                 |        |  |
|                       | LV winding  | MVA  |                 |        |  |
|                       | TV winding  | MVA  | -               |        |  |
|                       | With ONAF cooling;  |      |                 |        |  |
|                       | HV winding  | MVA  |                 |        |  |
|                       | LV winding  | MVA  |                 |        |  |
|                       | TV winding  | MVA  | -               |        |  |
| 2.                    | Rated frequency   | Hz   |                 |        |  |
| 3.                    | Rated no-load voltage at rated frequency on:  |      |                 |        |  |
|                       | HV, principal tapping   | kV   |                 |        |  |
|                       | HV, extreme plus tapping  | kV   |                 |        |  |
|                       | HV, extreme minus tapping   | kV   |                 |        |  |
|                       | LV,   | kV   |                 |        |  |
|                       | TV,   | kV   | -               |        |  |
| 4.                    | Tapping ranges from principal tapping:  |      |                 |        |  |
|                       | HV, no of plus tapplings  | -    |                 |        |  |
|                       | HV, no of minus tapplings   | -    |                 |        |  |
|                       | HV, steps in % of rated voltage   | %    |                 |        |  |
| 5.                    | No-load losses at rated voltage and frequency   | kW   |                 |        |  |
| 6.                    | No-load current at rated voltage and frequency  | A    |                 |        |  |



**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS**

Sheet 2 of 7

| HV POWER TRANSFORMERS |   |      | Guaranteed Data |        |  |
|-----------------------|---|------|-----------------|--------|--|
| Item                  | Description   | Unit | 7.5MVA          | 2.5MVA |  |
| 7.                    | Load losses at 75°C at rated currents, the third winding being open:                        |      |                 |        |  |
|                       | HV - LV, ONAN   | kW   | -               |        |  |
|                       | HV - TV, ONAN   | kW   | -               |        |  |
|                       | LV - TV, ONAN   | kW   | -               |        |  |
|                       | HV - LV, ONAF   | kW   | -               |        |  |
|                       | HV - TV, ONAF   | kW   | -               |        |  |
|                       | LV - TV, ONAF   | kW   | -               |        |  |
| 8.                    | Cooling plant power consumption   | kW   |                 |        |  |
| 9.                    | Total losses at 75°C on principal tapping and unity power factor and rated currents:        |      |                 |        |  |
|                       | ONAN  | kW   |                 |        |  |
|                       | ONAF including input to cooling plant   | kW   |                 |        |  |
| 10.                   | Impedance voltages at 75° referred to mutual capacities at rated frequency and 100% rating: |      |                 |        |  |
|                       | Principal tapping:  |      |                 |        |  |
|                       | HV - LV, ONAN   | %    |                 |        |  |
|                       | HV - TV, ONAN   | %    | -               |        |  |
|                       | LV - TV, ONAN   | %    | -               |        |  |
|                       | HV - LV, ONAF   | %    | -               |        |  |
|                       | HV - TV, ONAF   | %    | -               |        |  |
|                       | LV - TV, ONAF   | %    | -               |        |  |

**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS** Sheet 3 of 7

| HV POWER TRANSFORMERS |  |      | Guaranteed Data |        |  |
|-----------------------|--|------|-----------------|--------|--|
| Item                  | Description  | Unit | 7.5MVA          | 2.5MVA |  |
|                       | Extreme plus tapping:  |      |                 |        |  |
|                       | HV - LV, ONAN  | %    |                 |        |  |
|                       | HV - TV, ONAN  | %    | -               |        |  |
|                       | LV - TV, ONAN  | %    | -               |        |  |
|                       | HV - LV, ONAF  | %    |                 |        |  |
|                       | HV - TV, ONAF  | %    | -               |        |  |
|                       | LV - TV, ONAF  | %    | -               |        |  |
|                       | Extreme minus tapping:   |      |                 |        |  |
|                       | HV - LV, ONAN  | %    |                 |        |  |
|                       | HV - TV, ONAN  | %    | -               |        |  |
|                       | LV - TV, ONAN  | %    | -               |        |  |
|                       | HV - LV, ONAF  | %    |                 |        |  |
|                       | HV - TV, ONAF  | %    | -               |        |  |
|                       | LV - TV, ONAF  | %    | -               |        |  |
| 11.                   | Temperature rise after continuous operation with rated MVA, under the ambient conditions specified in Section VI, Clause 4.1.3.2.1 and the rated conditions giving the highest losses: |      |                 |        |  |
|                       | Top oil (by thermometer)   | °C   |                 |        |  |
|                       | Windings (by resistance)   | °C   |                 |        |  |
| 12.                   | Efficiency on principal tapping max. temperature of winding and unity power factor and TV winding open:  |      |                 |        |  |
|                       | - 120% load, ONAN  | %    |                 |        |  |
|                       | - 100% load, ONAN  | %    |                 |        |  |
|                       | - 50% load, ONAN   | %    |                 |        |  |
|                       | - 120% load, ONAF  | %    |                 |        |  |
|                       | - 100% load, ONAF  | %    |                 |        |  |
|                       | - 50% load, ONAF   | %    |                 |        |  |

**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS** Sheet 4 of 7

| HV POWER TRANSFORMERS |  |      | Guaranteed Data |        |  |
|-----------------------|--|------|-----------------|--------|--|
| Item                  | Description  | Unit | 7.5MVA          | 2.5MVA |  |
| 13.                   | Inherent voltage regulation on principal tapping, 75°C and unity power factor:       |      |                 |        |  |
|                       | - TV winding open  | %    |                 |        |  |
|                       | - 80% of full load on LV winding and 20% on TV winding                               | %    |                 |        |  |
| 14.                   | Inherent voltage regulation on principal tapping, 75°C and 0.8 power factor lagging: |      |                 |        |  |
|                       | - TV winding open  | %    |                 |        |  |
|                       | - 80% of full load on LV winding and 20% on TV winding                               | %    |                 |        |  |
| 15.                   | Vector group   | -    |                 |        |  |
| 16.                   | No. of phases per transformer  | -    |                 |        |  |
| 17.                   | Type of cooling  | -    |                 |        |  |
| 18.                   | Whether star connected windings shall be fully insulated or graded                   |      |                 |        |  |
|                       | - HV winding   | -    |                 |        |  |
|                       | - LV winding   | -    |                 |        |  |
| 19.                   | Insulation levels of star points   |      |                 |        |  |
|                       | - HV winding   | kV   |                 |        |  |
|                       | - LV winding   | kV   |                 |        |  |
| 20.                   | Method of system earthing:   |      |                 |        |  |
|                       | - HV system  | -    |                 |        |  |
|                       | - LV system  |      |                 |        |  |

**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS** Sheet 5 of 7

| HV POWER TRANSFORMERS |  |                | Guaranteed Data |        |  |
|-----------------------|--|----------------|-----------------|--------|--|
| Item                  | Description  | Unit           | 7.5MVA          | 2.5MVA |  |
| 21.                   | Method of transformer earthing:<br>- HV windings - star point<br>- LV windings - star point<br>- TV winding - one corner of closed delta | -<br>-<br>-    |                 |        |  |
| 22.                   | Whether TV windings are to be brought out to separate bushing insulators   | -              |                 |        |  |
| 23.                   | Indoor or outdoor installation   | -              |                 |        |  |
| 24.                   | System highest voltage according to IEC:<br>- HV<br>- LV<br>- TV   | kV<br>kV<br>kV | -               |        |  |
| 25.                   | Maximum flux density at rated voltage on principal tapping and rated frequency:<br>- Transformer legs<br>- Transformer yokes             | T<br>T         |                 |        |  |
| 26.                   | Maximum flux density at most onerous voltage and frequency conditions:<br>- Transformer legs<br>- Transformer yokes                      | T<br>T         |                 |        |  |
| 27.                   | Specific core loss   | W/kg           |                 |        |  |

**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS** Sheet 6 of 7

| HV POWER TRANSFORMERS |   |  | Guaranteed Data |        |  |
|-----------------------|---|--|-----------------|--------|--|
| Item                  | Description   | Unit   | 7.5MVA          | 2.5MVA |  |
| 28.                   | Maximum current density in windings at rated output:<br><br>HV, higher voltage, ONAN<br>HV, lower voltage, ONAF<br>LV, ONAN<br>LV, ONAF<br>TV, ONAN<br>TV, ONAF | <br><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup> |                 |        |  |
| 29.                   | Magnetising current at rated nominal voltage on principal tapping   | A  |                 |        |  |
| 30.                   | Maximum hot spot temperature of winding   | °C   |                 |        |  |
| 31.                   | Equivalent resistance referred to HV side   | ohms   |                 |        |  |
| 32.                   | Equivalent reactance referred to HV side  | ohms   |                 |        |  |
| 33.                   | Maximum current carrying capacity of bushings:<br><br>HV<br>LV<br>TV  | <br><br>A<br>A<br>A  |                 |        |  |
| 34.                   | Rated service voltage of bushings:<br><br>HV<br>LV<br>TV<br>HV, neutral<br>LV, neutral  | <br><br>kV<br>kV<br>kV<br>kV<br>kV   |                 |        |  |

**SCHEDULE VI-7a - TECHNICAL GUARANTEES, POWER TRANSFORMERS** Sheet 7 of 7

| HV POWER TRANSFORMERS |   |      | Guaranteed Data |        |  |
|-----------------------|---|------|-----------------|--------|--|
| Item                  | Description   | Unit | 7.5MVA          | 2.5MVA |  |
| 35.                   | 1 minute, 50 Hz dry withstand voltage:  |      |                 |        |  |
|                       | HV bushing  | kV   |                 |        |  |
|                       | LV bushing  | kV   |                 |        |  |
|                       | TV bushing  | kV   |                 |        |  |
| 36.                   | 1 minute, 50 Hz wet withstand voltage:  |      |                 |        |  |
|                       | HV bushing  | kV   |                 |        |  |
|                       | LV bushing  | kV   |                 |        |  |
|                       | TV bushing  | kV   |                 |        |  |
| 37.                   | Impulse withstand voltage:  |      |                 |        |  |
|                       | HV bushing  | kV   |                 |        |  |
|                       | LV bushing  | kV   |                 |        |  |
|                       |   |      |                 |        |  |
| 38.                   | Maximum noise level   |      |                 |        |  |
|                       | - Transformer and tap changing equipment energised and at no-load with ONAN cooling | dB   |                 |        |  |
|                       | - Same as above but with ONAF cooling (fans running)                                | dB   |                 |        |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMERS**

Sheet 1 of 9

| HV POWER TRANSFORMERS |   |                   |        |        |  |
|-----------------------|---|-------------------|--------|--------|--|
| Item                  | Description   | Unit              | 7.5MVA | 2.5MVA |  |
| 1.                    | Type of transformer (core or shell type)                          | -                 |        |        |  |
| 2.                    | Number of core legs   | -                 |        |        |  |
| 3.                    | Type of windings:   |                   |        |        |  |
|                       | HV  | -                 |        |        |  |
|                       | LV  | -                 |        |        |  |
|                       | TV  | -                 |        |        |  |
| 4.                    | Type of insulation:   |                   |        |        |  |
|                       | HV, winding   | -                 |        |        |  |
|                       | LV, winding   | -                 |        |        |  |
|                       | TV, winding   | -                 |        |        |  |
|                       | Tappings  |                   |        |        |  |
|                       | Tapping connection  | -                 |        |        |  |
|                       | Core bolts (if any)   | -                 |        |        |  |
|                       | Core bolt washers (if any)  | -                 |        |        |  |
|                       | Core lamination designation                                       | -                 |        |        |  |
|                       | Specific core loss  | w/cm <sup>3</sup> |        |        |  |
| 5.                    | Type of axial coil supports:                                      |                   |        |        |  |
|                       | HV winding  | -                 |        |        |  |
|                       | LV winding  | -                 |        |        |  |
|                       | TV winding  | -                 |        |        |  |
| 6.                    | Winding conductor material  | -                 |        |        |  |
|                       | HV  | -                 |        |        |  |
|                       | LV  | -                 |        |        |  |
| 7.                    | Type of joints in the magnetic core (butt type, interleaved etc.) |                   |        |        |  |
| 8.                    | Calculated thermal time constant:                                 |                   |        |        |  |
|                       | ONAN  | hours             |        |        |  |
|                       | ONAF  | hours             |        |        |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 2 of 9

| HV POWER TRANSFORMERS |   |      |        |        |  |
|-----------------------|---|------|--------|--------|--|
| Item                  | Description   | Unit | 7.5MVA | 2.5MVA |  |
| 9.                    | Type of bushings:   |      |        |        |  |
|                       | HV  | -    |        |        |  |
|                       | LV  | -    |        |        |  |
|                       | TV  | -    |        |        |  |
|                       | HV, LV neutral  | -    |        |        |  |
| 10.                   | Principal bushing insulator materials:                            |      |        |        |  |
|                       | HV  | -    |        |        |  |
|                       | LV  | -    |        |        |  |
|                       | TV  | -    |        |        |  |
|                       | HV, LV neutral  | -    |        |        |  |
| 11.                   | Total creepage distance over porcelain externally:                |      |        |        |  |
|                       | HV bushing  | mm   |        |        |  |
|                       | LV bushing  | mm   |        |        |  |
| 12.                   | Protected leakage distance over porcelain externally (90° shadow) |      |        |        |  |
|                       | HV bushing  | mm   |        |        |  |
|                       | LV bushing  | mm   |        |        |  |
| 13.                   | Thickness of transformer tank:                                    |      |        |        |  |
|                       | Sides   | mm   |        |        |  |
|                       | Bottom  | mm   |        |        |  |
|                       | Top   | mm   |        |        |  |
| 14.                   | Thickness of radiator plates                                      | mm   |        |        |  |
| 15.                   | Number of radiators per transformer                               | -    |        |        |  |



**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 3 of 9

| <b>HV POWER TRANSFORMERS</b> |  |   |               |               |  |
|------------------------------|--|---|---------------|---------------|--|
| <b>Item</b>                  | <b>Description</b>   | <b>Unit</b>   | <b>7.5MVA</b> | <b>2.5MVA</b> |  |
| 16.                          | On-load tap changer:<br><br>Type (resistor type, reactor type, etc.)<br>Total number of tapplings including principal<br>Rated currents of:<br><br>- Selector switch<br>- Diverter switch<br>- Resistors<br><br>Maximum overcurrent of:<br><br>- Selector switch<br>- Diverter switch<br>- Resistors<br>Driving motor input<br>Type of driving motor (3-phase etc.)<br><br>Monitoring contact:<br><br>- Closing time in advance of parting of<br>diverter switch<br>- Opening time after diverter switch<br>contacts have fully opened<br>Diverter switch opening time<br>Time from "point of no return" to parting of<br>diverter switch contacts | -<br>-<br><br>A<br>A<br>A<br><br><br><br>A<br>A<br>A<br>kW<br>-<br><br><br><br>sec.<br>sec.<br>sec.<br>sec. |               |               |  |
| 17.                          | Whether outdoor cabinets/kiosks are provided with heaters  | -   |               |               |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 4 of 9

| HV POWER TRANSFORMERS |   |         |        |        |  |
|-----------------------|---|---------|--------|--------|--|
| Item                  | Description   | Unit    | 7.5MVA | 2.5MVA |  |
| 18.                   | Forced air cooling system:  |         |        |        |  |
|                       | State if fans are blowing directly on radiators                       | -       |        |        |  |
|                       | Total number of fan units per transformer                             | -       |        |        |  |
|                       | Cooling capacity of each complete cooling system                      | kW      |        |        |  |
| 19.                   | Total oil quantity in completely filled transformer                   | kp      |        |        |  |
| 20.                   | Total weight of oil in completely filled transformer                  | l       |        |        |  |
| 21.                   | Total oil quantity in conservator                                     | l       |        |        |  |
| 22.                   | Total quantity of oil in conservator between highest and lowest level | l       |        |        |  |
| 23.                   | Volume of conservator tank  | l       |        |        |  |
| 24.                   | Weight of copper in windings  | kg      |        |        |  |
| 25.                   | Weight of core/winding assembly                                       | kg      |        |        |  |
| 26.                   | Weight of each radiator:  |         |        |        |  |
|                       | Filled with oil   | kg      |        |        |  |
|                       | Empty   | kg      |        |        |  |
| 27.                   | Total weight of bushings:   |         |        |        |  |
|                       | HV  | kg/each |        |        |  |
|                       | LV  | kg/each |        |        |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 5 of 9

| HV POWER TRANSFORMERS |  |                      |        |        |  |
|-----------------------|--|----------------------|--------|--------|--|
| Item                  | Description  | Unit                 | 7.5MVA | 2.5MVA |  |
| 28.                   | Total weight of complete transformer erected at site   | tons                 |        |        |  |
| 29.                   | Weight of transformer as arranged for transport  | tons                 |        |        |  |
| 30.                   | Filling medium during transport  | -                    |        |        |  |
| 31.                   | Overall dimensions of transformer completely erected at site, including bushings, radiators: |                      |        |        |  |
|                       | Length   | mm                   |        |        |  |
|                       | Width  | mm                   |        |        |  |
|                       | Height   | mm                   |        |        |  |
| 32.                   | Overall dimensions of transformer arranged for transport:                                    |                      |        |        |  |
|                       | Length   | mm                   |        |        |  |
|                       | Width  | mm                   |        |        |  |
|                       | Height   | mm                   |        |        |  |
| 33.                   | Maximum lift of core/winding assembly incl. lifting beam, slings, etc. for untanking         | mm                   |        |        |  |
| 34.                   | Rated output per fan unit  | m <sup>3</sup> /min. |        |        |  |
| 35.                   | Speed of fan motors  | rpm                  |        |        |  |
| 36.                   | Continuous rating of fan motors  | Hp                   |        |        |  |
| 37.                   | Starting current of fan motors   | A                    |        |        |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 6 of 9

| HV POWER TRANSFORMERS |   |      |        |        |  |
|-----------------------|---|------|--------|--------|--|
| Item                  | Description   | Unit | 7.5MVA | 2.5MVA |  |
| 38.                   | Efficiency of fan motors  | %    |        |        |  |
| 39.                   | Power factor of fan motors at rated output  | %    |        |        |  |
| 40.                   | Material in rating and diagram plates   | -    |        |        |  |
| 41.                   | Are on-load tap changing equipment prepared for fully automatic operation   | -    |        |        |  |
| 42.                   | Are on-load tap changing equipment prepared for local, remote control (control room) and supervisory (NCC) operation and indication | -    |        |        |  |
| 43.                   | Are on-load tap changing equipment prepared for fully automatic parallel operation with similar transformers                        | -    |        |        |  |
| 44.                   | Whether first filling of oil is included  | -    |        |        |  |
| 45.                   | Whether tap changer cubicle and wiring cabinet are provided   | -    |        |        |  |
| 46.                   | Whether winding, and top oil indicators are provided  | -    |        |        |  |
| 47.                   | Whether cooling fans are automatically operated from the winding temperature indicators   | -    |        |        |  |
| 48.                   | Whether pressure relief device is to be fitted  | -    |        |        |  |
| 49.                   | Whether Buchholz relay is fitted  | -    |        |        |  |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 7 of 9

| HV POWER TRANSFORMERS |   |      |  |        |        |
|-----------------------|---|------|--|--------|--------|
| Item                  | Description   | Unit |  | ___MVA | ___MVA |
| 50.                   | Whether all internal cabling/wiring on transformer is supplied to form a complete self contained unit | -    |  |        |        |
| 51.                   | Are the following alarms/trip signals provided:   | -    |  |        |        |
|                       | Tap changer not operating, alarm  | -    |  |        |        |
|                       | Tap changers out of step, alarm   | -    |  |        |        |
|                       | Voltage transformer failure   | -    |  |        |        |
|                       | Fan failure, alarm  | -    |  |        |        |
|                       | Oil/gas flow transformer, alarm   | -    |  |        |        |
|                       | Oil/gas flow transformer, trip  | -    |  |        |        |
|                       | On load tap changer protective relay operated, trip   | -    |  |        |        |
|                       | Oil gauge low level, alarm  | -    |  |        |        |
|                       | Oil gauge low level, trip   | -    |  |        |        |
|                       | Tap changer oil gauge level low, alarm  | -    |  |        |        |
|                       | Tap changer oil gauge level critical, trip  | -    |  |        |        |
|                       | Top oil temp. high, alarm   | -    |  |        |        |
|                       | Top oil temp. critical, trip  | -    |  |        |        |
|                       | Winding temp. high, alarm   | -    |  |        |        |
|                       | Winding temp. critical, trip  | -    |  |        |        |
| 52.                   | Are the following temperature indicators provided:  |      |  |        |        |
|                       | HV winding  | -    |  |        |        |
|                       | LV or common winding  |      |  |        |        |
|                       | TV winding  |      |  |        |        |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 8 of 9

| HV POWER TRANSFORMERS |   |        |  |        |        |
|-----------------------|---|--------|--|--------|--------|
| Item                  | Description   | Unit   |  | ___MVA | ___MVA |
| 53.                   | Are the following oil level gauges provided:<br>- Main conservator tank<br>- On-load tap changer conservator tank | -<br>- |  |        |        |
| 54.                   | Tap change indicator provided   | -      |  |        |        |
| 55.                   | Tap change in progress indicator  | -      |  |        |        |
| 56.                   | Tap changer out of step indicator   | -      |  |        |        |
| 57.                   | Potentiometer switch for remote/supervisory on-load tap changer position indicator                                | -      |  |        |        |
| 58.                   | Will the tests specified in Section 3-II - Clause 10 be adhered to?<br>If deviations, please state underneath     | -      |  |        |        |

**SCHEDULE VI-7b - INFORMATIVE DATA, POWER TRANSFORMER**

Sheet 9 of 9

| HV POWER TRANSFORMERS |  |      |        |        |  |
|-----------------------|--|------|--------|--------|--|
| Item                  | Description  | Unit | 7.5MVA | 2.5MVA |  |
| 59.                   | State all Standards applied underneath:  |      |        |        |  |
| 60.                   | State identity of transformer manufacturer and all sub-manufacturers including the parts manufactured below:<br><br>Transformer:<br>Cooling equipment<br>On-load tap changer<br>Current transformers<br>Bushings<br>Core steel<br>Oil<br>Buchholz relay<br>Breather<br>Thermometer<br><br>Other equipment to be listed by the Bidder:<br><br>-<br>-<br>-<br>-<br>- |      |        |        |  |

**SCHEDULE VI 8a - TECHNICAL GUARANTEES, DISTRIBUTION TRANSFORMERS**

Sheet 1 of 2

| DISTRIBUTION TRANSFORMER |   |       | Guaranteed Data |           |
|--------------------------|---|-------|-----------------|-----------|
| Item                     | Particulars                                     | Unit  |                 | 33/0.4 kV |
| 1.                       | Continuous Maximum Rating C.M.R.                | kVA   |                 |           |
| 2.                       | Normal voltage between phases at no load        |       |                 |           |
|                          | a) H.V.   | Volts |                 |           |
|                          | b) L.V.   | Volts |                 |           |
| 3.                       | Tappings  |       |                 |           |
|                          | a) Plus   | %     |                 |           |
|                          | b) Minus  | %     |                 |           |
| 4.                       | Performance Data at Sea Level, corrected at 75% |       |                 |           |
|                          | a) No load loss at normal primary voltage       | watts |                 |           |
|                          | b) No load loss at 10% primary over voltage     | watts |                 |           |
|                          | c) Load loss at C.M.R.                          | watts |                 |           |
|                          | d) Impedance volts at C.M.R. and normal ratio   | %     |                 |           |
|                          | e) Regulation at C.M.R. and unity power factor  | %     |                 |           |
|                          | f) Regulation at C.M.R. and 0.8 power factor    | %     |                 |           |
|                          | g) Max temperature rise at C.M.R.:              |       |                 |           |
|                          | i) Top oil by thermometer                       | °C    |                 |           |
|                          | ii) Average winding by resistance               |       |                 |           |
|                          | iii) "Hot Spot" corresponding to (ii)           |       |                 |           |



**SCHEDULE VI-8a - TECHNICAL GUARANTEES, DISTR. TRANSFORMERS** Sheet 2 of 2

| DISTRIBUTION TRANSFORMER |  |                              | Guaranteed Data |           |
|--------------------------|--|------------------------------|-----------------|-----------|
| Item                     | Particulars  | Unit                         |                 | 33/0.4 kV |
| 5.                       | Type of insulation used on windings<br>a) H.V.<br>b) L.V.  |                              |                 |           |
| 6.                       | Lightning Impulse Insulation level of:<br>a) H.V. winding<br>b) L.V. winding<br>c) Tap change equipment and connections<br>i) To earth<br>ii) Between contacts | kVpk<br>kVpk<br>kVpk<br>kVpk |                 |           |
| 7.                       | Are test certificates supplied supporting the level stated in Clause 6   | Yes/No                       |                 |           |
| 8.                       | Silica gel Breather<br>a) Make of unit fitted<br>b) Size of unit   |                              |                 |           |

**SCHEDULE VI-8b - INFORMATIVE DATA, DISTRIBUTION TRANSFORMER**

Sheet 1 of 2

| DISTRIBUTION TRANSFORMER |   |                   |  |           |
|--------------------------|---|-------------------|--|-----------|
| Item                     | Particulars   | Unit              |  | 33/0.4 kV |
| 1.                       | Transformer type (sealed or breathing)                  |                   |  |           |
| 2.                       | Type of windings<br>HV<br>LV                            |                   |  |           |
| 3.                       | Type of insulation<br>HV winding<br>LV winding          |                   |  |           |
| 4.                       | Type of tap changer                                     |                   |  |           |
| 5.                       | Tap changer designation                                 |                   |  |           |
| 6.                       | Type of axial coil supports<br>HV winding<br>LV winding |                   |  |           |
| 7.                       | Winding conductor material<br>HV winding<br>LV winding  |                   |  |           |
| 8.                       | Core laminations designation                            | -                 |  |           |
| 9.                       | Specific core loss                                      | w/cm <sup>3</sup> |  |           |
| 10.                      | Type of bushings<br>HV<br>LV                            |                   |  |           |

**SCHEDULE VI-8b - INFORMATIVE DATA DISTRIBUTION TRANSFORMERS** Sheet 2 of 2

| DISTRIBUTION TRANSFORMER |   |                |  |           |
|--------------------------|---|----------------|--|-----------|
| Item                     | Particulars   | Unit           |  | 33/0.4 kV |
| 11.                      | Bushing insulator material<br><br>HV<br>LV          |                |  |           |
| 12.                      | Creepage distance across bushings<br><br>HV<br>LV   | mm<br>mm       |  |           |
| 13.                      | Type of cooling system                              |                |  |           |
| 14.                      | Total oil quantity                                  | k              |  |           |
| 15.                      | Total weight  |                |  |           |
| 16.                      | Volume of conservator tank                          | l              |  |           |
| 17.                      | Overall dimensions<br><br>Length<br>Width<br>Height | mm<br>mm<br>mm |  |           |
| 18.                      | State all standards applied underneath:             |                |  |           |
| 19.                      | State identity of manufacturer underneath:          |                |  |           |

**SCHEDULE VI-9a- GAURANTEE DATA TELECOMMUNICATION SYSTE**

**Fiber optic cable**

| Particulars                                  | Unit                       | Employer's requirement         | Tender value |
|--|----------------------------|--------------------------------|--------------|
| Number of fibres                             | OPGW                       | $\geq 48$                      |              |
|  | ADSS                       | $\geq 48$                      |              |
| Core diameter                                | $\mu\text{m}$              | 8.3 or 9 with a 3% tolerance   |              |
| Cladding design, either matched or depressed |                            |                                |              |
| Clad diameter                                | $\mu\text{m}$              | $125.0 \pm 2$                  |              |
| Core-clad concentricity                      |                            | $< 2\%$                        |              |
| Coating diameter                             | $\mu\text{m}$              | $250.0 \pm 15$                 |              |
| Coating concentricity                        | $\geq$                     | 0.70                           |              |
| Attenuation: 1310 nm<br>1550 nm              | dB/km                      | $\leq 0.40$                    |              |
|  |                            | $\leq 0.25$                    |              |
| Bending attenuation: 1310 nm<br>1550 nm      | dB/km                      | $\leq 0.40$                    |              |
|  |                            | $\leq 0.25$                    |              |
| Temperature dependence                       | dB/km                      | $\leq 0.05$ (-20°C-<br>+85°C)  |              |
| Cut-off wavelength                           | nm                         | $\leq 1250$                    |              |
| Chromatic dispersion:                        |                            |                                |              |
| Zero dispersion at                           | nm                         | $1310 \pm 12$<br>$1550 \pm 15$ |              |
| Zero dispersion slope (max.)                 | ps/nm <sup>2</sup><br>(km) | 0.092<br>0.085                 |              |
| Mode field diameter:                         |                            |                                |              |
| 1300 nm                                      | mm                         | $9.30 \pm 0.50$                |              |
| 1550 nm                                      | mm                         | $10.50 \pm 1.00$               |              |
| IL-proof test level                          | g/m <sup>2</sup>           | $35 \times 10^6$               |              |
| Splice attenuation                           | dB/<br>splice              | 0.02                           |              |
| Connector loss                               | dB/connect<br>or           | $< 0.5$                        |              |
| <b>ODF</b>                                   |                            |                                |              |
| Manufacturer                                 | -                          |                                |              |
| Type   | -                          |                                |              |
| Number of fiber interconnections             | -                          | 96<br>48                       |              |
| Connector loss                               | dB/connect<br>or           | $< 0.5$                        |              |
| Screw on type connectors                     | -                          | yes                            |              |
| designed for 19" cubicles                    | -                          | yes                            |              |

**SCHEDULE VI-9e- Guaranteed Technical specifications SDH Multiplexer and Access Multiplexer**

| Particulars  | Unit   | Employer's requirement | Tender value |
|--|--------|------------------------|--------------|
| <b>General</b>   |        |                        |              |
| Manufacturer   |        |                        |              |
| • N x 2 MBit multiplexer equipment   | -      |                        |              |
| • terminal equipment   | -      |                        |              |
| Type(s) of   |        |                        |              |
| • N x 2 MBit multiplexer   | -      |                        |              |
| • terminal equipment   | -      |                        |              |
| Maximum extension of transmission capacity of individual terminal by adding plug in cards. | -      |                        |              |
| Ditto. for multiplexer based on 2 MBit-hierarchy.  | -      |                        |              |
| Maximum extension for multiplexer and terminal equipment racks.                            | -      |                        |              |
| Protection class(es) of terminal equipment racks.  | -      |                        |              |
| <b>Construction Requirements</b>   |        |                        |              |
| Operating principle of amplifiers: optical - optical (bit rate insensitive)                | -      | Yes                    |              |
| Operating range of fibre optic terminals.  | MBit/s | 155 (STM-1)            |              |
| Operating principle of optical transmitter.  |        |                        |              |
| <b>Optical Parameters</b>  |        |                        |              |
| Nominal operating wavelength.  |        |                        |              |
| Remaining overall system margin at start of life/end of life.                              |        |                        |              |
| Receiver sensitivity (at BER of $10^{-10}$ ) at start of life/end of life.                 |        |                        |              |
| <b>Transmission Parameters</b>   |        |                        |              |
| Bit error rate (path including terminals) at   |        |                        |              |
| • n x 2 MBit/s   | -      | $<1 \times 10^{-10}$   |              |
| Jitter performance   |        |                        |              |
| • n x 2 MBit/s   |        | acc. to G.823          |              |
| Accuracy of internal clock   | ppm    |                        |              |
| Line code (optical)  |        |                        |              |
| Line code (electrical)   |        |                        |              |
| ITU/CCITT standards (PCM equipment)  |        |                        |              |

**Specifications for GPS**

| Physical dimensions  | KPLC Requirements  | Bidders Offer |
|--|--|---------------|
| Display size, WxH  |  |               |
| Display resolution, WxH                                    | Minimum 272 x 480 pixels   |               |
| Display type   | bright, transfective 65k color TFT, dual-orientation touchscreen; sunlight readable      |               |
| Weight   |  |               |
| Battery  | rechargeable lithium-ion   |               |
| Battery life   | up to 16 hours (lithium-ion);  |               |
| <a href="#">Water rating</a>                               | IPX7   |               |
| High-sensitivity receiver                                  | Yes  |               |
| Interface  | High-speed USB   |               |
| <b>Maps &amp; Memory:</b>                                  |  |               |
| Basemap  | Yes  |               |
| Preloaded maps   | yes (topographic), some models   |               |
| Ability to add maps  | Yes  |               |
| Built-in memory  | 6 GB (With Worldwide Basemap); 3 GB (With TOPO U.S. 100K Maps)                           |               |
| Accepts data cards   | microSD™ card (not included)   |               |
| Waypoints/favorites/locations                              | 4000   |               |
| Routes   | 200  |               |
| Track log  | 10,000 points, 200 saved tracks  |               |
| <b>Features &amp; Benefits:</b>                            |  |               |
| Automatic routing (turn by turn routing on roads)          | Yes (with optional mapping for detailed roads)   |               |
| Electronic compass   | Yes (tilt-compensated 3-axis)  |               |
| Touchscreen  | Yes  |               |
| Barometric altimeter                                       | Yes  |               |
| Camera   | yes (8 megapixel with autofocus and 1080p/30fps video; LED flash; automatic geo-tagging) |               |
| <a href="#">Geocaching-friendly</a>                        | Yes (Paperless)  |               |
| <a href="#">Custom maps compatible</a>                     | Yes  |               |
| Photo navigation (navigate to geotagged photos)            | Yes  |               |
| Hunt/fish calendar   | No   |               |
| Sun and moon information                                   | No   |               |
| Tide tables  | No   |               |
| Area calculation   | Yes  |               |
| Custom POIs (ability to add additional points of interest) | Yes  |               |

|   |   |   |
|---|---|---|
| Unit-to-unit transfer (shares data wirelessly with similar units) | Yes   |   |
| Picture viewer  | Yes   |   |
| Additional Features   | <ul style="list-style-type: none"> <li>• Bluetooth® wireless technology</li> <li>• Wi-Fi connectivity</li> <li>• ANT+™ connectivity:</li> <li>• GNSS support: yes (GPS + GLONASS)</li> <li>• Near Field Communication (NFC):</li> <li>• Microphone: yes (internal for audio capture)</li> <li>• Multimedia (audio/video) support:</li> <li>• UV sensor</li> </ul> | <ul style="list-style-type: none"> <li>•</li> </ul> |

**SECTION VI**  
**SCOPE OF WORK**  
**NAIROBI**  
**OVERHEAD LINES**



**TABLE OF CONTENTS**

|           |                                      |                                     |
|-----------|--------------------------------------|-------------------------------------|
| 5.2       | SCOPE OF WORKS .....                 | 1                                   |
| 5.2.1     | <i>General</i> .....                 | 1                                   |
| 5.2.2     | <i>Factory Acceptance Test</i> ..... | 2                                   |
| 5.2.3     | <i>LINES</i> .....                   | 2                                   |
| 5.2.3.1   | LOT 1.....                           | 3                                   |
| 5.2.3.1.1 | KITENGELA .....                      | <b>Error! Bookmark not defined.</b> |
| 5.2.3.1.2 | UMOJA.....                           | <b>Error! Bookmark not defined.</b> |
| 5.2.3.1.3 | MWIHOKO .....                        | <b>Error! Bookmark not defined.</b> |
| 5.2.3.1.4 | KISERIANI.....                       | <b>Error! Bookmark not defined.</b> |
| 5.2.3.1.5 | KANGUNDO .....                       | <b>Error! Bookmark not defined.</b> |

## 5.2 SCOPE OF WORKS

### 5.2.1 General

The Bidder shall examine the scope of works in this section in close connection with the other documents and particulars forming these Bidding Documents.

Special attention shall be paid to Technical Specifications, in which the general technical requirements are specified. The drawings enclosed in are for bidding purposes only.

If the Specifications and/or Drawings do not contain particulars of materials or goods that are necessary for the proper and safe completion, operation and maintenance of the equipment in question, all such materials shall be deemed to be included in the supply.

In the event of any conflict between the Drawings and the Specifications, the latter shall prevail.

In the event of any conflict between scaled dimensions and figures on the Drawings, the figures shall prevail.

Should the Bidder find discrepancies in or omissions from these Specifications or from the other Documents, or should he be in doubt as to their meaning, he should immediately contact the Project Manager for interpretation, clarification or correction thereof before submitting his Bid. Such action shall, however, in no case be considered as a cause for altering the closing date of the Bid.

The scope of work covers supply of equipment, engineering and design, manufacture, testing before shipment and packing sea worthy or otherwise as required, delivery of all equipment CIP site, construction and installation and commissioning.

Where the new line share the route with existing lines, the scope of work shall include all the necessary works/modifications that will be required to accommodate the lines along the same route. The hardware/fittings and conductors of the existing lines shall be re-used.

The term "reconductoring" in this scope of works shall mean supply of new conductors, new hardware/fittings and new poles as well as installation of this in the existing line routes. It also includes moving all equipment, such as distribution transformers, autoreclosers, switches and links, capacitor banks etc, attached to the present poles over to the new poles. All existing poles, conductors and hardware/fittings shall be recovered and handed over to the KPLC at locations to be informed.

Cross arms:

Steel cross-arms shall be used in all cases including re-conductoring

Poles:

Concrete poles shall be used in all cases.

Shield Wires:

Shield wires shall be used in all the 66 kV and 33kV Lines. The standard size used by KPLC is 25 mm<sup>2</sup>.

GPS  
Hand Held Sets for use in Survey Works

### **5.2.2 Factory Acceptance Test**

The Employer shall witness the tests of main equipments at the factory before their shipment. The Employer shall be in charge of the travel, accommodation and per diem costs of its personnel. The following major equipment shall be offered for inspection:

- 300mm sq AAA conductor
- 150mm sq ACSR conductor
- 75mm sq ACSR conductor
- OPGW
- ADSS
- Insulators

FAT shall be carried out as prescribed in the particular technical specification.

### **5.2.3 LINES**

5.2.3.1 **LOT 1**5.2.3.1.5 **KITENGELA**

| <b>Item</b> | <b>Description</b>  | <b>Unit</b> | <b>Qty</b> |
|-------------|---|-------------|------------|
| KITE - 201  | 66 kV OH Line including 300 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 20         |
| KITE - 202  | 11 kV OH line including 150 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 10         |
| KITE – 203  | OPGW  | Lot/km      | 20         |
| KITE – 204  | ADSS  | Lot/Km      | --         |
| KITE – 205  | Optical Distribution frame  | Each        | 2          |
| KITE-206    | GPS-Hand Held Set   | No          | 1          |
|             | <b>Works:</b>   |             |            |
| KITE – 208  | Civil works   | 1 lot       | <b>1</b>   |
| KITE - 209  | Erection, stringing, and commissioning  | 1 lot       | <b>1</b>   |
|             |   |             |            |

5.2.3.1.5 **MWIHOKO**

| <b>Item</b> | <b>Description</b>  | <b>Unit</b> | <b>Qty</b> |
|-------------|---|-------------|------------|
| MWHK - 201  | 66 kV OH Line including 300 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 20         |
| MWHK - 202  | 11 kV OH line including 150 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 10         |
| MWHK – 203  | OPGW  | Lot/km      | 20         |
| MWHK – 204  | ADSS  | Lot/Km      | --         |
| MWHK – 205  | Optical Distribution frame  | Each        | 2          |
| KITE-206    | GPS-Hand Held Set   | No          | 1          |
|             |   |             |            |
|             | <b>Works:</b>   |             |            |
| MWHK – 208  | Civil works   | 1 lot       | <b>1</b>   |
| MWHK - 209  | Erection, stringing, and commissioning  | lot         | <b>2</b>   |

**5.2.3.1.5 UMOJA**

| <b>Item</b> | <b>Description</b>  | <b>Unit</b> | <b>Qty</b> |
|-------------|---|-------------|------------|
| UMOJ - 201  | 66 kV OH Line including 300 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 15         |
| UMOJ - 202  | 11 kV OH line including 150 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 10         |
| UMOJ – 203  | OPGW  | Lot/km      | 15         |
| UMOJ – 204  | ADSS  | Lot/Km      | --         |
| UMOJ – 205  | Optical Distribution frame  | Each        | 2          |
| KITE-206    | GPS-Hand Held Set   | No          | 1          |
|             |   |             |            |
|             | <b>Works:</b>   |             |            |
| UMOJ– 208   | Civil works   | 1 lot       | <b>1</b>   |
| UMOJ - 209  | Erection, stringing, and commissioning  | 1 lot       | <b>1</b>   |

**5.2.3.1.5 KISERIAN**

| <b>Item</b> | <b>Description</b>  | <b>Unit</b> | <b>Qty</b> |
|-------------|---|-------------|------------|
| KISE - 201  | 66 kV OH Line including 300 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 6          |
| KISE - 202  | 11 kV OH line including 150 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 10         |
| KISE – 203  | OPGW  | Lot/km      | 6          |
| KISE – 204  | ADSS  | Lot/Km      | --         |
| KISE – 205  | Optical Distribution frame  | Each        | 2          |
| KITE-206    | GPS-Hand Held Set   | No          | 1          |
|             |   |             |            |

|           | <b>Works:</b>                          |     |          |
|-----------|--|-----|----------|
| KISE- 208 | Civil works                            | lot | <b>1</b> |
| KISE- 209 | Erection, stringing, and commissioning | lot | <b>1</b> |

### 5.2.3.1.5 KANGUNDO

| <b>Item</b> | <b>Description</b>  | <b>Unit</b> | <b>Qty</b> |
|-------------|---|-------------|------------|
| KANG - 201  | 66 kV OH Line including 300 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 5          |
| KANG - 202  | 11 kV OH line including 150 mm <sup>2</sup> ACSR line conductors, poles, insulators, isolators, fittings and other necessary equipment. | Lot/km      | 10         |
| KANG – 203  | OPGW  | Lot/km      | 5          |
| KANG – 204  | ADSS  | Lot/Km      | --         |
| KANG – 205  | Optical Distribution frame  | Each        | 2          |
| KITE-206    | GPS-Hand Held Set   | No          | 1          |
|             |   |             |            |
|             | <b>Works:</b>   |             |            |
| KANG– 208   | Civil works   | lot         | <b>1</b>   |
| KANG- 209   | Erection, stringing, and commissioning  | lot         | <b>1</b>   |

**SECTION - VI**

**PARTICULAR TECHNICAL SPECIFICATIONS  
Overhead Lines**

## TABLE OF CONTENTS

|          |   |    |
|----------|---|----|
| 5.1      | PARTICULAR TECHNICAL SPECIFICATIONS – 66, 33 AND 11 kV OVERHEAD LINES ..... | 1  |
| 5.1.1    | <i>Nature and Extent of Work</i> .....                                      | 1  |
| 5.1.2    | <i>Design</i> .....   | 1  |
| 5.1.3    | <i>Factor of Safety</i> .....   | 1  |
| 5.1.4    | <i>Working Conditions</i> .....   | 2  |
| 5.1.5    | <i>Clearances and Spans</i> .....   | 2  |
| 5.1.5.1  | Medium overhead lines minimum clearances at operating temperatures:- .....  | 2  |
| 5.1.5.2  | Additional Clearances .....   | 2  |
| 5.1.5.3  | Special Clearances .....  | 2  |
| 5.1.6    | <i>Environmental Requirements</i> .....                                     | 3  |
| 5.1.6.1  | Wayleaves .....   | 3  |
| 5.1.7    | <i>Standards</i> .....  | 4  |
| 5.1.8    | <i>Units of Measurements</i> .....  | 4  |
| 5.1.9    | <i>Materials</i> .....  | 4  |
| 5.1.10   | <i>Line Supports and Foundations</i> .....                                  | 5  |
| 5.1.10.1 | Physical and Mechanical Properties of Wood poles .....                      | 5  |
| 5.1.10.2 | Strength and Species .....  | 5  |
| 5.1.10.3 | Pole Caps .....   | 5  |
| 5.1.10.4 | Safety .....  | 6  |
| 5.1.10.5 | Excavation .....  | 6  |
| 5.1.10.6 | Erection .....  | 6  |
| 5.1.10.7 | Pole Dressing .....   | 6  |
| 5.1.10.8 | Back Filling .....  | 6  |
| 5.1.10.9 | Bolts Nuts and Washers .....  | 8  |
| 5.1.11   | <i>Insulators and Fittings</i> .....  | 8  |
| 5.1.11.1 | Insulators .....  | 8  |
| 5.1.11.2 | Insulator Fittings .....  | 9  |
| 5.1.11.3 | Pin Insulators .....  | 9  |
| 5.1.11.4 | Porcelain Disc Insulators .....   | 10 |
| 5.1.11.5 | Post Insulators .....   | 10 |
| 5.1.12   | <i>Cross Arms</i> .....   | 10 |
| 5.1.12.1 | Steel Cross Arms .....  | 10 |
| 5.1.12.2 | Standard Sizes .....  | 12 |
| 5.1.12.3 | Markings .....  | 12 |
| 5.1.13   | <i>Line Formation</i> .....   | 12 |
| 5.1.14   | <i>Stay, Stay Insulators and Stay Blocks</i> .....                          | 13 |
| 5.1.14.1 | Stay .....  | 13 |
| 5.1.14.2 | Stay Insulator .....  | 13 |
| 5.1.14.3 | Stay Block .....  | 13 |
| 5.1.15   | <i>Conductor</i> .....  | 13 |
| 5.1.15.1 | Conductor Characteristics .....   | 13 |
| 5.1.15.2 | Joints, Clamps and Connectors .....   | 14 |
| 5.1.15.3 | Drums .....   | 16 |
| 5.1.15.4 | Markings of Drums .....   | 16 |
| 5.1.15.5 | Reconductoring .....  | 17 |
| 5.1.16   | <i>Safety</i> .....   | 17 |
| 5.1.17   | <i>Operation Devices and Protection Systems</i> .....                       | 17 |
| 5.1.17.1 | Isolation .....   | 18 |



## 5.1 Particular technical specifications – 66, 33 AND 11 kV OVERHEAD LINES

### 5.1.1 Nature and Extent of Work

The work covered by this Specification forms part of the KPLC's Distribution and Reinforcement Project and is for design, survey, supply, installation and commissioning of new 66, 33 and 11 kV Overhead Lines as well as re-conductoring of 33 and 11 kV Overhead Lines as specified herein and in the Attachments. The overhead lines will form part of KPLC's transmission and distribution system.

The Contract Works to be supplied shall be carried out by the Contractor in accordance with the Specification and Condition of Contract and shall comprise the following:

Three-phase overhead distribution lines having the technical particulars set out in the Technical Schedules and Drawings attached to the Specification, the lines being complete with the survey, line conductors, insulators and fittings, poles and crossarms, earthing (where required) and connections, and all other fittings necessary to have a complete distribution line.

### 5.1.2 Design

The following drawings shall be submitted by the Contractor according to the time schedule for approval:

- . Route maps
- . Longitudinal profiles
- . Tables showing the capacity of the poles related to wind and weight span for the actual conductor sizes
- . Sag tables for the actual conductor types for stringing conditions and included compensation for creep
- . Erection drawings for insulator sets, fittings and cross arms
- . Pole foundation

### 5.1.3 Factor of Safety

The minimum factor of safety at assumed maximum simultaneous working loading shall be as follows:

- i) Line conductors based on ultimate strength

|                 |     |
|-----------------|-----|
| Max tension     | 3.0 |
| Everyday stress | 5.0 |
  
- ii) Insulator and fittings, based upon electro-mechanical test and minimum failing load

|  |     |
|--|-----|
| Insulators and insulator fittings      | 2.5 |
| Dead-end clamps and conductor fittings | 2.5 |
  
- iii) Steel structures, bolts and other steel pole members based on elastic limit of tension members and on crippling loads of compression members:

|                             |     |
|-----------------------------|-----|
| Steel Structures            | 2.5 |
| (Including steel cross arm) |     |
| Bolts, nuts and washers     | 2.5 |

- iv) Supports, stays and cross arms subjected to the longitudinal transverse and vertical loads resulting in the lading conditions stated above:

|                               |     |
|-------------------------------|-----|
| Wood supports and cross arms  | 3.5 |
| Concrete structures           | 2.5 |
| Steel supports and cross arms | 2.5 |
| Stay assembly and fittings    | 2.5 |
| Foundation – Concrete         | 2.5 |

#### 5.1.4 Working Conditions

The maximum assumed working conditions shall be as follows:-

- i) Minimum temperature of line 5oC
- ii) Ambient temperature of line conductor 35oC
- iii) Maximum temperature of line conductors 65oC (70oC)
- iv) Wind pressure on the whole projected area of conductors 400N/m<sup>2</sup>
- v) Wind pressure on projected are of insulator 400N/m<sup>2</sup>
- vi) Wind pressure on projected are of support 400N/m<sup>2</sup>
- vii) Altitude: 0 – 2200 meters above sea level.

#### 5.1.5 Clearances and Spans

##### 5.1.5.1 Medium overhead lines minimum clearances at operating temperatures:-

- i) Lines not exceeding 11kV across or along road: 5.8m (19ft)
- ii) Lines not exceeding 11kV over private land: 5.2m (17ft)
- iii) Lines not exceeding 33 kV over private land: 5.8 m
- iv) Lines not exceeding 66kV over private land: 6.2m (20ft)

##### 5.1.5.2 Additional Clearances

- i) 11 kV line conductor to any part of the building 2.7m (8ft. 8 inch).
- ii) 33 kV line conductor to any part of the building) 5m
- iii) 66 kV line conductor to any part of the building 7.5 m

##### 5.1.5.3 Special Clearances

###### a) Railway crossing clearances

- i) All types of line including guard nets – 8.1m (30f)
- ii) The minimum clearance of any pole or structure from the centre of a tract shall be the height of the pole above ground plus 2.1m (7ft).
- iii) Where the tract is in a cutting, no such pole shall be closer to the edge of the cutting than a distance equal to the height of the pole.

###### b) Kenya Posts and Telecommunications Installation Clearances

- i) Guard net – 1.3m (4ft)  
Up to 66kV conductors using cradle guard – 1.8m (6ft)
- ii) Angles of crossing  
Medium voltage, not less than 60°

### 5.1.6 Environmental Requirements

The Contractor shall undertake to complete all works in accordance with statutory requirements including those of:

- i) The Kenya Wildlife (Management and Conservation Act) Applicable for all works inside National Parks.
- ii) The Kenya Agricultural Act - Concerning protection against soil erosion.
- iii) Public Health Act – Concerning with noise, water and air quality as they relate to human health.
- iv) Chief Authority Act – Concerning the regulation of timber cutting and wasteful destruction of trees and avoidance of damage to the public road or other community facilities.
- v) The Local Government Act – Section 145 for preservation or protection of wildlife and Section 163 regarding noise disturbance controls.

The Contractor shall take reasonable precautions to avoid damage to land, property, crops, etc. and shall ensure that the work is adequately supervised so that damage is reduced to the minimum. All surplus material shall be removed after erection and site shall be left in a clean and tidy condition, to the satisfaction of the Purchaser.

Where the Contractor considers that damage cannot be avoided if the work is to proceed normally he shall notify the Purchaser accordingly. The Purchaser will coordinate and facilitate assistance with the landowner concerned during negotiations for compensation. The Contractor will be responsible for compensation in respect of damage and the Contractor shall proceed with the work within the limits indicated by the Purchaser.

Where temporary removal of bound, wall or similar obstacles is necessary for the purpose of foundation installation or support erection, the cost of removal and subsequent reinstatement shall be deemed included in the Contract rates for foundation and support erection.

Where it is necessary to provide scaffolding over roads, railways or telecommunication lines in order not to interfere with the passage of traffic, this shall be carried out by the Contractor at such times as may be convenient to the Authority concerned. Flagman and approved types of danger and warning notices shall be provided by the Contractor to ensure safety of the public.

#### 5.1.6.1 Wayleaves

Wayleaves shall be provided by the Purchaser to enable the Contractor to carry out the Works. In order to provide wayleave the Purchaser has to obtain approvals from Government and other statutory authorities, and also consents from owners and occupiers of property which will be affected by the lines.

The procedure for obtaining approvals and consents is dependent on preliminary profile survey, as described below:

- a) Representatives of the Purchaser will accompany Contractors staff during preliminary survey. The Purchaser's representatives will issue notices to and liaise with landowners and occupiers in order to establish rights of entry for survey and agreement to limited cutting of vegetation as specified.
- b) Upon approval by the Purchaser of preliminary survey the Purchaser will initiate procedures for obtaining wayleave, and when necessary approvals and consents

have been granted the Purchaser will arrange for trees etc. to be cleared from the line route as specified.

- c) Upon approval by the Purchaser of the position of support centre pegs the Contractor shall submit access maps as specified and the Purchaser will obtain the necessary rights of construction access for the Contractor.
- d) Wayleaves procedures as described above will take place concurrently with profile survey, approval of centre pegs, etc. The Contractor shall allow in his programme for a period of up to two months from approval of preliminary lines to the grant of right of access for its construction.
- e) Any conditions for the wayleave should be made known to the Contractor.
- f) The wayleave procedures shall lead the construction programme for each section of the Contract.

#### **5.1.7 Standards**

Unless another standard is mentioned in this Specification, all materials used and provided under this contract and all services performed must be in accordance with the latest amendments of the Standards of the International Electro-technical Commission (IEC) or British Standards (BS), applicable Kenyan Standards and the attached Material Specifications.

Suppliers who do not normally manufacture to IEC or BSI Standards may offer equipment in accordance with other recognized national Standards provided that they draw attention to any essential differences between their Standards and IEC/BSI Standards and Subject to the satisfaction of the Employer that the quality, finish and performance of the equipment complying with such standards shall be comparable to that complying with IEC or BS.

#### **5.1.8 Units of Measurements**

SI units (System International) shall be used in all the technical schedules and drawings.

#### **5.1.9 Materials**

Each of the several parts of the line shall be of such construction and design as to give long and continuous service with high economy and low maintenance costs.

All material used and equipment provided under this contract shall be new and of the best quality and workmanship and shall be of the highest class throughout with the designs and dimensions of all parts such that mechanical and electro-mechanical stresses which they are subjected shall not render them liable to distortion or damage under most severe conditions encountered in service. Repair of any defective parts shall not be permitted without the sanction in writing of the Project Manager.

The detailed design shall be carried out in manner to facilitate inspection, repairs and simplicity of operations and maintenance. All materials shall ensure satisfactory operations under the atmospheric conditions prevailing in the area where the lines are to be built, irrespective of season and under such variations of load and voltage as may occur under working conditions of the system. Line supports, conductors, insulators and fittings shall be such as to minimize the risk of damage due to deterioration, or damage in service of any part of the line. The design shall incorporate any reasonable precaution and provision for the safety for those concerned in the maintenance of the Contract Works and all associated works supplied and executed under other contracts.

All corresponding parts shall be made to gauge, shall be inter-changeable wherever possible throughout the Contract Works and are to be such as will facilitate the fitting of replacement.

### 5.1.10 Line Supports and Foundations

The network shall be supported on wood poles, however alternative supports such as concrete and steel structures may be considered. The wood poles shall meet specifications set in Kenya Power and Lighting Co Ltd: Specification for Wood Pole and Kenya Standard KSO2-516: Poles for power and telecommunications lines. The concrete poles shall meet the specifications set in Kenya Power and Lighting Co. Ltd; Specifications for Concrete Pole Kenya Standard DKS 1933.

The poles can be of single pole type or H-pole type, with or without stay wires, with insulator chains or pin or post insulators, depending on the actual conditions and the approved design.

#### 5.1.10.1 Physical and Mechanical Properties of Wood poles

The wood poles (Eucalyptus Saligna) used shall have the following properties:-

|                     |        |        |       |        |       |        |       |
|---------------------|--------|--------|-------|--------|-------|--------|-------|
| Nominal length      | 10     | 11     | 11    | 12     | 12    | 14     | 14    |
| Category            | Medium | Medium | Stout | Medium | Stout | Medium | Stout |
| H(mm)               | 1.8    | 1.8    | 1.8   | 1.8    | 1.8   | 2.0    | 2.0   |
| D <sub>c</sub> (mm) | 220    | 230    | 295   | 240    | 305   | 248    | 310   |
| D <sub>m</sub> (mm) | 150    | 160    | 200   | 160    | 200   | 160    | 200   |
| D <sub>g</sub> (mm) | 220    | 230    | 295   | 240    | 305   | 270    | 335   |
| D <sub>e</sub> (mm) | 175.9  | 185.6  | 234.8 | 189    | 238.1 | 199.4  | 248.4 |
| F(kN)               | 5.90   | 4.94   | 13.05 | 4.03   | 10.37 | 3.45   | 8.23  |
| Ultimate load (kN)  | 8.64   | 8.73   | 18.42 | 8.89   | 18.24 | 10.46  | 20.02 |
| Crippling load (kN) | 59.4   | 58.6   | 149.8 | 51.2   | 128.9 | 45.9   | 110.3 |

- H Ground position from butt
- d<sub>c</sub> Critical diameter
- d<sub>g</sub> Minimum groundline diameter (mm)
- d<sub>m</sub> Minimum top diameter (mm)
- d<sub>e</sub> Effective diameter
- f Load per mm of deflection at point of application of load

Note that the mechanical properties used in the mechanical calculations are those stated in the Kenya Standard KSO2-516.

#### 5.1.10.2 Strength and Species

Wood poles shall be of eucalyptus timber and shall belong to the strength groups Light, Medium or Stout as specified. The treatment shall be creosote pressure-treated wood, or Chromated copper arsenate (CCA).

#### 5.1.10.3 Pole Caps

Pole caps of approved type shall be used.

**5.1.10.4 Safety**

All poles shall have a DANGER/HATARI warning plate, placed at a visible point in the pole at a height of 1.7m and legible from a distance of at least 2m.

**5.1.10.5 Excavation**

The hole for the pole shall be excavated to a minimum of 1.8m for the 11m pole. If the base of the hole is not firm ground, the hole shall be excavated until firm ground is reached, otherwise the pole has to be placed on a flat rock block, min. 40 x 40 cm or a timber raft, min 80 x 80 cm., depending on the conditions.

The minimum hole depth for wood poles shall be defined in the table:-

| Pole Height<br>H (m) | Size   | Hole Depth<br>Minimum (m) |
|----------------------|--------|---------------------------|
| 10                   | Medium | 1.6                       |
| 11                   | Medium | 1.8                       |
| 11                   | Stout  | 1.8                       |
| 12                   | Medium | 2.0                       |
| 12                   | Stout  | 2.0                       |
| 14                   | Medium | 2.2                       |
| 14                   | Stout  | 2.2                       |
| 15                   | Stout  | 2.4                       |
| 17                   | Stout  | 2.6                       |

The hole shall be dug to the required depth. Any holes left overnight must be covered in such a way that they do not pose any danger to persons or animals. A suitable method of warning shall be used to identify positions of the holes.

**5.1.10.6 Erection**

The butt of the pole is laid over the hole with the length in the direction of the line. A skid board is placed against the hole to facilitate the entry of the butt when the pole is raised and prevent earth breaking into the hole during the process of erection.

Erection of the poles shall be done using any of the following methods:

- i) Erection ladders
- ii) Truck mounted hydraulic lifts
- iii) Guy ropes shall be used to prevent accident and to hold pole in a true vertical position. The pole is gradually raised to the vertical position and the butt guided in to the hole.

**5.1.10.7 Pole Dressing**

Partial dressing can be done while the poles are lying on the ground; in this case care must be taken during erection to avoid the fittings being damaged. The fitting of the insulator shall be done after the pole has been erected.

**5.1.10.8 Back Filling**

After erecting the pole and positioned it vertically, the pole shall be secured in this position by help of stones blocks placed in 2 or 3 layers, one layer at the bottom of the hole, and one to two layers at the top. The stones shall fill out the area between the pole and the wall and will secure that the pole remains vertical during the pole's lifetime.

Between the layers of stone and above the top layer, the excavated soil can be used as backfill material if the origin soil is appropriate for tamping.

The soil should be wet and backfilled slowly and each layer thoroughly tamped until the tamp makes a solid sound as the earth is stuck. Each tamping layer should not exceed 150 mm. If small stones or gravel are readily available, these should be mixed with the soil used in backfilling.

In areas where the ground is unsuitable for firm erection of poles i.e. swampy areas with black cotton soil etc the pole has to be placed on a flat rock block or on timber raft as described under Excavation on previous page. It may also be necessary to change out the soil material around the pole.

#### **5.1.10.10 Design, Materials and Construction of Concrete Poles**

The concrete poles shall be designed and manufactured in accordance with Kenya Standard DKS 1933.

The poles shall be round, Prestressed or Reinforced Concrete Poles as per DKS 1933.

The materials used shall be in conformity with the design standard (DKS 1933) and shall be selected to suit intended application.

The pole shall be so designed that its strength in transverse direction shall be sufficient to take the load due to wind on conductors, fittings and the pole.

In accordance with Annex A of DKS 1933, the aggregates used in the manufacture of the pole shall be free from veins and adherent coating and free from injurious amount of disintegrated pieces, alkali, vegetable matter and other deleterious substances. As far as possible, flaky, scoriaceous and elongated pieces shall be avoided.

The surface of all reinforcement shall be free from loose scale, oil, grease, clay or other material that may have deleterious effect on the bond between the reinforcement and concrete.

The mix design, mixing and compaction of the concrete shall be such that the necessary strength in the pole is obtained after curing in accordance with DKS 1933.

Concrete shall be compacted by vibration, centrifugation or other efficient means. Hand compaction shall not be permitted.

The finished pole shall have a smooth external surface that is free from honeycombing.

A quarter ( $\frac{1}{4}$ ) of the poles supplied for each consignment shall incorporate an integral earthing system comprising a non stressed internal earthing copper conductor (at least 70mm<sup>2</sup> stranded conductor) running the length of the pole and the ends of the conductor shall be left projecting from the pole to a length of 100mm at 200mm from top and 150mm below ground level. Manufacturer may offer alternative suitably designed earthing termination for consideration.

#### **5.1.10.11 Physical and Mechanical Properties of Concrete Poles**

The concrete poles shall conform to the following standard sizes:

| <b>Nominal Length</b> | <b>Top Diameter</b> | <b>Working Load</b> | <b>Ultimate Load (kN)</b> | <b>Strength Class (as per DKS)</b> | <b>Minimum Depth in</b> |
|-----------------------|---------------------|---------------------|---------------------------|------------------------------------|-------------------------|
|-----------------------|---------------------|---------------------|---------------------------|------------------------------------|-------------------------|

| (m) | (mm) | (kN) |   | 1933) | Ground (m) |
|-----|------|------|---|-------|------------|
| 10  | 190  | 2.5  | 5 | 50    | 1.8        |
| 11  | 190  | 2.5  | 5 | 50    | 1.8        |
| 12  | 190  | 3.0  | 6 | 50    | 1.8        |
| 13  | 190  | 3.0  | 6 | 50    | 2.0        |
| 15  | 190  | 3.0  | 6 | 50    | 2.1        |

The required safety factor is 2.5 and pole taper for the Prestressed Concrete Pole shall be at least 13mm per meter.

Poles shall be supplied complete with suitably designed fittings for conductor and stay wire characteristics.

#### 5.1.10.12 Marking

Each concrete pole shall be marked permanently by impressing on the pole (or by use of a permanently secured plate) at a position 1.5m above the pole Ground line with the following details:

- Manufacturer's name
- Date of manufacture (mm/yy)
- Length of pole (meters) and Tip dimensions (mm)
- Ultimate/Working load/Strength Class
- Type of pole
- Weight of pole
- Standard to which the pole complies
- The words "PROPERTY OF KPLC"

Ground line reference mark shall be conspicuous on the pole.

Where a plate is used it shall be made of stainless steel, securely affixed to the pole. In all cases the lettering shall be not less than 5mm high legibly impressed.

#### 5.1.10.9 Bolts Nuts and Washers

All bolts and nuts shall conform to BS 4190 and shall preferably have screwed threads of I.S.O. form. Nuts and heads of all bolts shall be of the hexagonal type. All bolts and screw rods shall be galvanized including the threaded portion. All nuts shall be galvanized with the exception of the threads, which shall be oiled.

#### 5.1.11 Insulators and Fittings

##### 5.1.11.1 Insulators

Insulation between conductors and support shall be of both disc, pin and post insulators and shall comply in all respects with IEC 305, 383 and 120, 1109 and 815 or such other standard as may be approved and with the requirements set out in this Specification and in the Technical Schedules.

Insulator units shall be glazed porcelain or composite type by approved manufacturers who shall have had at least ten years experience of supplying complete insulator units to



international purchasers. Technical particulars and service histories must be submitted for the type of insulator offered. Insulator units shall where possible be interchangeable with units already in use on the Employer's system.

All insulators shall be designed with a view to service in a tropical climate in an area subject to lightning storms, at an altitude of about 2200 m above sea level.

Insulator strings shall consist of minimum quantity of 6 units for 66kV, 3 units for 33 kV and 2 units for 11kV at 146 mm centre distance between each disc. The actual numbers and types of discs shall be selected to suit the requirements set out in the technical schedules.

Locking devices for the insulator units themselves and for associated ball and socket and fittings shall be of stainless steel and shall comply with IEC 372. The assembly shall be such as to allow easy removal for replacing of insulator units or fittings without the necessity to remove the insulator string from the crossarms.

All ball and socket joints on insulator sets shall be lightly coated with approved grease before erecting.

Each insulator shall be marked with the name or trade mark of the manufacturer and the year of manufacture in accordance with IEC Publication 60383. In addition, each insulator shall be marked with the specified electromechanical or mechanical failing load in conformity with IEC Publication 60383.

#### 5.1.11.2 **Insulator Fittings**

Fittings shall comply with BS.3288: Part 1 or such other standard as may be approved and shall be so designed that replacement of string insulator units and the arcing protection system can easily be performed during maintenance or repair under outage or live-line conditions.

All clamps shall be as light as possible and shall be designed to avoid any possibility of deforming the stranded conductors and separating the individual strands.

Bolts and nuts shall be in accordance with an approved specification. Bolt threads shall be coated with approved grease immediately before packing. Split pins for securing attachment of fittings of insulator sets shall be of stainless steel and shall be packed by washers of approved size and gauge.

All insulator strings shall be attached to crossarms by means of shackles or swivels. Hooks shall not be used.

#### 5.1.11.3 **Pin Insulators**

Pin insulator shall be used for intermediate line poles and for small angles up to 20°.

On pin insulators, the conductor shall be bound in on top of the groove, using two suitable stirrups in each case. The bind shall be formed of a single layer of closely wound wire, extending at least 25 mm beyond the stirrups. The bind shall be wound on opposite directions, on each side of the insulator.

With aluminium conductor, the bind shall be formed of two stirrups, with 2.5 mm diameter aluminium binding wire. In addition, aluminium armour tape shall be used, wrapped in a direction opposite to that of the conductor lay. The armour tape shall cover

the portion of the conductor that is in contact with the insulator, and extend at least 40 mm under the bind.

#### 5.1.11.4 **Porcelain Disc Insulators**

Porcelain discs insulators will be used where increased tensile strength in the conductors is envisaged i.e. flying angles, section and terminal poles.

The table below gives creepage distance requirement in relation to pollution

| Type of pollution | Creepage distance |
|-------------------|-------------------|
| Low               | 18-22 mm/kV       |
| Medium            | 22-35 mm/kV       |
| Extreme           | > 35 mm/kV        |

Where there is severe lighting activity, high insulation and creepage values are necessary.

#### 5.1.11.5 **Post Insulators**

Post insulators will be used for 66 kV lines in high pollution areas.

### 5.1.12 **Cross Arms**

The following types of cross-arms shall be used depending on the limiting factor:

#### 5.1.12.1 **Steel Cross Arms**

Steel cross arms shall be used in all cases as required.

Steel Crossarms shall be used extensively in the line making different formations. The choice of the formation will be determined based on the following:

- i) Environmental conditions
- ii) Landscape
- iii) Available space

The steel crossarm shall be suitable for continuous operation outdoors in tropical areas at altitudes of up to 2200m above sea level, humidities of up to 90%, average ambient temperature of +30°C with a minimum of -1°C and a maximum of +40°C and saline conditions along the coast.

#### 5.1.12.1 **Materials**

Structural steel used, shall be grade 43A as specified in the BS 4360: "Specification for weldable structural steel".

The tensile strength and yield stress of the steel shall be not less than 430/510 N/sq. mm and 255 N/sq. mm respectively.

Angle sections shall be as per BS 4848

Channel sections shall be as per BS 4

### **5.1.12.2 Welding**

Welding where specified shall be by metal-arc welding and shall be as per BS 5135.

After welding and before galvanising, welds shall be thoroughly cleared to remove slag and spatter, preferably by sand blasting.

All materials before and after fabrication shall be straight and free from twists. The material shall be free from blisters, scale and other defects.

All dimensions specified shall be subject to the following tolerances, unless otherwise stated.

(i) Dimensions up to and including 50 mm:  $\pm 1$  mm

(ii) Dimensions greater than 50 mm:  $\pm 2$  mm

Erection clearance for cleated ends of members connecting steel to steel shall not be greater than 2mm at each end.

Bolt holes shall not be more than 2mm greater than the diameter of the bolt for bolts up to 24mm diameter.

Cutting may be by shearing, cropping, sawing or machine flare cutting. Sheared or cropped edge shall be dressed to a neat finish and be free from distortion where parts are to be in metal contact.

All holes shall be drilled in one operation and burrs shall be removed. Holes shall not be formed by a gas cutting process. All matching holes for bolts shall register with each other so that a gauge 2mm less in diameter than the diameter of the bolt shall pass freely through the assembled members in a direction at right angle to such members.

### **5.1.12.3 Galvanizing**

All materials to be galvanized shall be of the full dimensions shown or specified and all punching, cutting, and the removal of burrs shall be completed before the galvanizing process commences.

All galvanizing shall be done by the hot dip process with spelter, not less than 98% of which must be pure Zinc and in accordance with BS 729.

The Zinc coating shall be uniform, clean, smooth and as free from spangle as possible.

Galvanized steel structures shall be treated after galvanizing with Sodium Dichromate Solution.

Galvanizing

|                                |   |
|--------------------------------|---|
|                                | Steel Structures for Inland installations |
| Minimum Average Coating Weight | 610 g/m <sup>2</sup>                      |

Bending of flat straps shall be carried out cold.

#### 5.1.12.2 Standard Sizes

The standard sizes of the different cross arms shall be as shown on the table below:-

| APPLICATION   | Standard Length (mm) | CROSS SECTION |            |           |
|---|----------------------|---------------|------------|-----------|
|   |                      | Height (mm)   | Width (mm) | Thickness |
|   |                      |               |            |           |
| 11kV interpole. Up to 150mm <sup>2</sup> conductor.                                     | 1626                 | 70            | 70         | 9.5       |
| 11kV Section/Angle up to 60 <sup>o</sup> /terminal. Up to 150mm <sup>2</sup> conductor. | 2290                 | 125           | 70         | 9.5       |
| 33kV Interpole  | 2400                 | 100           | 76         | 9.5       |
| 33kV Section/Angle pole/ Terminal   | 2400                 | 125           | 76         | 9.5       |

#### 5.1.12.3 Markings

The cross arms shall be marked legibly and indelibly on an aluminium tag size not less than 400mm x 200mm fixed at a distance of between 150mm and 350mm from the end. The thickness of the aluminium shall not be less than 0.9mm (SWG 20).

The tag shall be stamped with the following information:-

- i) Identification mark or name of the plant where cross arm was treated.
- ii) Date of treatment, comprising the first two digits for the month and the last two digits for the year.

The letters and figures shall be at least 10mm high.

#### 5.1.13 Line Formation

The following is a recommendation for the use of the different common line formations:

- i) Line poles for deviations 0°-10°, Steel cross arm will be used for horizontal and delta formations.
- ii) Line poles for deviation 20o-60o, double cross-arms or vertical flying angle shall be used.
- iii) Line poles for deviations greater than 60o, vertical sections shall be used.

**5.1.14 Stay, Stay Insulators and Stay Blocks**

**5.1.14.1 Stay**

Stay wires shall be in conformity with the attached Specification for Stay Wires and Guy Grips.

The dimension of stay wires used shall be in accordance with the actual load taking into consideration the Safety Factor given.

The stay wires shall with first-class workmanship be fastened to the pole to assure that they are keeping the pole in a vertical position during the pole's lifetime.

**5.1.14.2 Stay Insulator**

A sling type strain insulator shall be inserted in each stay 1.6m from the top.

**5.1.14.3 Stay Block**

A reinforced concrete stay block buried to the depth of 1.4m shall be used as the stay anchor.

**5.1.15 Conductor**

Phase conductor to be used shall be Aluminium Conductor Steel Reinforced (ACSR) or All Aluminium Alloy Conductors (AAAC) and shall consist of steel strands together with aluminium strands or aluminium strands only.

The outermost layers of the conductors shall be stranded with right hand lay. There shall be no joints in the individual wires of the outer layers of the aluminium wire. The requirements for the conductors are specified in the attached Specification for Aluminium Alloy Conductors and Specification for Aluminium Conductor Steel Reinforced.

**5.1.15.1 Conductor Characteristics**

The conductors shall conform to the following:

**16.a PHYSICAL CHARACTERISTICS**

| Nominal Al. area (mm <sup>2</sup> ) | Code Name | Steel No./mm <sup>2</sup> | Alum. No/mm <sup>2</sup> | Over all dia. (mm) | Calculated Al. equ. Area (mm <sup>2</sup> ) | Total cond. Area (mm <sup>2</sup> ) | Weight Kg/Km | Copper Equiv. Area (sq.in) |
|-------------------------------------|-----------|---------------------------|--------------------------|--------------------|---|-------------------------------------|--------------|----------------------------|
| 150                                 | Wolf      | 7/2.59                    | 30/2.59                  | 18.1               | 154.3                                       | 195.0                               | 727          | 0.15                       |
| 300AAA                              | Upas      |                           | 37/3.53                  | 24.71              |   | 362.1                               | 997          | 0.3                        |

**16.b ELECTRICAL CHARACTERISTICS**

| Nominal Al. area (mm <sup>2</sup> ) | Tensile Strength kgs | Resistance at 20 °C Ohm/Km | Current Rating Amp | Inductive reactance ohm/Km Spacing |       |
|-------------------------------------|----------------------|----------------------------|--------------------|------------------------------------|-------|
|                                     |                      |                            |                    | 30cm                               | 50cm  |
| 150                                 | 6880                 | 0.1844                     | 430                | 0.235                              | 0.266 |
| 300                                 | 10600                | 0.09155                    | 610                |                                    |       |

The current ratings are based on the following operating conditions:

Ambient temperature : 35°C  
Maximum conductor temperature : 75°C  
Intensity of solar radiation : 0.089 w/cm<sup>2</sup>

#### 5.1.15.2 Joints, Clamps and Connectors

Conductor fittings shall be designed in accordance with BS.3288. The electrical conductivity and current capacity of each joint or clamp shall be not less than those of the equivalent length of conductor.

Dead end clamps and tension joints shall be of the wedge clamp type and shall be so as not to permit slipping of or cause damage to or failure of the complete conductor at a load less than 85 per cent of the ultimate strength of the conductor. (Refer to the safety factors: 3.0 for conductors, 2.5 for clamps/fittings))

The design of joints and any tools to be used in their assembly shall be such as to reduce to a minimum the possibility of faulty assembly. All external nuts shall be locked in an approved manner. There shall be no relative movement within the clamp between individual layers of the conductor itself.

Mid span joints shall comply with the mechanical requirements of the Specification for line conductor joints and clamps. Compression dies shall be of a common size and dimensions for each fitting for a given size of conductor. Not more than one mid span joint will be allowed in one span in one conductor.

Parallel Groove (PG) clamp can be applied to joint conductors where there is no mechanical load.

##### 5.1.15.2.1 Conductor Termination's.

Ball ended hook, Socket clevis and Socket tongue shall be suitable for use on Aluminium conductor steel-reinforced (ACSR) of outer diameter between 7.00 mm and 18.2 mm (25 sq. mm and 150 sq. mm) and standard disc insulator of ball and socket type with the ball pin diameter of 16 mm.

Ball ended hook, socket clevis and socket tongue shall be of malleable iron or ductile iron, hot dip galvanised to BS 729.

Tension clamp shall be bolted type and shall be suitable for use on aluminium conductor steel-reinforced (ACRS) of outer diameter between 7.00 mm and 18.2 mm (25 sq. mm and 150 sq. mm).

The clamp body and keeper piece shall be of high strength and heat treated cast aluminium alloy.

The clamp cotter bolts, and U-bolts shall be galvanised steel and the pin shall be stainless steel.

The clamp shall have slip strength of not less than 85% of the rated ultimate strength of conductor it is intended for use with.

##### 5.1.15.2.2 Joints (Non-tension)

Parallel groove clamp (PG Clamp) shall be suitable for use on aluminium conductor steel-reinforced and all aluminium conductors of outer diameter in the range of 7.00 mm to 18.2 mm for ACSR conductors and 9.0 mm to 13.2 mm for AAC conductors (25 sq. mm and 150 sq. mm).

- (a) The groove of the PG clamp shall correctly fit the conductor it is intended for use with. It shall have adequate cross sectional area and length.
- (b) The PG clamp shall be of electrolytic, high strength, corrosion resistant aluminium alloy.

#### **5.1.15.2.3 Suspension Clamps**

Suspension clamps shall be suitable for use on aluminium conductor steel-reinforced (ACSR) of up to 18.2 mm diameter (150 sq. mm) and shall be of the following types.

- (a) Clevis ended hook type and pivoted type (similarly known as envelope type and trunnion type respectively).
  - (i) The clamp body and keeper piece shall be of high strength, heat-treated cast aluminium alloy.
  - (ii) The clamp cotter bolts, hangers, brackets and U-bolts shall be of galvanised steel and the cotter pin shall be of stainless steel.
- (b) Angle suspension clamp type (similarly known as side opening type).
  - (i) The clamp shall be suitable for use on turning angles from 10 to 120 degrees.
  - (ii) The clamp body and keeper shall be of malleable iron or ductile iron, hot dip galvanised to BS 729.
  - (iii) The clamp cotter bolts and bolt shall be galvanised steel and the cotter pin shall be stainless steel.

#### **5.1.15.2.4 Connectors**

The connectors shall be suitable for use on stranded bare conductors and shall correctly fit the conductor it is intended for use.

The connector shall have adequate cross sectional area and dimensions and shall have current carrying capacity at least equal to the capacity of the conductor it is intended for.

- (a) Aluminium connectors
  - (iv) Aluminium connectors (line taps) shall be suitable for connecting stranded aluminium conductors
  - (v) The connector shall be manufactured from electrolytic, high strength aluminium.
- (b) Copper connectors

Copper connectors shall be suitable for connecting stranded copper conductors.
- (c) Bi-metal connectors
  - (vi) Bi-metal connectors shall be suitable for connecting stranded aluminium conductors to stranded copper conductors.
  - (vii) The bi-metal connector shall be designed to provide an effective corrosion barrier between the dissimilar metals (aluminium and copper).

#### 5.1.15.3 **Drums**

Drums for conductors shall be stoutly constructed of good quality timber or steel and clearly marked with length and type of conductor in a manner not easily removable. Drums shall be securely battened around the perimeter and shall be lined with approved impervious material to prevent contact between the contents and both the drum itself and any chemicals with which the drum has been treated.

All timber drums and battens shall be protected from deterioration on site by termite or fungus attack by an approved impregnation treatment at the works before dispatch. Such substance shall not be harmful to the conductor.

All drums shall have spindle holes of adequate diameter and be stoutly reinforced with steel plate.

The cut ends of the conductor shall be properly secured to the flange of the drum and shall be treated in an approved manner to prevent the ingress of moisture during transit or storage.

The Contractor shall deliver all empty drums to the employer's store. All drums are non returnable and shall remain the property of the Employer.

#### 5.1.15.4 **Markings of Drums**

The following particulars will be indelibly stencilled on both flanges of every drum:

- (ii) Contract title and reference number
- (iii) Manufacturer's name
- (iv) Direction of rolling
- (v) Lifting instructions and limitations

An aluminium nameplate shall be fixed to each drum clearly showing the following:-

- (A) Conductor materials and stranding
- (B) Length of conductor
- (C) Net weight
- (D) Gross weight
- (E) Manufacturers batch number
- (F) Manufacturers drum number
- (G) Winding date
- (H) Approximate measurements

#### 5.1.15.4.1 **Conductor Stringing**

All stringing equipment shall be properly anchored and shall be positioned in such a way that structures, insulators and fittings will not be overloaded.

Every precaution is to be taken to prevent damage to the conductor. Clamps and other devices used for handling the conductor during stringing shall allow no slippage or relative movement of strands or layers and shall not pinch or deform the conductor. Conductor grooves in sheaves and tensioner shall be lined with neoprene or rubber.

Conductors shall be effectively earthed in an approved manner during running out and at all places where men are working on them.



Conductor drums shall be closely examined before conductor pulling commences and all nails and other things that could damage the conductor shall be removed.

#### 5.1.15.5 **Reconductoring**

Before the re-conductoring commence, the Contractor shall inspect the line and check that the clearances to ground, trees, houses, roads etc meet the requirements. He shall also check that :

- The capacity of poles, cross arms and stay wires is sufficient for the new conductor
- The quality of poles, cross arms and stay wires is satisfactory
- The pole heights are sufficient for the new conductor
- The poles are in vertical position

Where the existing installation not meet the above requirements, change out of material or aligning work of poles have to be carried out.

When re-conductoring, the Contractor has to handle all tilted poles with outmost care. Before loosen the existing conductors, the poles have to be secured with stay wires. Climbing the poles has to be done by use of ladders placed against the tilted direction.

All tilted poles has to be corrected to a vertical position before the stringing work of the new conductors starts. Poles that do not meet capacity- or quality-wise meet the new requirements have to be changed out.

After aligning the poles, the top of the pole shall not be out of the vertical axis by more than the top pole diameter.

All clamps, fittings and details not suiting the new conductors or quality-wise not meet the requirements, shall be changed out.

#### 5.1.16 **Safety**

Personnel shall be required to use necessary protective gear, which conform to applicable codes.

Personnel working near high voltage areas shall be required to use non-slip foot wear, gloves, safety glasses, helmets, etc. They shall also be required to observe stipulated safety clearances.

Fire prevention and safety programmes shall also be observed.

#### 5.1.17 **Operation Devices and Protection Systems**

Operation devices consisting of single and three pole disconnectors shall be installed at locations specified by the designer. The disconnectors shall be easily accessible during normal conditions. They will be fixed in such a way that they cannot be closed by the action of gravity. Their characteristics shall be capable of meeting the maximum rated current of the circuit.

#### 5.1.17.1 **Isolation**

##### **5.1.17.1.1 Air break Switches**

Air break switches shall be used to interrupt small currents (up to 10% of rating of ABS).

##### **5.1.17.1.2 Protection Against Overvoltages**

Protection against overvoltage will consist of surge diverters at locations specified by the designer.

##### **5.1.17.1.3 Protection Against Overcurrent**

The network comprises main line and spurs.

Circuit breakers shall be installed at the beginning of the main line at the primary substation.

Short circuit fuses shall be installed at the beginning of the primary spur.

Autoreclosers and sectionalizer shall be located as specified by the designer.

**SECTION - VI**  
**FORMS AND PROCEDURES**

## Forms and Procedures

|  |    |
|--|----|
| ANNEX 1. REQUEST FOR CHANGE PROPOSAL .....     | 6  |
| ANNEX 2. ESTIMATE FOR CHANGE PROPOSAL.....     | 8  |
| ANNEX 3. ACCEPTANCE OF ESTIMATE .....          | 10 |
| ANNEX 4. CHANGE PROPOSAL .....                 | 11 |
| ANNEX 5. CHANGE ORDER.....                     | 14 |
| ANNEX 6. PENDING AGREEMENT CHANGE ORDER.....   | 15 |
| ANNEX 7. APPLICATION FOR CHANGE PROPOSAL ..... | 17 |

## Form of Completion Certificate

Date: \_\_\_\_\_  
Loan/Credit N<sup>o</sup>: \_\_\_\_\_  
IFB N<sup>o</sup>: \_\_\_\_\_

\_\_\_\_\_  
To: \_\_\_\_\_

Dear Ladies and/or Gentlemen,

Pursuant to GC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between yourselves and the Employer dated \_\_\_\_\_, relating to the \_\_\_\_\_, we hereby notify you that the following part(s) of the Facilities was (were) complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said part(s) of the Facilities, together with the responsibility for care and custody and the risk of loss thereof on the date mentioned below.

1. Description of the Facilities or part thereof: \_\_\_\_\_
2. Date of Completion: \_\_\_\_\_

However, you are required to complete the outstanding items listed in the attachment hereto as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

Very truly yours,

\_\_\_\_\_  
Title  
(Project Manager)

## Form of Operational Acceptance Certificate

Date: \_\_\_\_\_  
Loan/Credit N<sup>o</sup>: \_\_\_\_\_  
IFB N<sup>o</sup>: \_\_\_\_\_

\_\_\_\_\_  
To: \_\_\_\_\_

Dear Ladies and/or Gentlemen,

Pursuant to GC Sub-Clause 25.3 (Operational Acceptance) of the General Conditions of the Contract entered into between yourselves and the Employer dated \_\_\_\_\_, relating to the \_\_\_\_\_, we hereby notify you that the Functional Guarantees of the following part(s) of the Facilities were satisfactorily attained on the date specified below.

1. Description of the Facilities or part thereof: \_\_\_\_\_
2. Date of Operational Acceptance: \_\_\_\_\_

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

Very truly yours,

\_\_\_\_\_  
Title  
(Project Manager)

## Change Order Procedure and Forms

Date: —  
Loan/Credit N<sup>o</sup>: —  
IFB N<sup>o</sup>: —

### CONTENTS

1. General
2. Change Order Log
3. References for Changes

### ANNEXES

- Annex 1 Request for Change Proposal
- Annex 2 Estimate for Change Proposal
- Annex 3 Acceptance of Estimate
- Annex 4 Change Proposal
- Annex 5 Change Order
- Annex 6 Pending Agreement Change Order
- Annex 7 Application for Change Proposal

## **Change Order Procedure**

### **1. General**

This section provides samples of procedures and forms for implementing changes in the Facilities during the performance of the Contract in accordance with GC Clause 39 (Change in the Facilities) of the General Conditions.

### **2. Change Order Log**

The Contractor shall keep an up-to-date Change Order Log to show the current status of Requests for Change and Changes authorized or pending, as Annex 8. Entries of the Changes in the Change Order Log shall be made to ensure that the log is up-to-date. The Contractor shall attach a copy of the current Change Order Log in the monthly progress report to be submitted to the Employer.

### **3. References for Changes**

- (1) Request for Change as referred to in GC Clause 39 shall be serially numbered CR-X-nnn.
- (2) Estimate for Change Proposal as referred to in GC Clause 39 shall be serially numbered CN-X-nnn.
- (3) Acceptance of Estimate as referred to in GC Clause 39 shall be serially numbered CA-X-nnn.
- (4) Change Proposal as referred to in GC Clause 39 shall be serially numbered CP-X-nnn.
- (5) Change Order as referred to in GC Clause 39 shall be serially numbered CO-X-nnn.

Note: (a) Requests for Change issued from the Employer's Home Office and the Site representatives of the Employer shall have the following respective references:

|             |          |
|-------------|----------|
| Home Office | CR-H-nnn |
| Site        | CR-S-nnn |

- (b) The above number "nnn" is the same for Request for Change, Estimate for Change Proposal, Acceptance of Estimate, Change Proposal and Change Order.



---

### Annex 1. Request for Change Proposal

(Employer's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

With reference to the captioned Contract, you are requested to prepare and submit a Change Proposal for the Change noted below in accordance with the following instructions within \_\_\_\_\_ days of the date of this letter \_\_\_\_\_.

1. Title of Change: \_\_\_\_\_

2. Change Request No. \_\_\_\_\_

3. Originator of Change: Employer: \_\_\_\_\_  
Contractor (by Application for Change Proposal No. \_\_\_\_\_<sup>1</sup>:

4. Brief Description of Change: \_\_\_\_\_

5. Facilities and/or Item No. of equipment related to the requested Change: \_\_\_\_\_

6. Reference drawings and/or technical documents for the request of Change:

Drawing No./Document No.

Description

7. Detailed conditions or special requirements on the requested Change: \_\_\_\_\_

8. General Terms and Conditions:

(a) Please submit your estimate to us showing what effect the requested Change will have on the Contract Price.

(b) Your estimate shall include your claim for the additional time, if any, for completion of the requested Change.

(c) If you have any opinion negative to the adoption of the requested Change in connection with the conformability to the other provisions of the Contract or the safety of the Plant or Facilities, please inform us of your opinion in your proposal of revised provisions.

(d) Any increase or decrease in the work of the Contractor relating to the services of its personnel shall be calculated.

\_\_\_\_\_

(e) You shall not proceed with the execution of the work for the requested Change until we have accepted and confirmed the amount and nature in writing.

\_\_\_\_\_  
(Employer's Name)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Name of signatory)

\_\_\_\_\_  
(Title of signatory)

**Annex 2. Estimate for Change Proposal**

(Contractor's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

With reference to your Request for Change Proposal, we are pleased to notify you of the approximate cost of preparing the below-referenced Change Proposal in accordance with GC Sub-Clause 39.2.1 of the General Conditions. We acknowledge that your agreement to the cost of preparing the Change Proposal, in accordance with GC Sub-Clause 39.2.2, is required before estimating the cost for change work.

1. Title of Change: \_\_\_\_\_

2. Change Request No./Rev.: \_\_\_\_\_

3. Brief Description of Change: \_\_\_\_\_

4. Scheduled Impact of Change: \_\_\_\_\_

5. Cost for Preparation of Change Proposal: \_\_\_\_\_<sup>2</sup>

(a) Engineering (Amount)

(i) Engineer \_\_\_\_\_ hrs x \_\_\_\_\_ rate/hr = \_\_\_\_\_

(ii) Draftsperson \_\_\_\_\_ hrs x \_\_\_\_\_ rate/hr = \_\_\_\_\_

Sub-total \_\_\_\_\_ hrs \_\_\_\_\_

Total Engineering Cost \_\_\_\_\_

(b) Other Cost \_\_\_\_\_

Total Cost (a) + (b) \_\_\_\_\_

\_\_\_\_\_  
(Contractor's Name)

\_\_\_\_\_  
(Signature)

<sup>2</sup> Costs shall be in the currencies of the Contract.

\_\_\_\_\_  
(Name of signatory)

\_\_\_\_\_  
(Title of signatory)

**Annex 3. Acceptance of Estimate**

(Employer's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

We hereby accept your Estimate for Change Proposal and agree that you should proceed with the preparation of the Change Proposal.

1. Title of Change: \_\_\_\_\_
2. Change Request No./Rev.: \_\_\_\_\_
3. Estimate for Change Proposal No./Rev.: \_\_\_\_\_
4. Acceptance of Estimate No./Rev.: \_\_\_\_\_
5. Brief Description of Change: \_\_\_\_\_
6. Other Terms and Conditions: In the event that we decide not to order the Change accepted, you shall be entitled to compensation for the cost of preparation of Change Proposal described in your Estimate for Change Proposal mentioned in para. 3 above in accordance with GC Clause 39 of the General Conditions.

\_\_\_\_\_  
(Employer's Name)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Name and Title of signatory)

**Annex 4. Change Proposal**

(Contractor's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

In response to your Request for Change Proposal No. \_\_\_\_\_, we hereby submit our proposal as follows:

1. Title of Change: \_\_\_\_\_
2. Change Proposal No./Rev.: \_\_\_\_\_
3. Originator of Change: Employer: [ \_\_\_\_\_  
Contractor: \_\_\_\_\_
4. Brief Description of Change: \_\_\_\_\_
5. Reasons for Change: \_\_\_\_\_
6. Facilities and/or Item No. of Equipment related to the requested Change:  
\_\_\_\_\_
7. Reference drawings and/or technical documents for the requested Change:

Drawing/Document No.

Description

8. Estimate of increase/decrease to the Contract Price resulting from Change Proposal:<sup>3</sup>

(Amount)

- |     |                                      |       |
|-----|--------------------------------------|-------|
| (a) | Direct material                      | _____ |
| (b) | Major construction equipment         | _____ |
| (c) | Direct field labor (Total _____ hrs) | _____ |
| (d) | Subcontracts                         | _____ |
| (e) | Indirect material and labor          | _____ |
| (f) | Site supervision                     | _____ |
| (g) | Head office technical staff salaries | _____ |

<sup>3</sup> Costs shall be in the currencies of the Contract.

|                    |                           |       |
|--------------------|---------------------------|-------|
| Process engineer   | _____ hrs @ _____ rate/hr | _____ |
| Project engineer   | _____ hrs @ _____ rate/hr | _____ |
| Equipment engineer | _____ hrs @ _____ rate/hr | _____ |
| Procurement        | _____ hrs @ _____ rate/hr | _____ |
| Draftsperson       | _____ hrs @ _____ rate/hr | _____ |
| Total              | _____ hrs                 | _____ |

(h) Extraordinary costs (computer, travel, etc.) \_\_\_\_\_

(i) Fee for general administration, \_\_\_\_\_ % of Items \_\_\_\_\_

(j) Taxes and customs duties \_\_\_\_\_

Total lump sum cost of Change Proposal \_\_\_\_\_  
(Sum of items (a) to (j))

Cost to prepare Estimate for Change Proposal \_\_\_\_\_  
(Amount payable if Change is not accepted)

9. Additional time for Completion required due to Change Proposal

10. Effect on the Functional Guarantees

11. Effect on the other terms and conditions of the Contract

12. Validity of this Proposal: within [Number] days after receipt of this Proposal by the Employer

13. Other terms and conditions of this Change Proposal:

(a) You are requested to notify us of your acceptance, comments or rejection of this detailed Change Proposal within \_\_\_\_\_ days from your receipt of this Proposal.

(b) The amount of any increase and/or decrease shall be taken into account in the adjustment of the Contract Price.

(c) Contractor's cost for preparation of this Change Proposal:<sup>2</sup>

\_\_\_\_\_  
(Contractor's Name)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Name of signatory)

<sup>2</sup> Specify where necessary.

\_\_\_\_\_  
(Title of signatory)



**Annex 5. Change Order**

(Employer's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

We approve the Change Order for the work specified in the Change Proposal (No. \_\_\_\_\_), and agree to adjust the Contract Price, Time for Completion and/or other conditions of the Contract in accordance with GC Clause 39 of the General Conditions.

1. Title of Change: \_\_\_\_\_

2. Change Request No./Rev.: \_\_\_\_\_

3. Change Order No./Rev.: \_\_\_\_\_

4. Originator of Change: Employer: \_\_\_\_\_  
Contractor: \_\_\_\_\_

5. Authorized Price:

Ref. No.: \_\_\_\_\_ Date: \_\_\_\_\_

Foreign currency portion \_\_\_\_\_ plus Local currency portion \_\_\_\_\_

6. Adjustment of Time for Completion

None Increase \_\_\_\_\_ days Decrease \_\_\_\_\_ days

7. Other effects, if any

Authorized by: \_\_\_\_\_  
(Employer)

Date: \_\_\_\_\_

Accepted by: \_\_\_\_\_  
(Contractor)

Date: \_\_\_\_\_

### Annex 6. Pending Agreement Change Order

(Employer's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: [ \_\_\_\_\_

Dear Ladies and/or Gentlemen:

We instruct you to carry out the work in the Change Order detailed below in accordance with GC Clause 39 of the General Conditions.

1. Title of Change: \_\_\_\_\_
2. Employer's Request for Change Proposal No./Rev.: \_\_\_\_\_  
dated: \_\_\_\_\_
3. Contractor's Change Proposal No./Rev.: \_\_\_\_\_ dated:  
\_\_\_\_\_
4. Brief Description of Change: \_\_\_\_\_
5. Facilities and/or Item No. of equipment related to the requested Change:  
\_\_\_\_\_
6. Reference Drawings and/or technical documents for the requested Change:

Drawing/Document No.

Description

7. Adjustment of Time for Completion:
8. Other change in the Contract terms:
9. Other terms and conditions:

\_\_\_\_\_  
(Employer's Name)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Name of signatory)

\_\_\_\_\_  
(Title of signatory)

**Annex 7. Application for Change Proposal**

(Contractor's Letterhead)

To: \_\_\_\_\_

Date: \_\_\_\_\_

Attention: \_\_\_\_\_

Contract Name: \_\_\_\_\_

Contract Number: \_\_\_\_\_

Dear Ladies and/or Gentlemen:

We hereby propose that the below-mentioned work be treated as a Change in the Facilities.

1. Title of Change: \_\_\_\_\_
2. Application for Change Proposal No./Rev.: \_\_\_\_\_ dated:  
\_\_\_\_\_
3. Brief Description of Change: \_\_\_\_\_
4. Reasons for Change:
5. Order of Magnitude Estimation (in the currencies of the Contract):
6. Scheduled Impact of Change:
7. Effect on Functional Guarantees, if any:
8. Appendix:

\_\_\_\_\_  
(Contractor's Name)

\_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Name of signatory)

\_\_\_\_\_  
(Title of signatory)