

TABLE OF CONTENTS

0.1 Circulation List

0.2 Amendment Record

FOREWORD

1. SCOPE
2. REFERENCES
3. TERMS AND DEFINITIONS
4. REQUIREMENTS
5. TESTS AND INSPECTION
6. MARKING, LABELLING AND PACKING
7. DOCUMENTATION

ANNEX A: SCHEDULE OF GUARANTEED TECHNICAL PARTICULARS FOR OFFERED TRANSFORMER *(to be filled and signed by the Manufacturer and submitted together with relevant copies of the Manufacturer's catalogues, brochures, drawings, technical data & calculations, sales records for past five years, four customer reference letters, details of manufacturing capacity, the manufacturer's experience, copies of complete type test reports and accreditation certificate to ISO/IEC 17025 for the testing laboratory for tender evaluation, all in English Language)*

ANNEX B: DRAWINGS

ANNEX C: SUB CONTRACTORS LIST

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31



TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 2 of 62

0.1 Circulation List

COPY NO.	COPY HOLDER
1	Standards Manager
Electronic copy (pdf) on KPLC server currently: http://172.16.1.40/dms/browse.php?fFolderId=23	

0.2 Amendment Record

Rev No.	Date (YYYY-MM-DD)	Description of Change	Prepared by (Name & Signature)	Approved by (Name & Signature)
Issue 5 Rev 1	2015-07-31	-Cancels & replaces Issue 5, revision 0	M. Apudo N. Mungai Eng. S. Nguli Eng. S. Kimitei J. Kinda S. Macharia G. Welimo F. Omondi B. King'esi G. Korir H. Njenga Z Oluoch J. Kasimu	Dr. Eng. Peter Kimemia

Issued by: Head of Section, Standard development

Authorized by: Head of Department, Standards

Signed:

Signed:

Date: 2015-07-31

Date: 2015-07-31

The following standards contain provisions which, through reference in this text constitute provisions of this specification. Unless otherwise stated, the latest editions (including amendments) apply.

ISO 1461: Hot dip galvanized coatings on fabricated iron and steel articles – Specifications and test methods.

IEC 60076- 1, 2, 3, 4, 5, 7&10: Power transformers – Part 1: General; -Part 2: Temperature rise; - Part 3: Insulation levels dielectric tests and external air clearances; - Part 4: Guide to the lightning impulse testing-power transformers and reactors; - Part 5: Ability to withstand short circuit;-Part 7: Loading guide for oil immersed power transformers - Part 10: Determination of sound levels.

IEC 60554-3-1: Specification for cellulosic paper for electrical purposes- Part 3: Specification for individual materials, sheet 1- General purpose electrical paper.

IEC 60317-0-1: Specifications for particular types of winding wires – Part 0: General requirements –Section 1: Enameled round copper wire

IEC 60296: Specification for unused mineral insulating oil for transformers and switchgear.

IEC 60214: Tap-changers - Part 1: Performance requirements and test methods, Part 2: Application guide

IEC 60512: Connectors for electronic equipment

IEC 60641-3-1: Pressboard and press paper for electrical purposes –Part 3: Specifications for individual materials – Sheet 1: Requirements for pressboard, types B.0.1, B.0.3, B.2.1, B.2.3, B.3.1, B.3.3, B.4.1, B.4.3, B.5.1, B.5.3 and B.6.1

IEC 60422: Mineral insulating oils in electrical equipment – Supervision and maintenance guidance

IEC 60071: Insulation Co-ordination: Part 1 definitions, principles and rules

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

FOREWORD

This specification has been prepared by the Standard Department in collaboration with Network Management and Regional Coordination divisions, all of The Kenya Power & Lighting Company Ltd (abbreviated as KPLC) and it lays down requirements for pole mounted three phase oil type distribution transformers. The specification is intended for use by KPLC in purchasing the transformers.

It is expected that manufacturers will provide energy efficient standard design transformers that will provide high level of efficiency and significant initial cost saving. The manufacturer shall also submit information which demonstrates satisfactory service experience with products which fall within the scope of this specification.

1. SCOPE

- 1.1. This specification is for newly manufactured oil-immersed, air-cooled, outdoor type pole mounted three phase distribution transformers for 11kV and 33kV distribution systems operated at 50 Hz.

The specification covers transformers of the following voltage ratios and ratings:

- **11000/420V: 50 KVA, 100 KVA, 200 KVA and 315 KVA**
- **33000/420V: 50 KVA, 100 KVA, 200 KVA and 315 KVA.**

- 1.2. The specification also covers inspection, test of the transformer and schedule of Guaranteed Technical Particulars as well as schedule of materials to be filled, signed by the manufacturer and submitted for tender evaluation.
- 1.3. The specification stipulates the minimum requirements (including features to deter vandalism) for pole mounted three phase distribution transformers acceptable for use in the company (KPLC) and it shall be the responsibility of supplier to ensure adequacy of the design, good workmanship, good engineering practice and adherence to standards, specifications and applicable regulations in the manufacture of the transformers for KPLC
- 1.4. The specification does not purport to include all the necessary provisions of a contract.

2. REFERENCES

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

- IEC 60071: Insulation Co-ordination: Part 1 definitions, principles and rules
- BS 381C: Specification for colors for identification coding and special purposes
- BS EN 50464-1: Three phase oil immersed distribution transformers 50 HZ from 50 KVA to 2500 KVA with highest voltage for equipment not exceeding 36 KV – Part 1: General requirements
- BS 2627: Specification for wrought aluminum for electrical purposes.
- BS EN 755-6: Aluminum and aluminum alloys. Extruded rod/bar, tube and profiles. Hexagonal bars, tolerances on dimensions and form

Department of Energy 10 CFR Part 431: Energy Conservation Program for Commercial Equipment: Distribution Transformers Energy Conservation Standards Rule.

Manual on Transformers – Publication No. 295 CBIP 2006

3. TERMS AND DEFINITIONS

The terms and definitions given in the reference standards shall apply.

4. REQUIREMENTS

4.1. Service Conditions

4.1.1. Operating conditions

The transformer shall be suitable for continuous outdoor operation in tropical areas with the following conditions.

- a) Altitude: up to 2,200m above sea level;
- b) Temperature: average of +30°C with a minimum of -1°C and max +40 °C;
- c) Humidity: up to 95%;
- d) Pollution: Design pollution level to be taken as "Heavy" (Pollution level III) for inland and "Very Heavy" (Pollution level IV) for coastal applications in accordance with IEC 60815.
- e) Isokeraunic level: 180 thunderstorm days per year

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

4.1.2. System characteristics

4.1.2.1. The transformer will be connected to overhead system which is of unearthed construction (i.e. without continuous aerial earth wire).

4.1.2.2. The primary system has a nominal voltage of 11000 volts and 33000 volts and system highest voltage of 12000 volts and 36000 volts respectively. The primary system is three phase 3-wire 50 Hz and the secondary is 420 volts three phase 4-wire. The target three phase voltage at the consumer terminals is 400V±6% at 50Hz.

4.1.2.3. The Transformer shall be operated at a high loading factor. Loading shall be as per IEC 60076.

4.2. General Requirements

4.2.1. The transformers shall be outdoor oil-immersed, of ONAN classification and core type windings designed, manufactured and tested in accordance with IEC 60076-1:2011 and all the all relevant parts (latest editions). Any deviations/additional requirements shall be as stated in this specification.

4.2.2. The transformer shall be designed for service (functional) life of at least twenty five (25) years in in line with the minimum insulation life of 180,000h (20.55 years) as per IEC 60076-7 Table 3.

4.2.3. The transformer shall be a two winding type three-phase integral unit with connections and phase displacements symbols clearly marked on the nameplate i.e. D for high voltage and y & n for low voltage.

4.2.4. The transformer shall be hermetically sealed type each with bolted top cover. The hermetically sealed type shall have all active parts including tap-changer contacts and MV lead-outs completely submerged in oil and a pressure relief valve located on the LV side with the height not extending beyond MV bushing. The design shall allow for oil expansions under normal and fault conditions as per service conditions in clause 4.1.

NOTE: *The expansion of the liquid shall be taken by elastic movement of the permanently sealed corrugated tank or radiators.*

4.2.5. The transformer and its component parts shall be able to carry loading beyond rated power under permissible loading given by IEC 60076-7, Table 4 and clause 4.3.2 for distribution

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

transformers. The bushings, tap changers and other auxiliary equipment shall be selected so as not to restrict the loading capability of the transformer.

4.2.6. The transformer shall be designed to minimize the risk or accidental short-circuit caused by animals, birds or vermin. The manufacturer shall consider the safety of operators and maintenance staff in the design of the transformer in particular the following aspects:

- (i) Accessibility to parts with high temperatures;
- (ii) Accessibility to live parts;
- (iii) Lifting and handling provisions
- (iv) Access for maintenance
- (v) Working at a height

4.2.7. All parts of the transformer, including bushings insulators with their mountings, shall be designed to eliminate pockets of water. Rain water shall not collect anywhere on the top cover; the gaskets shall be concealed by an overlap between the top cover and tank flanges by 10mm width.

4.2.8. Corresponding parts liable to be replaced shall be interchangeable.

4.2.9. The design of fittings and accessories shall not allow for siphoning of oil by vandals. All fittings and accessories shall be secured from the inside of the transformer and/or have openings that do not allow for oil siphoning.

4.2.10. All components and materials used in the construction of the transformer shall comply with the requirements of the relevant IEC/ISO standards where they exist unless otherwise stated. Type test reports from ISO/IEC 17025 accredited laboratories for these component parts and materials from respective manufacturers shall be submitted for tender evaluation to verify conformity to their respective manufacturing standards.

4.2.11. All current carrying surfaces - connections and contacts shall provide adequate cross-sectional area suitable for continuous current carrying capacity without undue heating. Fixed connections shall be secured by bolts & nuts or set screws to ISO 898 of adequate sizes, securely tightened. Lock nuts shall be used on stud connections carrying current. All leads from the winding to the terminals of the bushings shall be adequately supported to prevent damages caused by vibrations including a systematical pull under short circuit conditions. All bolts and nuts in current carrying parts shall be made of brass with at least 70% copper content.

4.2.12. The choice of materials and processes used in the manufacture of the transformer shall be compatible with the insulating oil and avoid development of acidity in the insulating oil.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

4.2.13. The maximum sound levels shall be in accordance with BS EN 50464-1 and Table 5. The sound level shall be measured and tested in accordance with IEC 60076-10 or NEMA - TR1 and shall not exceed the guaranteed maximum level (without tolerance). The guaranteed values shall be stated in the bid for tender evaluation.

4.2.14. The transformer shall be designed to withstand a constant acceleration of at least 1g in all directions (in addition to the acceleration due to gravity in the vertical directions) without any damage, demonstrated by static force calculations based on a constant value of acceleration.

4.2.15. Each transformer shall be suitable for pole mounting on a steel channels. It shall be complete with two steel channels under base with suitable mounting holes.

4.2.16. Drawings and documentation for each size of transformer offered shall be submitted with the tender clearly detailing important dimensions, any special features of the offered design, clearances, accessories, fittings and the features of the offered design that make it impossible for vandals to siphon oil from the transformer even after forceful breakage of the accessory/fitting.

4.2.17. Design drawings (by the manufacturer) complete with manufacturer's guaranteed technical particulars (GTP) shall be submitted to KPLC for approval before manufacture. The design drawings shall be detailed and shall include the following:

- a) Overall dimensions of the transformer and relevant electrical clearances. This shall include all perspectives and respective:
 - (i) Weight of oil,
 - (ii) Weight of LV winding conductor
 - (iii) Weight of LV winding conductor
 - (iv) Core material,
 - (v) Copper/aluminium winding material,
 - (vi) Insulating materials and
 - (vii) Steel tank/core clamp structure.
- b) Core/coil/insulation dimensions, clearances (internal and external) and stacking/coil winding sequence detail.
- c) Drawing of nameplate to scale.
- d) Dimensional drawing of bushings, tap-changer and clamps.
- e) Legend for all technical engineering drawings with manufacturer name, logo, model number, revision/drawing number and key
- f) Detailed drawing of surge arrestor mounting and constituent parts.
- g) Detailed drawing of arcing horns where applicable.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

- h) All design drawings MUST BE stamped and signed by the manufacturer's authorised personnel.

4.2. Ratings

- 4.2.1. The transformers shall be of the following ratings:

- (a) 11000/420V: 50 KVA, 100 KVA, 200 KVA and 315 KVA
- (b) 33000/420V: 50 KVA, 100 KVA, 200 KVA and 315 KVA.

- 4.2.2. The transformer shall be capable of carrying its full normal rating continuously at any tap under the conditions stated in clause 4.1 without :
- (i) Undue stress,
 - (ii) Overheating, or
 - (iii) Temperature rise exceeding 50°C in top oil or 55°C in windings above ambient
 - (iv) Temperature rise of winding hot spot and of metallic part in contact with cellulose outside the winding block shall not exceed 65°C, above ambient, as per IEEE.

NOTE: The loading capabilities shall be demonstrated by a temperature rise test. This test shall be done in the presence of Kenya Power representatives during factory acceptance testing.

- 4.2.3. The transformer shall be capable of withstanding the maximum fault level at its rated voltage and impedance for two (2) seconds. The design should cater for the expected lifetime of the transformer. As a minimum, the short-circuit apparent power of 11kV and 33kV systems shall be taken as 500MVA and 1000MVA respectively (as per IEC 60076-5) in order to obtain the value of the symmetrical short circuit current to be used for the design and tests.
- 4.2.4. The thermal ability of the offered transformer design to withstand short circuit shall be demonstrated by calculation carried out in accordance with the requirements of clause 4.1.1 to 4.1.5 of IEC 60076-5.
- 4.2.5. The calculation showing details and compliance with the requirements of clause 4.1.1 to 4.1.5 of IEC 60076-5 shall be submitted with tender for purposes of tender evaluation. The duration of the current to be used for the calculation of the thermal ability to withstand short circuit shall be two (2) seconds as per IEC 60076-5.
- 4.2.6. The ability of the transformer to withstand the dynamic effects of short circuit shall be demonstrated by tests and complete test reports (including oscillograms and records of

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

the condition of the transformer before and after the short-circuit test) shall be submitted with the bid for tender evaluation.

4.3. Winding, Insulation and Connections

4.3.1. General

4.3.1.1. The transformer vector group shall be Dyn11 with respect to the 11kV windings (or 33kV as appropriate) and low voltage winding (420V) as per IEC 60076. The star point of the low voltage winding shall be brought out to a neutral bushing of the same size as the LV phase bushing and rod.

4.3.1.2. The transformer shall be capable of operation without danger on any particular tapping at the rated KVA when the voltage may vary by + 20% and -5% of the voltage corresponding to the tapping.

4.3.1.3. The windings and connections as well as the insulating material shall not soften, ooze, shrink or collapse during service. The materials shall be non-catalytic and chemically inactive in transformer oil during service.

4.3.2. Winding material

4.3.2.1. The primary windings shall be made of Grade 3, enameled round copper wire as per IEC 60317-0-1 or shaped aluminum coil conforming to BS 2627 .The winding shall be full coiling without segmenting.

4.3.2.2. The secondary windings shall be either:

- (i) Enameled round copper wire or foil /strip of copper OR;
- (ii) Foil /strip of aluminum conforming to BS 2898.

Note: The copper and aluminum conductor specification shall be as per Table 1.

4.3.2.3. The current density in LV winding shall not exceed $2.8A/mm^2$ for copper and $1.4A/mm^2$ for aluminum winding. The current density in HV winding shall not exceed $2.8A/mm^2$ for copper and $1.4A/mm^2$ for aluminum winding. This will be checked through the relationship: Conductor area = Current per phase/Current density.

4.3.2.4. The characteristics of copper and aluminum required shall be as per IEC 60076-5 and Table 1 and Table 2 below.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

Table 1: Characteristics of copper and aluminum

Property	Material	
	Copper	Aluminum
Specific heat at 100 °C (J/kg· °C)	398.4	928
Density at 100 °C (kg/m ³)	8,894	2,685
Resistivity at 100 °C (μΩ·m)	0.0224	0.0355

Table 2: Characteristics of copper and aluminum foil/coil

Property	Material	
	Copper	Aluminum
Ultimate tensile strength, N/mm ²	205 - 250	60 – 95
Density in 20°C, kg/dm ³	8.91	2.703
Elongation, % , min	>30	>25
Maximum resistance at 20°C, Ωmm ² /m	≤ 0.01724	≤ 0.02825

4.3.2.5. KPLC will inspect built-up winding for its quality, weight of copper or aluminum, insulation and overall weight of coil assembly. The size of conductor used for different windings shall also be checked during stage inspection to check the current density.

4.3.3. Insulating materials

4.3.3.1. The HV and LV windings shall be separated so as to allow for cooling and ease of repair. Insulating sleeves for the transformer tapping's shall be in crepe paper and inter layer insulation shall be in Kraft Paper/ cellulosic paper, press paper and/or crepe paper.

4.3.3.2. There shall be double layer enamel insulation for the copper winding conductor. The insulation shall be of class A with temperature class of 105°C as per IEC 60085.

4.3.3.3. Physical and electrical properties of insulation materials shall be as follows:

a) Press paper

Press paper shall be either a Grade K Thermally Upgraded Press paper or Grade K T/U diamond dotted press-paper (thermo pox)

(i) Grade K Thermally Upgraded Press paper

Grade K Thermally Upgraded Press paper shall be made of sulphate wood pulp and used mainly as a layer insulating paper in low voltage and high voltage windings of oil

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

immersed distribution transformers. Thermally upgraded paper is a cellulose based paper that has been chemically modified to reduce the rate at which the paper decomposes. Thermally upgraded paper shall be able to retain a much higher tensile and bursting strength than untreated papers when exposed to elevated temperatures. The technical characteristics shown in Table 2 shall be as per IEC 60641-2, 60243-1

(ii) Grade K - Diamond dotted press paper - Electrical insulating press papers with B-stage resin dots

Grade K T/U diamond dotted press-paper (thermo pox) is a press paper with qualities to improve the mechanical strength of oil immersed transformer windings without reducing partial discharge levels in accordance with IEC Standards 60641-2 and 60243-1.

b) Crepe paper

Crepe Papers shall be of type 3.2-130-100F or better in accordance with IEC 60554-3-3. It shall have high elongation insulating properties useful for joining and forming tapping leads of transformers. They shall have low dissipation factor suitable for high voltage bushings of transformers, wire wrapping, and shielded rings placed within end sections of power transformer windings. Crepe Papers shall be made a from high quality electrical grade Kraft base papers (100% sulphate wood pulp). The technical characteristics of the paper according to IEC Standards 60554-2 and 60243-1 shall be as per Table 2.

Table 3: Properties of insulating materials

Property	Units	Crepe paper Type 67/130	Press paper	
			Grade K T/U	Grade K T/U Diamond dotted press paper (Thermo pox)
Apparent density,	g/cm ³	-	1.0	1.0
Grammage	g/m ²	134	-	-
Conductivity of aqueous extract	mS/m	1.9	2.2	2.2
Electric strength in oil	kV/mm	-	50	50
Tensile strength	Machine direction	4.5	2.4	2.4
	Cross machine direction	4.6	7.5	7.5

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

c) Kraft Paper/Cellulosic paper

Shall be designation type 1.4-2L with apparent density greater than 0.95g/cm^3 , conductivity over 4mS/m and air permeability "medium" below $0.05\mu\text{m/PA.s}$ as per IEC 60554-3-1.

4.3.3.4. The radial spacer blocks shall be made of pre-compressed pressboard material – type B.3.1 or B.3.3 as per IEC 60641-3-1, which will not soften while in contact with oil or fray out into fibers or edges. The slots shall be so dimensioned that the blocks will not come out of the slots.

4.3.4. Connections

4.3.4.1. The windings and connections shall be properly braced to withstand shocks during transportation or due to short circuit and other transient conditions during service.

4.3.4.2. All active parts comprising of the core, windings and insulation materials used in the construction of the transformer shall be dried under vacuum and impregnated with hot oil.

4.3.4.3. All joints shall be brazed / crimped to withstand the vibrations due to short circuits, transportation and load fluctuations.

4.4. Tapping

4.5.1. Tapping Range

The medium voltage winding shall have tapings at $\pm 2 \times 2.5\%$ operated by an off-circuit switch (tap-changer) with marked position indicators. Tapping details shall be included on the transformer name plate.

4.5.2. Tapping Method

4.5.2.1. Tapping shall be carried out by means of an off-load tap changer. The tap-changer (ratio tap-switch) shall be designed manufactured and tested as per IEC 60214-1 and IEC 60076-1:2011.

4.5.2.2. The ratio tap-switch shall be located on the side of the transformer with sufficient electrical clearance and well submerged in oil. The tap switch shall be rotary type with linear horizontal contacts, provision for padlock of minimum 8mm shank diameter and an approximate height of 220mm.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

- 4.5.2.3. The gap between the ratio tap-switch top to the inside of tank cover shall be minimum 180mm.
- 4.5.2.4. The ratio tap-switch position No. 1 shall correspond to highest voltage on the MV side.
- 4.5.2.5. The tap changer shall be designed in such a way that oil will not come out of it even after the removal / forceful breakage of the tap switch handle.
- 4.5.2.6. The make contacts of the tap changer shall be robust and of sufficient surface area. The tap switch shall comply with relevant requirements of IEC 60214-1 & IEC 60512.

4.5. Core and Flux Density

4.5.1. Core

- 4.5.1.1. The core shall be made of new high permeability material or domain-refined material (CRGO) as per Table 3 and of class C.22 Anisotropic (oriented) steel sheet (lamination) with dimensional properties as per Table – and IEC 60404 Part 1 & Part 8-7 and IEC 60740-1.
- 4.5.1.2. The CRGO material shall be cold rolled having inorganic insulating coating to prevent any form of corrosion (galvanic or oxidation). The tenderers shall be required to provide type test reports confirming compliance to the provisions of the standards of manufacture for purposes of tender evaluation.

Table 4: CRGO Maximum Specific Loss

Material with high permeability as per IEC 60404-8-7	
Nominal Thickness	Maximum specific total loss at 50 Hz
mm	W/kg
0.23	0.90 to 1.00
0.27	1.03 to 1.10
Domain-refined material	
Nominal Thickness	Maximum specific total loss at J= 1.7T at 50 Hz
mm	W/kg
0.23	0.80 to 0.90
0.27	0.85 to 0.95

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

- 4.5.1.3. The design of the magnetic circuit shall be such as to avoid static discharges, development of short-circuit paths within itself or to the earthed or to the clamping structure and the production of flux components at right angles to the plane of the laminations which may cause local heating.
- 4.5.1.4. Every care shall be exercised in the selection, treatment and handling of core steel to ensure that as far as practicable, the laminations are flat and the finally assembled core is free from distortion.
- 4.5.1.5. Adequate cooling shall be provided for the core.
- 4.5.1.6. There shall be no movement of the core assembly relative to the tank during transport, installation as well as in service due to sudden jerks caused by short circuits and fluctuating loads.
- 4.5.1.7. The cores shall be clamped effectively with metal U-shape mild steel clamps or cross-arms and be fitted with core lifting lugs. During factory acceptance testing, the manufacturer shall demonstrate experimentally or via a previous test report, that the whole structural frame-work supporting the transformer windings and the core can definitely withstand repeated transformer short-circuits. All steel sections used for supporting the core shall be thoroughly sand blasted or shot blasted after cutting, drilling and welding before painting. Any non-magnetic or high resistance alloy shall be of established and approved quality.
- 4.5.1.8. Adequate lifting lugs shall be provided to enable core and winding to be lifted. The lifting lugs shall allow a factor of safety of at least 2.
- 4.5.1.9. The supporting framework of the cores shall be so designed as to avoid the presence of pockets which would prevent complete emptying of the tank, or cause trapping of air during filling.
- 4.5.1.10. The insulation structure for the core to bolts and core to clamp plate shall be such as to withstand a voltage of at least 3kV 50Hz for one minute.

4.5.2. Flux Density

- 4.5.2.1. The primary voltage variation, which may affect the flux density at every tap, shall be kept in view while designing the transformer.
- 4.5.2.2. The transformer shall be so designed that the working flux density shall not exceed 1.6 Tesla at normal voltage, frequency and ratio. Tenderers with higher flux density

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

than specified shall not be considered. The lower limit shall be determined by the manufacturer and provided in the bid documents.

4.5.2.3. Tenderers shall indicate in their bid the continuous allowable maximum flux for one minute and five seconds as per IEC 60401-1.

4.5.2.4. The limit of flux density at which core material used saturates shall also be stated in the tender. The name and grade of core material shall be stated in the tender.

4.5.2.5. The tender shall be submitted complete with magnetization curve of the core material, design calculations and data/documents demonstrating compliance to flux density requirements for purposes of tender evaluation.

4.6. Losses

4.6.1. The short circuit impedance and maximum sum total of the transformer losses, measured at full load operation, unity power factor and rated voltage shall be as per BS EN 50464-1 and shall not exceed values indicated in Table 4. Measured values of the no-load losses and the full load losses shall be corrected to 75°C. These are measured at nominal tap.

Table 5: Total Transformer Losses and short circuit impedance

Voltage Class	Rating KVA	TOTAL LOSSES (no-load + load losses) at 75°C, Watts	Short- circuit impedance %
11/0.420kV Transformers	50	840	4
	100	1395	
	200	2685	
	315	3690	
33/0.420kV Transformers	50	1210	4.5
	100	1863	
	200	3050	
	315	4492	

4.6.2. The sound power level, no-load and load losses at 75°C shall be within $\pm 10\%$ of the values in Table 5.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

Table 6: Sound Power Level, No-load and Full Load Losses at 75°C

Voltage Class	Rating KVA	Sound power level (LWA), dB(A)	No-load Losses, Watts	Load losses) at 75°C, Watts	TOTAL LOSSES (no- load + load losses) at 75°C, Watts
11/0.420kV Transformers	50	39	90	750	840
	100	41	145	1250	1395
	200	49	310	2375	2685
	315	52	440	3250	3690
33/0.420kV Transformers	50	50	160	1050	1210
	100	54	293	1570	1863
	200	63	530	2520	3050
	315	63	672	3820	4492

Note: Tenders shall state losses both for nominal tap and extreme taps in the GTPs

4.7. Capitalization

4.7.1. Transformer losses shall be capitalized at the following rates to facilitate evaluation and comparison of tenders.

Table 7: Loss capitalization

Total load losses, ONAN rating (copper loss + stray loss) at rated current at 75° C in KW	US\$ 2577 per kW for 25 years
Total no load losses in KW (core losses)	US\$ 4339 per kW for 25 years

4.7.2. Losses will be capitalized at the above rates and added to the bid price according to the formula below:

$Gep = Gbp + G$ (\$), where Gep = Bid evaluation price, Gbp = Bid price and

G (\$) = Adjustment for the cost of the operation and maintenance for 25 years (all in US Dollars)

G (\$) is obtained by using the following formula:

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

$G (\$) = US\$ 2577 \times \{ \text{Total load losses, ONAN rating (copper loss + stray loss) at rated current at } 75^{\circ} \text{C in KW} \} + US\$ 4339 \times \{ \text{Total no load losses in KW (core losses)} \}.$

- 4.7.3. The guaranteed transformer losses used in the above capitalization formula shall be the maximum allowed and no positive tolerance shall be allowed during acceptance testing.

NOTE: The manufacturer will be penalized double the capitalization rate for every kilowatt by which the actual tested transformer losses exceed the guaranteed losses upon which bids are evaluated. Manufacturers shall possess 0.1 class instruments for measuring losses.

4.8. Bushings and Clearances

4.8.1. Bushings

- 4.8.1.1. The windings shall be brought out separately through open type bushings of outdoor, weatherproof design in accordance with IEC 60137.
- 4.8.1.2. The HV bushings shall be constructed, arranged and fitted in such a manner as to be changed without opening the transformer.
- 4.8.1.3. The HV bushings shall be made of either porcelain or polymeric (composite) material.
- 4.8.1.4. The high voltage bushing shall be fitted with adjustable double-gap arcing horns set at 2 X 25mm gaps for 11kV and 2 X 55mm gaps for 33kV.
- 4.8.1.5. The LV bushing shall be a two part bushing. The bottom portion shall be made with toughened epoxy insulator material and the top portion made of porcelain material, brown in color and shall be mounted on the top cover of the transformer.
- 4.8.1.6. The neutral bushing of the transformer shall be identical to the corresponding LV phase terminal bushings in terms of bushing and bushing rod sizes.
- 4.8.1.7. The external spacing and air clearances shall be so coordinated that there shall be no flashover from the terminal of one winding to the terminal of another winding.
- 4.8.1.8. The specific creepage distance of bushings shall not be less than 25mm/kV, based on the maximum phase to phase voltage. When specifically requested by KPLC in the tender document, the creepage distance shall not be less than 31mm/kV for coastal installations, based on the maximum phase to phase voltage.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

4.8.1.9. Bushing terminals shall be clamp type suitable for aluminum conductor. The terminal connectors shall be clamp type (bolted) connectors with M8 stainless steel bolts, nuts and washers and of the following sizes and materials

Table 8: Terminal Connectors (Bolted Type)

Rating	HV Terminal Connector		LV Terminal Connector	
	Material	Size of conductor	Material	Size of conductor
50KVA	Tinned brass, with tin thickness of 150µm)	50mm ² Cable s/c Cu PVC	Bi-metallic, tinned (copper/brass bushing rod connect to aluminum conductor)	1x50mm ² AAC
100KVA				2x50mm ² AAC
200KVA				2x100mm ² AAC
315KVA				2x100mm ² AAC

4.8.1.10. Terminal arrangement and marking on the HV and LV sides shall be **A, B, C** and **n, a, b, c** respectively.

4.9. Clearances

4.9.1.1. External air clearances

4.9.1.1.1. When totally assembled, as in service, electrical clearances in air shall be adequate to withstand the assigned impulse withstand test voltages.

4.9.1.1.2. Care shall be taken to ensure that all fittings/accessories are suitably positioned so as not to interfere with the external connection to the bushing terminals and clearances.

4.9.1.1.3. Minimum external air clearances (with terminal clamps fitted) shall be as shown under.

Table 9: External Clearances in Air

Nominal System Voltage between Phase Centers		11kV	33kV
Minimum clearance phase-to-earth and phase-to-neutral	mm	200	400
Minimum clearance phase-to-phase between phases of the same winding	mm	200	400
Minimum creepage distance	mm	300	900

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

NOTE: As per clause 16.1 of IEC 60076-3:2013, the clearances in air specified by the standard are only applicable when clearances in air are not specified by the purchaser. In addition, the standard does not consider the risk from intrusion of birds and other animals

4.9.1.2. Internal clearances

Internal clearances shall be as per Table 10:

Table 10: Internal clearances

Description		11kV	33kV
Minimum radial clearance of LV coil and core	mm	5	5
Minimum radial clearance of LV coil and earth	mm	5	5
Minimum radial clearance between LV and MV	mm	12	30
Minimum electrical clearance between the surface of the tank, tapping leads and edge of windings	mm	30	50
Minimum radial clearance between MV and MV windings	mm	15	20

4.10. Insulation Levels

The complete transformer arranged for service, shall be capable of withstanding the voltages indicated in Table 11 and shall comply fully with the requirements of IEC 60076 Part 3.

Table 11: Insulation Levels as per IEC 60076-1:2011 and IEC 60071-1:2006

Nominal system voltage (kV, rms)	Highest system voltage, (kV, rms)	Internal Insulation		
		Lightning withstand positive, (kV, peak)	Impulse voltage, (kV, peak)	Power frequency withstand voltage, (kV, rms)
0.42	1.1kV	-		3
11	12	95		28
33	36	200		70

NOTE:

1. The insulation levels specified are for the internal insulation as per IEC 60076-3 and IEC 60071-1.
2. Altitude correction applied on the external clearances and bushings selection to attain required external insulation as per IEC 60076-3 and IEC 60815.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

4.11. Transformer Tank and Tank Cover

- 4.11.1. The tank shall be bolted top cover type constructed of tested steel plates of sufficient thickness and strength. The tank shall be complete with specified accessories and fittings. It shall be designed so as to allow the complete transformer when filled with oil to be lifted by means of lifting lugs, transported by road, rail or on water without overstraining any joints and without causing subsequent leakage of oil. The minimum thickness of the top cover, bottom and sides of the transformer tank shall be 5mm, 5mm and 3.15mm respectively.

All joints of tank and its fittings shall be oil tight and no bulging shall occur during service.

- 4.11.2. The internal clearance of tank shall be such that it shall facilitate easy lifting of core with windings from the tank.
- 4.11.3. The main tank body shall be pressure tested and a certificate issued/signed by an ISO/IEC 17025 Accredited Laboratory ascertaining the soundness of all welded joints in accordance with relevant ISO standards. A copy of the certificate shall be submitted with the transformers during delivery to KPLC stores.
- 4.11.4. The tank shall be complete with lifting lugs suitable for lifting the complete transformer with oil. The lifting lugs shall be welded on the side walls and shall be heavy duty type made of suitable grade of steel plate of least 8mm thick and shall be reinforced with a factor of safety of at least 2 (based on weight of complete transformer filled with oil).
- 4.11.5. Steel radiators (corrugations) of adequate thickness to deter oil vandalism shall be used for cooling. The transformer shall be capable of giving continuous rated output without exceeding the specified temperature rise.
- 4.11.6. Top tank cover shall be of such a design and construction as to prevent accumulation of water and shall be bolted to the flange on the tank top to form a weatherproof joint. The top cover fixing shall be with hot dip galvanized steel bolts and synthetic rubber-and-cork composition gasket of 6mm minimum thickness. The bolts shall each have two flat washers and one spring washer.
- 4.11.7. The top cover bolts shall include at least four (4) non-standard bolts of dome shaped head with non-standard profile that cannot be opened by use of standard Allen-screws, pipe wrenches, spanners etc. to deter un-authorized opening. One (1) piece of the key/tool for every twenty (20) transformers for opening the special bolts shall be provided to Kenya

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Power during delivery. They shall be delivered to Electrical Plant Transformer Workshop, Isiolo Road, Nairobi.

- 4.11.8. Provision shall be made in form of a removable jumper, to provide for good electrical connection between the top cover and the transformer tank. The jumper shall be sufficiently rated to carry the fault currents without damage. It shall be of tinned copper 25mm x 1.2mm and shall be secured by stainless steel bolt & nut.

4.12. Paint Work

- 4.12.1. External and internal surfaces of all transformer tanks and other fabricated steel items shall be cleaned of scale, rust and surface dirt by shot blast cleaning or other suitable approved method. After cleaning, these surfaces should be immediately covered with paint.
- 4.12.2. The exterior shall be thoroughly cleaned by shot blasting or other approved method and given priming coat/ epoxy painting followed by two coats of contrasting colours of durable weather-resisting paint. The final colour of the exterior surfaces shall be Dark Admiralty Grey colour No. 632 as per BS 381C with a total dry film thickness of between 100 and 130 microns.
- 4.12.3. The interior of all transformer tanks and other oil-filled chambers shall be cleaned of all scale and rust by shot blasting or other approved method. Hot oil resistant varnish/paint shall be used for painting the inside the transformer tank and oil filled chambers. The manufacturer shall demonstrate this for inside of radiators and pipe connections.
- 4.12.4. Radiators shall be thoroughly degreased and treated externally by phosphating and/or other rust-inhibiting process.
- 4.12.5. Radiators shall be flood-painted with a primer and two coats of durable weather and oil resisting paint. The final external coat shall be high gloss of shade No. 632 (Admiralty Grey) according to BS 381C. The total paint thickness shall not be less than 85µm at any point.

4.13. Transformer Oil

- 4.13.1. Cooling of the transformer shall be by natural circulation of oil and natural circulation of air (ONAN). The transformer shall be supplied filled with new oil.
- 4.13.2. The oil shall be new, unused and shall comply with all the requirements of IEC 60296 and IEC 60422:2013(class 1: un-inhibited oil) and as per current KPLC specification No. KP1/6C.1/13/TSP/08/001 (Shall be attached during tender).

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

4.14. Surge Arresters

- 4.14.1. Each transformer shall be complete with surge arresters mounted on brackets (one number per phase) fitted under the HV bushings with steel earth strip of at least 50mm x 6mm wide connected to the body of the transformer with necessary fixing arrangements.
- 4.14.2. The fixing arrangement for the surge arresters shall be universal type to accept a wide range of surge arresters and shall be subject to approval by KPLC before manufacture.
- 4.14.3. All the ferrous parts of the mounting brackets shall be protected against corrosion by hot dip galvanizing to ISO 1461.
- 4.14.4. The surge arresters (to IEC 60099-4&5) shall be as per current KPLC specification No. KP1/6C.1/13/TSP/11/32.

4.15. Fittings and Accessories

- 4.15.1. The transformer shall be complete with the following fittings and accessories:

a) Pressure relief device:

- (i) Hermetically sealed transformers shall be equipped with a pressure relief device preset such that when a pressure exceeding design pressure occurs inside the transformer, the pressure relief device opens to evacuate the pressure.
- (ii) The pressure relief device shall be mounted on top cover and its design shall prevent rain water entering into the transformer. It shall not protrude higher than the height of the transformer bushings above the top cover (for 33kV transformer).

b) Oil level gauge:

This shall be clearly readable by an operator standing at ground level at a distance of 5 meters away from the transformer mounting. The oil level gauge shall have maximum and minimum oil level markings which shall fall within range of the gauge. The nominal oil level shall be at the center of the range. The oil level gauge shall be mounted on the top of the transformer tank for sealed type transformer and on the side of the conservator for the free breathing type transformer.

c) Earthing terminals:

There shall be two (2) earthing terminals (with cable lug) on the side of the body of the transformer below the radiators diagonally opposite each other. Each terminal shall have two flat washers, one spring washer and lock nut, all in stainless steel. The earthing terminal lugs shall be in tinned copper and shall be suitable for 50mm² conductor.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 24 of 62	

d) Lifting lugs:

Separate lifting lugs for core, top cover and complete transformer (as per requirements given in this specification).

e) Off-circuit tap changer:

Tap-changer shall be mounted as per this specification. The tap changer shall be rotary type with linear horizontal contacts; it shall not allow water ingress or oil leakage and have mechanical interlock at each tap corresponding to each tap position. It shall have provision for padlock as per this specification.

f) Rating and diagram plate:

Shall be designed with weatherproof material fitted a visible position. The entries of the plate shall be indelibly marked with information as per IEC 60076-1:2011 clause 8.2 and or 8.3 and this specification.

g) Clamp connectors:

If required, LV clamp connectors shall be made of tinned copper alloy (brass, bronze or phosphor bronze). The tin coating thickness shall be 150µm.

h) Thermometer pocket to be used during temperature rise test.

i)Jacking lugs

j)Combined drain plug and sampling device.

k) Surge arrester mounting brackets as per clause 4.15

l)Arcing horns:

Arcing horns shall be provided on each 33kV MV bushing as per attached drawings

4.15.2. All fittings and accessories shall be designed and secured in such a manner that makes it impossible for vandals to siphon oil from the transformer even after forceful breakage of the fitting/accessory. There shall be no oil leaks from the fittings and accessories.

4.15.3. Detailed drawings for the transformer (including internal details) and its components showing features that make it impossible for vandals to siphon oil from the transformer even after forceful breakage of the fitting/accessory shall be submitted to KPLC for approval before manufacture.

4.15.4. The tank shall be equipped with mounting rails at the bottom which shall facilitate lifting with a forklift.

4.16. Quality Management System

4.16.1. The supplier shall submit a quality assurance plan (QAP) that will be used to ensure that the transformer design, material, workmanship, tests, service capability, maintenance and documentation, will fulfill the requirements stated in the contract documents, standards, specifications and regulations. The QAP shall be based on and include relevant parts to fulfill the requirements of ISO 9001:2008.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

4.16.2. The Manufacturer's Declaration of Conformity to reference standards and copies of quality management certifications including copy of valid and relevant ISO 9001: 2008 certificate shall be submitted with the tender for evaluation.

4.16.3. The bidder shall indicate the delivery time of each type of transformer, manufacturer's monthly & annual production capacity and experience in the production of the type and size of transformer being offered. A detailed list & contact addresses (including e-mail) of the manufacturer's previous customers outside the country of manufacture for exact or similar rating of transformers sold in the last five years together with four customer reference letters shall be submitted with the tender for evaluation.

5. TESTS AND INSPECTION

5.1. The transformer shall be inspected and tested in accordance with the requirements of IEC 60076-1:2011 and this specification. The various components and materials shall be tested in accordance to the latest versions of the relevant manufacturing standards.

It shall be the responsibility of the manufacturer to perform or to have performed all the tests specified. Tenderers shall confirm the manufacturer's capabilities in this regard when submitting tenders. Any limitations shall be clearly specified.

5.2. Copies of Type Test Certificates & Type Test Reports issued by a third party testing laboratory that is accredited to ISO/IEC 17025 shall be submitted with the tender for the purpose of technical evaluation. A copy of the accreditation certificate to ISO/IEC 17025 for the testing laboratory shall also be submitted. Any translations of certificates and test reports into English language shall be signed and stamped by the Testing Laboratory that carried out the tests.

Copies of type test certificates and type test reports for the transformer offered to be submitted for tender evaluation shall include:

- Dielectric tests to IEC 60076-3:2000 (Lightning Impulse Withstand Voltage Test).
- Short circuit withstand test to IEC 60076-5:2006.
- Temperature rise test to IEC 60076-2:2011.

Type Test Reports for a transformer of identical or higher voltage and identical or higher kVA rating and within the range of 11/0.420kV – 36/0.420kV and 500KVA- 2500KVA shall be accepted as representative for any of the ground mounted three phase distribution transformer on tender. The type test reports shall be for a transformer of the same core design and construction as the transformer being offered. The type tests shall be valid for least five (5) years.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 26 of 62	

Note: Temperature rise test to IEC 60076 if conducted at the manufacturer's premises (factory) shall be in the presence of representatives of ISO/IEC 17025 accredited third party testing laboratory; who shall sign and stamp the certificates and test reports.

5.3. The transformer shall be subject to acceptance tests at the manufacturer's works before dispatch. Acceptance tests shall be witnessed by two Engineers appointed by KPLC and shall include the following:

5.3.1. Routine tests to IEC 60076-1:2011 (to be done during acceptance testing at factory)

- Measurement of winding resistance
- Ratio test
- Vector group
- Separate source voltage withstand test
- Induced over-voltage
- Insulation resistance
- Measurement of impedance voltage
- Measurement of no-load loss and current
- Measurement of load loss (at normal & extreme taps)
- Tests on off-load tap-changer
- Any other test not listed above but specified by IEC 60076-1:2011.

5.3.2. Type Tests to IEC 60076-1:2011 (to be done on one unit during acceptance testing at factory)

- (i) Temperature rise test – To be performed on one unit during acceptance testing.
- (ii) Lightning impulse withstand test – To be performed on one unit during acceptance testing.

5.3.3. Additional tests (to be done on samples during acceptance testing at factory)

- (i) Visual Inspection (verification of dimensions, fittings & accessories, markings & nameplates, paintwork, workmanship and finish) – IEC 60076-1:2011
- (ii) Acoustic and sound level – IEC 60076-10 or NEMA - TR1
- (iii) Paint thickness – ISO 2944.
- (i) Oil leakage test – IEC 60076-1:2011 clause 11.8,

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31



TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-
02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 27 of 62

5.3.4. Sampling for routine tests and additional tests shall be as per IEC 60410. Sampling plans and procedures for inspection by attributes

- 5.4. The manufacturer shall provide current e-mail address, fax and telephone numbers and contact person at the Testing Laboratory where the type tests were obtained.
- 5.5. Complete Test Reports for each transformer (including its individual components) shall be submitted to KPLC for approval before shipment.
- 5.6. On receipt of the transformers KPLC will inspect them before acceptance to stores and perform the relevant tests (including verification of losses) in order to verify compliance with the specification. The supplier shall replace/rectify without charge to KPLC, transformers and components/fittings which upon examination, test or use fail to meet any of the requirements in the specification.

6. MARKING, LABELLING AND PACKING

- 6.1 The transformer and associated components shall be packed in a manner as to protect them from any damage in transportation and handling. The transformer shall first be mounted and bolted to wooden base blocks and then covered with a polythene cover. The transformer with the wooden base blocks shall then be secured tightly in the container to avoid transit movements.
- 6.2 The transformer shall be dispatched fully assembled, oil filled and complete with all accessories specified in this specification
- 6.3 Each assembly & package of items associated with the transformer shall be suitably marked.
- 6.4 In addition to markings and labels required elsewhere in the specification, each transformer shall be provided with a rating and diagram plate of weatherproof material, fitted in a visible position, showing the appropriate details listed in IEC 60076-1:2011. The entries on the plate shall be indelibly marked (either by etching, engraving or stamping) and shall be legible and permanent.
- 6.5 In addition, the rating and diagram plate shall include load and no load losses for the highest, lowest and principle tap positions, temperature class of insulation, connection diagram and the inscription 'PROPERTY OF THE KENYA POWER AND LIGHTING CO. LTD' all marked indelibly and legibly as in 6.4.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:

Signed:

Date: 2015-07-31

Date: 2015-07-31

7. DOCUMENTATION

7.1 The bidder shall submit its tender complete with technical documents required by Annex A (Guaranteed Technical Particulars) for tender evaluation. The documents to be submitted (all in English language) for tender evaluation shall include the following:

- a) Guaranteed Technical Particulars fully filled and signed by the manufacturer;
- b) Copies of the Manufacturer's catalogues, brochures, drawings and technical data;
- c) Sales records for previous five years and reference letters from at least four of the customers;
- d) Details of manufacturing capacity and the manufacturer's experience;
- e) Copies of required type test certificates and type test reports by a third party testing laboratory accredited to ISO/IEC 17025;
- f) Copy of accreditation certificate to ISO/IEC 17025 for the third party testing laboratory;
- g) Manufacturer's warranty and guarantee; subject to 72 months from date of delivery to KPLC stores or 60 months from the date of commissioning, whichever period expires earlier

Note: KPLC commissioning reports shall be accepted.

- h) Manufacturer's letter of authorization, copy of the manufacturer's ISO 9001:2008 certificate and other technical documents required in the tender.

7.2 The successful bidder (supplier) shall submit the following documents/details (from the manufacturer as per tender) to The Kenya Power & Lighting Company for approval before manufacture:

- a) Guaranteed Technical Particulars fully filled and signed by the manufacturer;
- b) Design drawings & construction details of the transformer including 3-D views and as per the requirements of clause 4.2.17;
- c) Quality assurance plan (QAP) that will be used to ensure that the design, material, workmanship, tests, service capability, maintenance and documentation will fulfill the requirements stated in the contract documents, standards, specifications and regulations. The QAP shall be based on and include relevant parts to fulfill the requirements of ISO 9001:2008;
- d) Test Program to be used after manufacture;
- e) Marking details and method to be used in marking the transformer;
- f) Manufacturer's undertaking to ensure adequacy of the design, adherence to applicable regulations, standards and specification, ensure good workmanship and good engineering practice in the manufacture of the transformers for The Kenya Power and Lighting Company Limited;

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 29 of 62

- g) Packaging details (including packaging materials and marking and identification of component packages).
- h) The drawings to be submitted by the supplier to KPLC for approval before manufacture shall be in standard format clearly indicating drawing number, parts list with material details and quantities, standard of manufacture, ratings, approval details and identity of the manufacturer (as per manufacturer's authorization submitted during tendering).

-----SPACE LEFT BALANK-----

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 30 of 62	

ANNEX A: SCHEDULE OF GUARANTEED TECHNICAL PARTICULARS FOR OFFERED TRANSFORMER

(to be filled and signed by the Manufacturer and submitted together with relevant copies of the Manufacturer's catalogues, brochures, drawings, technical data & calculations, sales records for past five years, four customer reference letters, details of manufacturing capacity, the manufacturer's experience, copies of complete type test reports and accreditation certificate to ISO/IEC 17025 for the third party testing laboratory for tender evaluation, all in English Language)

TENDER NO.BIDDER'S NAME & ADDRESS

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	Name and address of the Manufacturer				
	Country of manufacture				
	Manufacturer's Letter of Authorization				
	Model/Type Reference No. of the offered transformer				
	Drawing Reference Number				
	Manufacturer's warranty and guarantee certificate for the offered transformer				
1.	Scope: a) Design, manufacture, test, ship and deliver ground mounted three phase distribution transformer to KPLC store/site as per specification and terms of contract. b) Ensure adequacy of the design, good workmanship, good engineering practice and adherence to standards, specifications and applicable regulations in the manufacture of the transformers for KPLC				
2	Applicable Standards				
3	Terms and Definitions				
4.1.1	Operating Service Conditions: <i>indicate altitude, temperature range, humidity, pollution and isokeraunic level)</i>				
4.1.2.1- 4.1.2.3	System Characteristics				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 31 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.2	General Requirements	-	-	-	-
4.2.1	Outdoor, oil type, ONAN and core type				
4.2.2	Design Service Life				
4.2.3	Two winding, three phase integral unit				
4.2.4	Types of transformers offered				
4.2.4.1	Hermetically sealed type each with provision for oil expansion				
	Active parts submerged in oil and provision for oil expansion				
4.2.4.2	Free breathing type, conservator with cobalt free dehydrating breather& oil gauge				
4.2.5	Design to facilitate operation, inspection, maintenance & repairs				
4.2.6	Safety & Regulatory Requirements				
4.2.7	No water pockets, rain water do not collect on top, cover with 10mm overlap to conceal gasket				
4.2.8	Corresponding parts to be interchangeable				
4.2.9	Fittings & accessories secured from inside or have openings that do not allow oil siphoning				
4.2.10	Test certificates for transformer components and materials – Attach for verification				
4.2.11	All connections & contacts of ample section and surface for required currents				
4.2.12	Materials used do not lead to acidity in oil				
4.2.13	State value of maximum noise level (BS EN 50464-1) or NEMA TR1				
4.2.14	Transportation to withstand 1g beyond gravitational acceleration				
4.2.15	Suitable for ground with mounting, steel channel under base				
4.2.16	Drawings of offered transformer				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 32 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	Overall dimensions of offered transformer (length, width & height) in mm				
4.2.17a) to g)	Design drawings for approval before manufacture				
	Overall dimensions of the transformer and relevant electrical clearances. This shall include all perspectives and respective:				
	(i) Weight of oil,				
	(ii) Weight of LV winding conductor				
	(iii) Weight of HV winding conductor				
	(iv) Core material,				
	(v) Copper/aluminium winding material,				
	(vi) Insulating materials and				
	(vii) Steel tank/core clamp structure.				
	Core/coil/insulation dimensions, clearances (internal and external) and stacking/coil winding sequence detail.				
	Drawing of nameplate to scale.				
	Dimensional drawing of bushings, tap-changer and clamps.				
	Legend for all technical engineering drawings with manufacturer name, logo, model number, revision/drawing number and key				
	Detailed drawing of arcing horns where applicable.				
	Detailed drawing of arcing horns where applicable.				
	All design drawings MUST BE stamped and signed by the manufacturer's authorised personnel.				
4.3.1	KVA, no-load voltage ratings and				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31


Page 33 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>		BIDDER'S OFFER			
			50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	frequency					
4.3.2	Temperature Rise	Top Oil				
		Windings				
		Winding hot spot and of metallic part in contact with cellulose				
	Temperature Rise Test					
4.3.3	Fault level for 2 seconds					
4.3.4	Demonstration of thermal ability of offered transformer design to withstand short circuit (submit detailed calculation in accordance with clause 4.1.2 and 4.1.5 of IEC 60076-5)					
	Value of symmetrical short-circuit current I as per clause 4.1.2 of IEC 60076-5					
	Duration of the symmetrical short-circuit current as per clause 4.1.3 of IEC 60076-5					
	Maximum permissible values of the average temperature of each winding after short circuit as per clause 4.1.4 of IEC 60076-5					
	Short circuit current density (A/mm ²) MV winding					
	Short circuit current density (A/mm ²) LV winding					
	Average temperature θ_1 attained by each winding after short circuit (calculation of temperature as per clause 4.1.5 of IEC 60076-5)					
	Overload capacity for 2 hours after continuous full load run (indicate clause & standard)					
4.3.5	Calculation showing details and compliance with the requirements of clause 4.1.1 to 4.1.5 of IEC 60076-5					

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>		BIDDER'S OFFER			
			50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.3.6	Type test report for the ability of the offered transformer to withstand dynamic effects of short circuit					
4.4	Windings, insulation and connections		-	-	-	-
4.4.1.1	Vector group					
4.4.1.2	Voltage variations					
4.4.1.3	Insulating material shall not soften, ooze, shrink or collapse during service. The material shall be non-catalytic & chemically inert in transformer oil					
4.4.2	Primary windings					
4.4.2.1	Secondary windings					
4.4.2.2	Current density, A/mm ²	MV winding				
		LV winding				
	Material of winding	MV winding				
		LV winding				
	Conductor area of winding mm ²	MV winding				
		LV winding				
	Resistance at 20°C	MV winding				
		LV winding				
4.4.2.3	Characteristics of copper wire and aluminum wire					
Copper		Standard of manufacture				
		Type designation or grade				
		Specific heat at 100 °C (J/kg· °C)				
		Density at 100 °C (kg/m ³)				
		Resistivity at 100 °C (μΩ·m)				
Aluminum		Standard of manufacture				
		Type designation or grade				
		Specific heat at 100 °C (J/kg· °C)				
		Density at 100 °C (kg/m ³)				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 35 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	Resistivity at 100 °C ($\mu\Omega\cdot m$)				
	Characteristics of copper and aluminum foil/strip				
Copper	Standard of manufacture				
	Type designation or grade				
	Ultimate tensile strength, N/mm ²				
	Density in 20°C, kg/dm ³				
	Elongation, % , min				
	Maximum resistance at 20°C, $\Omega mm^2/m$				
aluminum	Standard of manufacture				
	Type designation or grade				
	Ultimate tensile strength, N/mm ²				
	Density in 20°C, kg/dm ³				
	Elongation, % , min				
	Maximum resistance at 20°C, $\Omega mm^2/m$				
4.4.2.4	Stage inspection by Kenya Power				
	Insulating material	-	-	-	-
4.4.3.1	Separation of windings for cooling and ease of repair				
	Insulation sleeves material				
	Interlayer insulation material				
4.4.3.2	Double layer insulation				
	Temperature class of insulation				
	Crepe paper	Standard of manufacture			
		Type designation or grade			
		Apparent density,			
		Grammage			
		Conductivity of aqueous extract			
		Electric strength in oil			
	Tensile strength	Machine direction			

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 36 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>		BIDDER'S OFFER			
			50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
		Cross machine direction				
Press paper – Grade type	Standard of manufacture					
	Type designation or grade					
	Apparent density,					
	Grammage					
	Conductivity of aqueous extract					
	Electric strength in oil					
	Tensile strength	Machine direction				
		Cross machine direction				
Kraft paper/ Celulosic paper	Standard of manufacture					
	Type designation or grade					
	Apparent density					
	Conductivity					
	Air permeability					
Radial spacer blocks	Standard of manufacture					
	Type designation or grade					
	Electrical and mechanical properties					
4.4.4	Connections					
4.4.4.1	Windings, joints & connections braced/brazed?					
4.4.4.2	Drying in vacuum & impregnating with hot oil					
4.5	Tapping		-	-	-	-
4.5.1	Tapping range					
4.5.2.	Tapping method and design					
4.5.2.1	Tap changer (ratio tap-switch)	Standard of manufacture				
		Type designation or				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 37 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	grade				
	Mode of operation				
	Shank diameter				
	Height of ratio tap-switch				
4.5.2.3	Gap between ratio tap-switch top to the inside of the tank				
4.5.2.4	Tap switch position number 1, orientation				
4.6	Core and Flux Density	-	-	-	-
4.6.1	Core				
	Standard of manufacture of core material				
4.6.1.1	Type designation or Grade of core steel				
	Insulating material for CRGO to prevent corrosion				
4.6.1.2	Thickness of each single lamination				
	Net core area, mm ²				
	Number of turns on LV, per phase				
	Stack factor/Building factor				
	Weight of core, kg				
	Specific loss in watts/kg (at 1.6T flux density)				
4.6.1.3	Static discharges & local heating				
4.6.1.4	Assembled core free from distortion				
4.6.1.5	Cooling for core				
4.6.1.6	Movement of core during transportation or in service				
4.6.1.7	Core clamping				
4.6.1.8	Lifting lugs for core, winding and complete transformer. Factor of safety at least 2.				
4.6.1.9	Oil pockets & trapping of air				
4.6.1.10	Insulation withstand of core to bolts and core to frame				
4.6.2	Flux density	-	-	-	-

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.6.2.1	Effect of primary voltage variations on flux density				
4.6.2.2	Maximum flux density				
	Lowest limit of flux density				
4.6.2.3	Allowable maximum flux density				
	1 min 5 s				
4.6.2.4	Flux density at which core saturates				
4.6.2.5	Magnetization curve and design calculations				
4.7	Losses	-	-	-	-
4.7.1	Short-circuit Impedence, %				
	Resistance at 75°C of MV Winding in ohms (at normal & extreme taps)				
	Resistance at 75°C of LV Winding in ohms				
	Minimum efficiency at 100% load (unity power factor), at 75°C				
	Total losses (no-load + load losses) at 100% load				
	No-load Losses at 75°C				
	Load Losses at 50% load, 75°C				
	Load Losses at 75% load, 75°C				
	Load Losses at 100% load, 75°C				
	I ² R component of load losses at 100% load, 75°C				
	Load Losses at 125% load, 75°C				
	Stray Losses at 50% load, 75% load, 100% load and 120% load, all at 75°C				
	Total losses at maximum tap				
	Total losses at Minimum tap all at 75°C				
4.7.2	Sound power level				
4.7.3	No-load and Load Losses shall be submitted in the tender				
4.7.4	Capitalization				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

**Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer**

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 39 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.8	Bushings and clearances	-	-	-	-
4.8.1.1	Open, outdoor & weatherproof bushings to IEC 60137				
4.8.1.2	Bushings to be changed without opening transformer				
4.8.1.3	HV bushings to be polymeric or porcelain. Specify				
4.8.1.4	33kV Bushings complete with surge diverter bracket and arcing horns				
4.8.1.5	LV bushings shall be two part, bottom in toughened epoxy and top in porcelain, brown				
4.8.1.6	Neutral bushing identical to LV phase bushing				
4.8.1.7	Spacing & clearances				
4.8.1.8	Creepage distance of bushings: HV, LV, N				
	Coastal regions Creepage distance of bushings: HV, LV, N				
4.8.1.9	Clamp type bushing terminals for aluminum conductor				
	Materials, size and drawings for terminal connectors				
4.8.1.10	Marking and method of marking of terminals				
4.8.1.11	Continuous current rating of each bushing				
4.8.2	Clearances				
4.8.2.1	External air clearances				
4.8.2.1.1	Adequate to withstand impulse withstand test voltages				
4.8.2.1.2	Position of fittings & accessories not to interfere with external connection to bushing terminals				
4.8.2.1.3	Minimum external clearances & creepage				
	LV, mm				
	(cable box) Phase to phase				
	Phase to earth				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 40 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	Creepage distance				
	11kV, mm				
	(cable box)				
	Phase to phase				
	Phase to earth				
	Creepage distance				
	33kV, mm				
	(open)				
	Phase to phase				
	Phase to earth				
	Creepage distance				
4.8.2.2	Internal clearances				
	Minimum radial clearance of LV coil and core, mm				
	Minimum radial clearance of LV coil and earth, mm				
	Minimum radial clearance between LV and HV, mm				
	Minimum electrical clearance between the surface of the tank and tapping leads, mm				
	Minimum radial clearance between HV and HV windings, mm				
4.9	Insulation Levels (internal)				
	LV: Power frequency withstand voltage				
	11kV: Lightning impulse & power frequency withstand voltages				
	33kV: Lightning impulse & power frequency withstand voltages				
	External insulation level and altitude correction (indicate offered insulation and altitude correction applied)				
4.10	Transformer Tank & Tank Cover	-	-	-	-
4.10.1	Bolted top cover design				
	Minimum thickness of top cover, bottom and sides of offered transformer respectively				
4.10.2	Inside clearance				
4.10.3	Pressure test of tank and test report during delivery				
4.10.4	Lifting lugs and factor of safety				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

**Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer**

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 41 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.10.5	Steel radiators				
4.10.6	Top cover design, non-accumulation of rain water, gasket & non-standard bolts and nuts				
4.10.7	4 non-standard bolts on top cover				
4.10.8	Removable jumper of 25mm x 1.2mm tinned copper & stainless steel bolt & nut				
4.11	Paint Work	-	-	-	-
4.11.1	Method of cleaning before painting				
4.11.2	Final color of exterior surfaces and paint thickness				
4.11.3	Cleaning and painting of interior of tank and other oil filled chambers				
4.11.4	Degreasing & treatment of radiators with anti-rust inhibitor				
4.11.5	Final color of exterior of radiators & paint thickness & painting method				
4.12.1	Fittings and Accessories	-	-	-	-
4.12.1(a) i	Pressure at which pressure relief device operates				
ii	Pressure Relief Device & location				
4.12.1 (b)	Oil Level Gauge & location				
4.12.1 (c)	Earthing Terminals: location & to have stainless steel bolt, nut & washer and tinned copper terminal lug for 50mm ² conductor				
4.12.1 (d)	Separate Lifting lugs for core, top cover, conservator & complete transformer				
4.12.1 (e)	Off-circuit tap changer & location				
4.12.1 (f)	Tinned copper jumper size and materials				
4.12.1 (g)	Rating and diagram plate				
4.12.1 (h)	Clamp connectors				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 42 of 62	

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>		BIDDER'S OFFER			
			50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
4.12.1 (i)	Jacking Lags					
4.12.1 (j)	Combined drain plug and sampling device					
4.12.1 (k)	Surge arrester mounting brackets	Mounting Brackets dimensions				
		Universal type				
		Galvanized to ISO 1461				
4.12.1 (l)	Arcing horns					
4.12.2	Features to deter oil vandalism					
4.12.3	Detailed drawings					
4.12.4	Transformer mounting rails at bottom					
4.13	Transformer Oil – technical particulars shall be as per KP1/6C.1/13/TSP/08/001					
4.14	Surge Arresters technical particulars shall be as per KP1/6C.1/13/TSP/11/32.					
4.15	Quality Management System		-	-	-	-
4.15.1	Quality Assurance Plan to be based on ISO 9001:2008					
4.15.2	Declaration of conformity to IEC 60076					
	Copy of ISO 9001:2008 certificate submitted					
4.15.3	Monthly & annual production capacity					
	List of previous customers					
	Reference letters from at least four previous customers					
5.	Tests and Inspection		-	-	-	-
5.1	Test Standard					
	Responsibility of testing transformer & manufacturer's capability to carry out specified tests					
5.2	Copies of type test reports to IEC 60076		-	-	-	-
	Lightning impulse withstand test					
	Short circuit withstand test					
	Temperature rise test					
5.3	Acceptance tests at manufacturers					

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

**Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer**

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 43 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	premises				
5.3.1	Routine tests to IEC 60076				
5.3.2	Type tests to IEC 60076				
	Temperature rise test				
	Lightning impulse withstand test				
5.3.3	Additional tests (sample test)				
5.3.4	Sampling as per IEC 60410				
5.4	Contact details for testing authority				
5.5	Complete test reports for approval before shipment				
5.6	Inspection or test by KPLC during delivery before acceptance to stores				
6.	Marking, Labeling & Packing	-	-	-	-
6.1	Packing: mounted & bolted on wooden base blocks				
6.2	Dispatch fully assembled & oil filled				
6.3	Assemble & package of items suitably marked				
6.4	Permanent Rating & Diagram plate indelibly marked (by etching, engraving or stamping)				
6.5	Content of marking				
7.1	Tender submitted with all technical documents				
7.2	Successful bidder to submit documents/details for approval before manufacture				
Other details required with the tender	Weight of complete transformer, kg				
	Weight of tank, kg				
	Material of tank				
	Weight of oil, kg				
	Weight of core, kg				
	Weight of HV windings (without insulation), kg				
	Weight of LV windings (without insulation), kg				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 44 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right</i>	BIDDER'S OFFER			
		50kVA 11/0.42	100kVA 11/0.42	200kVA 11/0.42	315kVA 11/0.42
	Weight of insulation, kg				
	Manufacturer's experience				
	Detailed list of all the required fittings and accessories indicating type/model number, manufacturer and quantities				
	List catalogues, brochures and technical data submitted to support offer				
	Deviations from tender specifications (indicate supporting documents submitted)				

.....
Manufacturer's Name, Signature, Stamp and Date

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 45 of 62

B) 33kV TRANSFORMERS

ANNEX A: SCHEDULE OF GUARANTEED TECHNICAL PARTICULARS FOR OFFERED TRANSFORMER

(to be filled and signed by the Manufacturer and submitted together with relevant copies of the Manufacturer's catalogues, brochures, drawings, technical data & calculations, sales records for past five years, four customer reference letters, details of manufacturing capacity, the manufacturer's experience, copies of complete type test reports and accreditation certificate to ISO/IEC 17025 for the third party testing laboratory for tender evaluation, all in English Language)

TENDER NO.BIDDER'S NAME & ADDRESS

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	Name and address of the Manufacturer				
	Country of manufacture				
	Manufacturer's Letter of Authorization				
	Model/Type Reference No. of the offered transformer				
	Drawing Reference Number				
	Manufacturer's warranty and guarantee certificate for the offered transformer				
1.	Scope: a) Design, manufacture, test, ship and deliver ground mounted three phase distribution transformer to KPLC store/site as per specification and terms of contract. b) Ensure adequacy of the design, good workmanship, good engineering practice and adherence to standards, specifications and applicable regulations in the manufacture of the transformers for KPLC				
2	Applicable Standards				
3	Terms and Definitions				
4.1.1	Operating Service Conditions: <i>indicate altitude, temperature range, humidity, pollution and isokeraunic level</i>)				
4.1.2.1-	System Characteristics				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 46 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
4.1.2.3					
4.2	General Requirements	-	-	-	-
4.2.1	Outdoor, oil type, ONAN and core type				
4.2.2	Design Service Life				
4.2.3	Two winding, three phase integral unit				
4.2.4	Types of transformers offered				
4.2.4.1	Hermetically sealed type each with provision for oil expansion				
	Active parts submerged in oil and provision for oil expansion				
4.2.4.2	Free breathing type, conservator with cobalt free dehydrating breather& oil gauge				
4.2.5	Design to facilitate operation, inspection, maintenance & repairs				
4.2.6	Safety & Regulatory Requirements				
4.2.7	No water pockets, rain water do not collect on top, cover with 10mm overlap to conceal gasket				
4.2.8	Corresponding parts to be interchangeable				
4.2.9	Fittings & accessories secured from inside or have openings that do not allow oil siphoning				
4.2.10	Test certificates for transformer components and materials – Attach for verification				
4.2.11	All connections & contacts of ample section and surface for required currents				
4.2.12	Materials used do not lead to acidity in oil				
4.2.13	State value of maximum noise level (BS EN 50464-1) or NEMA TR1				
4.2.14	Transportation to withstand 1g beyond gravitational acceleration				
4.2.15	Suitable for ground with mounting, steel channel under base				
4.2.16	Drawings of offered transformer				
	Overall dimensions of offered transformer (length, width & height) in mm				
4.2.17a)	Design drawings for approval before manufacture				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 47 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
to g)	Overall dimensions of the transformer and relevant electrical clearances. This shall include all perspectives and respective:				
	(i) Weight of oil,				
	(ii) Weight of LV winding conductor				
	(iii) Weight of HV winding conductor				
	(iv) Core material,				
	(v) Copper/aluminium winding material,				
	(vi) Insulating materials and				
	(vii) Steel tank/core clamp structure.				
	Core/coil/insulation dimensions, clearances (internal and external) and stacking/coil winding sequence detail.				
	Drawing of nameplate to scale.				
	Dimensional drawing of bushings, tap-changer and clamps.				
	Legend for all technical engineering drawings with manufacturer name, logo, model number, revision/drawing number and key				
	Detailed drawing of arcing horns where applicable.				
	Detailed drawing of arcing horns where applicable.				
	All design drawings MUST BE stamped and signed by the manufacturer's authorized personnel.				
4.3.1	KVA, no-load voltage ratings and frequency				
4.3.2	Temperature Rise	Top Oil			
		Windings			
		Winding hot spot and of metallic part in contact with cellulose			
	Temperature Rise Test				
4.3.3	Fault level for 2 seconds				
4.3.4	Demonstration of thermal ability of offered transformer design to withstand short circuit				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 48 of 62	

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	(submit detailed calculation in accordance with clause 4.1.2 and 4.1.5 of IEC 60076-5)				
	Value of symmetrical short-circuit current I as per clause 4.1.2 of IEC 60076-5				
	Duration of the symmetrical short-circuit current as per clause 4.1.3 of IEC 60076-5				
	Maximum permissible values of the average temperature of each winding after short circuit as per clause 4.1.4 of IEC 60076-5				
	Short circuit current density (A/mm ²) MV winding				
	Short circuit current density (A/mm ²) LV winding				
	Average temperature θ_1 , attained by each winding after short circuit (calculation of temperature as per clause 4.1.5 of IEC 60076-5)				
	Overload capacity for 2 hours after continuous full load run (indicate clause & standard)				
4.3.5	Calculation showing details and compliance with the requirements of clause 4.1.1 to 4.1.5 of IEC 60076-5				
4.3.6	Type test report for the ability of the offered transformer to withstand dynamic effects of short circuit				
4.4	Windings, insulation and connections	-	-	-	-
4.4.1.1	Vector group				
4.4.1.2	Voltage variations				
4.4.1.3	Insulating material shall not soften, ooze, shrink or collapse during service. The material shall be non-catalytic & chemically inert in transformer oil				
4.4.2	Primary windings				
4.4.2.1	Secondary windings				
4.4.2.2	Current density, A/mm ²				
	MV winding				
	LV winding				
	Material of winding				
	MV winding				
	LV winding				
	Conductor				
	MV winding				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 49 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
4.4.2.3	area of winding mm ²				
	LV winding				
	Resistance at 20°C				
	MV winding				
	LV winding				
	Characteristics of copper wire and aluminum wire				
	Copper	Standard of manufacture			
		Type designation or grade			
		Specific heat at 100 °C (J/kg. °C)			
		Density at 100 °C (kg/m ³)			
		Resistivity at 100 °C (μΩ.m)			
	aluminum	Standard of manufacture			
		Type designation or grade			
		Specific heat at 100 °C (J/kg. °C)			
		Density at 100 °C (kg/m ³)			
		Resistivity at 100 °C (μΩ.m)			
	Characteristics of copper and aluminum foil/strip				
	Copper	Standard of manufacture			
		Type designation or grade			
		Ultimate tensile strength, N/mm ²			
		Density in 20°C, kg/dm ³			
		Elongation, % , min			
		Maximum resistance at 20°C, Ωmm ² /m			
	aluminum	Standard of manufacture			
		Type designation or grade			
		Ultimate tensile strength, N/mm ²			
		Density in 20°C, kg/dm ³			
		Elongation, % , min			
		Maximum resistance at 20°C, Ωmm ² /m			
4.4.2.4	Stage inspection by Kenya Power				
	Insulating material	-	-	-	-
4.4.3.1	Separation of windings for cooling and ease of repair				
	Insulation sleeves material				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 50 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>		BIDDER'S OFFER				
			50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42	
	Interlayer insulation material						
4.4.3.2	Double layer insulation						
	Temperature class of insulation						
	Crepe paper	Standard of manufacture					
		Type designation or grade					
		Apparent density,					
		Grammage					
		Conductivity of aqueous extract					
		Electric strength in oil					
		Tensile strength	Machine direction				
			Cross machine direction				
	Press paper – Grade type	Standard of manufacture					
		Type designation or grade					
		Apparent density,					
		Grammage					
		Conductivity of aqueous extract					
		Electric strength in oil					
		Tensile strength	Machine direction				
			Cross machine direction				
	Kraft paper/ Celulosic paper	Standard of manufacture					
		Type designation or grade					
		Apparent density					
		Conductivity					
		Air permeability					
	Radial spacer blocks	Standard of manufacture					
		Type designation or grade					
		Electrical and mechanical properties					
4.4.4	Connections						
4.4.4.1	Windings, joints & connections braced/brazed?						
4.4.4.2	Drying in vacuum & impregnating with hot oil						
4.5	Tapping		-	-	-	-	
4.5.1	Tapping range						
4.5.2.	Tapping method and design						
4.5.2.1	Tap changer (ratio	Standard of manufacture					

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 51 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV tap-switch)</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	Type designation or grade				
	Mode of operation				
	Shank diameter				
	Height of ratio tap-switch				
4.5.2.3	Gap between ratio tap-switch top to the inside of the tank				
4.5.2.4	Tap switch position number 1, orientation				
4.6	Core and Flux Density	-	-	-	-
4.6.1	Core				
	Standard of manufacture of core material				
4.6.1.1	Type designation or Grade of core steel				
	Insulating material for CRGO to prevent corrosion				
4.6.1.2	Thickness of each single lamination				
	Net core area, mm ²				
	Number of turns on LV, per phase				
	Stack factor/Building factor				
	Weight of core, kg				
	Specific loss in watts/kg (at 1.6T flux density)				
4.6.1.3	Static discharges & local heating				
4.6.1.4	Assembled core free from distortion				
4.6.1.5	Cooling for core				
4.6.1.6	Movement of core during transportation or in service				
4.6.1.7	Core clamping				
4.6.1.8	Lifting lugs for core, winding and complete transformer. Factor of safety at least 2.				
4.6.1.9	Oil pockets & trapping of air				
4.6.1.10	Insulation withstand of core to bolts and core to frame				
4.6.2	Flux density	-	-	-	-
4.6.2.1	Effect of primary voltage variations on flux density				
4.6.2.2	Maximum flux density				
	Lowest limit of flux density				
4.6.2.3	Allowable maximum flux density	1 min			
		5 s			
4.6.2.4	Flux density at which core saturates				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
4.6.2.5	Magnetization curve and design calculations				
4.7	Losses	-	-	-	-
4.7.1	Short-circuit Impedence, %				
	Resistance at 75°C of MV Winding in ohms (at normal & extreme taps)				
	Resistance at 75°C of LV Winding in ohms				
	Minimum efficiency at 100% load (unity power factor), at 75°C				
	Total losses (no-load + load losses) at 100% load				
	No-load Losses at 75°C				
	Load Losses at 50% load, 75°C				
	Load Losses at 75% load, 75°C				
	Load Losses at 100% load, 75°C				
	I ² R component of load losses at 100% load, 75°C				
	Load Losses at 125% load, 75°C				
	Stray Losses at 50% load, 75% load, 100% load and 120% load, all at 75°C				
	Total losses at maximum tap				
	Total losses at Minimum tap all at 75°C				
4.7.2	Sound power level				
4.7.3	No-load and Load Losses shall be submitted in the tender				
4.7.4	Capitalization				
4.8	Bushings and clearances	-	-	-	-
4.8.1.1	Open, outdoor & weatherproof bushings to IEC 60137				
4.8.1.2	Bushings to be changed without opening transformer				
4.8.1.3	HV bushings to be polymeric or porcelain. Specify				
4.8.1.4	33kV Bushings complete with surge diverter bracket and arcing horns				
4.8.1.5	LV bushings shall be two part, bottom in toughened epoxy and top in porcelain, brown				
4.8.1.6	Neutral bushing identical to LV phase bushing				
4.8.1.7	Spacing & clearances				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-
02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 53 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
4.8.1.8	Creepage distance of bushings: HV, LV, N				
	Coastal regions Creepage distance of bushings: HV, LV, N				
4.8.1.9	Clamp type bushing terminals for aluminum conductor				
	Materials, size and drawings for terminal connectors				
4.8.1.10	Marking and method of marking of terminals				
4.8.1.11	Continuous current rating of each bushing				
4.8.2	Clearances				
4.8.2.1	External air clearances				
4.8.2.1.1	Adequate to withstand impulse withstand test voltages				
4.8.2.1.2	Position of fittings & accessories not to interfere with external connection to bushing terminals				
4.8.2.1.3	Minimum external clearances & creepage				
	LV, mm (cable box)				
	Phase to phase				
	Phase to earth				
	Creepage distance				
	11kV, mm (cable box)				
	Phase to phase				
	Phase to earth				
	Creepage distance				
	33kV, mm (open)				
	Phase to phase				
	Phase to earth				
	Creepage distance				
4.8.2.2	Internal clearances				
	Minimum radial clearance of LV coil and core, mm				
	Minimum radial clearance of LV coil and earth, mm				
	Minimum radial clearance between LV and HV, mm				
	Minimum electrical clearance between the surface of the tank and tapping leads, mm				
	Minimum radial clearance between HV and HV windings, mm				
4.9	Insulation Levels (internal)				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31


Page 54 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	LV: Power frequency withstand voltage				
	11kV: Lightning impulse & power frequency withstand voltages				
	33kV: Lightning impulse & power frequency withstand voltages				
	External insulation level and altitude correction (indicate offered insulation and altitude correction applied)				
4.10	Transformer Tank & Tank Cover	-	-	-	-
4.10.1	Bolted top cover design				
	Minimum thickness of top cover, bottom and sides of offered transformer respectively				
4.10.2	Inside clearance				
4.10.3	Pressure test of tank and test report during delivery				
4.10.4	Lifting lugs and factor of safety				
4.10.5	Steel radiators				
4.10.6	Top cover design, non-accumulation of rain water, gasket & non-standard bolts and nuts				
4.10.7	4 non-standard bolts on top cover				
4.10.8	Removable jumper of 25mm x 1.2mm tinned copper & stainless steel bolt & nut				
4.11	Paint Work	-	-	-	-
4.11.1	Method of cleaning before painting				
4.11.2	Final colour of exterior surfaces and paint thickness				
4.11.3	Cleaning and painting of interior of tank and other oil filled chambers				
4.11.4	Degreasing & treatment of radiators with anti-rust inhibitor				
4.11.5	Final color of exterior of radiators & paint thickness & painting method				
4.12.1	Fittings and Accessories	-	-	-	-
4.12.1(a) i	Pressure at which pressure relief device operates				
ii	Pressure Relief Device & location				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 55 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
4.12.1 (b)	Oil Level Gauge & location				
4.12.1 (c)	Earthing Terminals: location & to have stainless steel bolt, nut & washer and tinned copper terminal lug for 50mm ² conductor				
4.12.1 (d)	Separate Lifting lugs for core, top cover, conservator & complete transformer				
4.12.1 (e)	Off-circuit tap changer & location				
4.12.1 (f)	Tinned copper jumper size and materials				
4.12.1 (g)	Rating and diagram plate				
4.12.1 (h)	Clamp connectors				
4.12.1 (i)	Jacking Lags				
4.12.1 (j)	Combined drain plug and sampling device				
4.12.1 (k)	Surge arrester mounting brackets	Mounting Brackets dimensions			
		Universal type			
		Galvanized to ISO 1461			
4.12.1 (l)	Arcing horns				
4.12.2	Features to deter oil vandalism				
4.12.3	Detailed drawings				
4.12.4	Transformer mounting rails at bottom				
4.13	Transformer Oil – technical particulars shall be as per KP1/6C.1/13/TSP/08/001				
4.14	Surge Arresters technical particulars shall be as per KP1/6C.1/13/TSP/11/32.				
4.15	Quality Management System	-	-	-	-
4.15.1	Quality Assurance Plan to be based on ISO 9001:2008				
4.15.2	Declaration of conformity to IEC 60076				
	Copy of ISO 9001:2008 certificate submitted				
4.15.3	Monthly & annual production capacity				
	List of previous customers				
	Reference letters from at least four previous customers				
5.	Tests and Inspection	-	-	-	-
5.1	Test Standard				
	Responsibility of testing transformer &				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.	KP1/6C.1/13/TSP/10/001-02
Issue No.	5
Revision No.	1
Date of Issue	2015-07-31
Page 56 of 62	

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	manufacturer's capability to carry out specified tests				
5.2	Copies of type test reports to IEC 60076	-	-	-	-
	Lightning impulse withstand test				
	Short circuit withstand test				
	Temperature rise test				
5.3	Acceptance tests at manufacturers premises				
5.3.1	Routine tests to IEC 60076				
5.3.2	Type tests to IEC 60076				
	Temperature rise test				
	Lightning impulse withstand test				
5.3.3	Additional tests (sample test)				
5.3.4	Sampling as per IEC 60410				
5.4	Contact details for testing authority				
5.5	Complete test reports for approval before shipment				
5.6	Inspection or test by KPLC during delivery before acceptance to stores				
6.	Marking, Labeling & Packing	-	-	-	-
6.1	Packing: mounted & bolted on wooden base blocks				
6.2	Dispatch fully assembled & oil filled				
6.3	Assemble & package of items suitably marked				
6.4	Permanent Rating & Diagram plate indelibly marked (by etching, engraving or stamping)				
6.5	Content of marking				
7.1	Tender submitted with all technical documents				
7.2	Successful bidder to submit documents/details for approval before manufacture				
Other details required with the tender	Weight of complete transformer, kg				
	Weight of tank, kg				
	Material of tank				
	Weight of oil, kg				
	Weight of core, kg				
	Weight of HV windings (without insulation), kg				
	Weight of LV windings (without insulation), kg				

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

TITLE:

**SPECIFICATION FOR
DISTRIBUTION TRANSFORMER**

Part 2: Pole Mounted Three
Phase Oil Type Distribution
Transformer

Doc. No.

KP1/6C.1/13/TSP/10/001-02

Issue No.

5

Revision No.

1

Date of Issue

2015-07-31

Page 57 of 62

Clause Number	Description <i>Indicate KVA & voltage ratings in columns on the right 33KV</i>	BIDDER'S OFFER			
		50KVA 33/0.42	100kVA 33/0.42	200kVA 33/0.42	315kVA 33/0.42
	Weight of insulation, kg				
	Manufacturer's experience				
	Detailed list of all the required fittings and accessories indicating type/model number, manufacturer and quantities				
	List catalogues, brochures and technical data submitted to support offer				
	Deviations from tender specifications (indicate supporting documents submitted)				

.....
Manufacturer's Name, Signature, Stamp and Date

-----SPACE LEFT BLANK-----

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

ANNEX C: DRAWINGS – 33kV Bushings Drawings


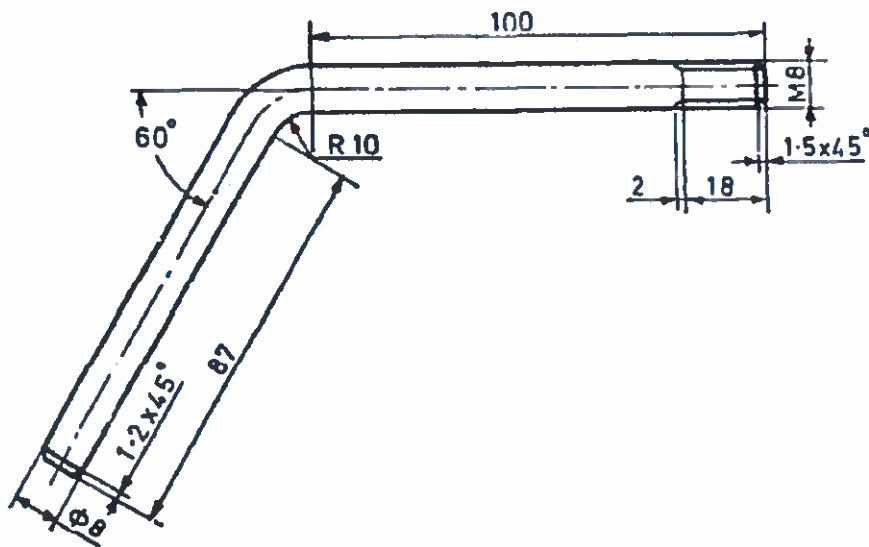


Fig. 1: Upper Spark Gap Horn (For 36 kV/250A Rating) as per DIN 42531-33

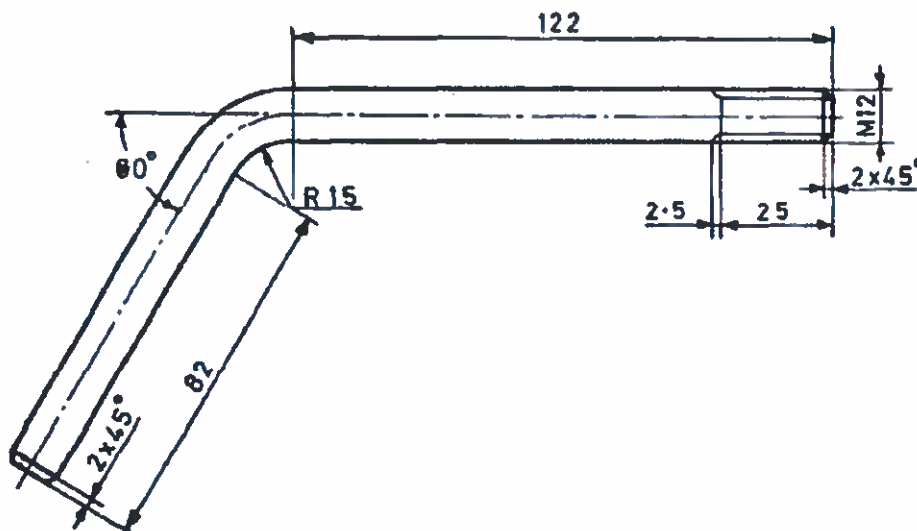

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31

Fig. 2: Upper Spark Gap Horn (For 36 kV/630A Rating) as per DIN 42531-33

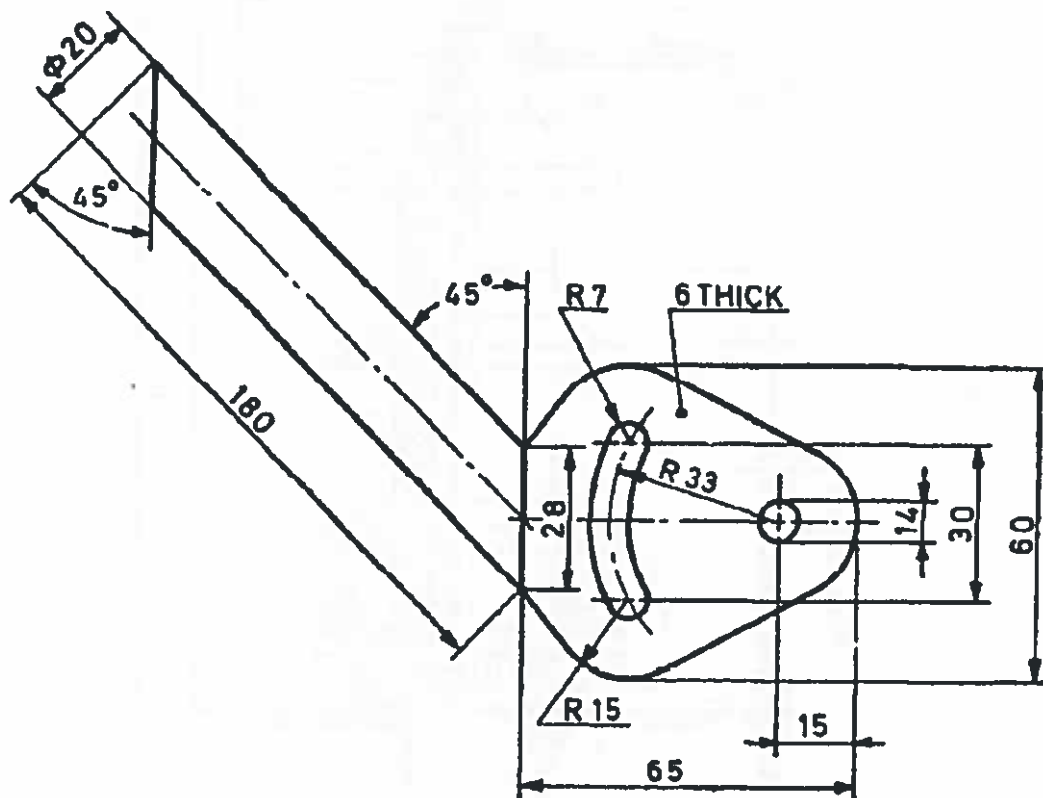


Fig. 4 Lower Spark Gap Horn (For 36 kV/ 250A - 630A Rating) as per DIN 42531-33

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

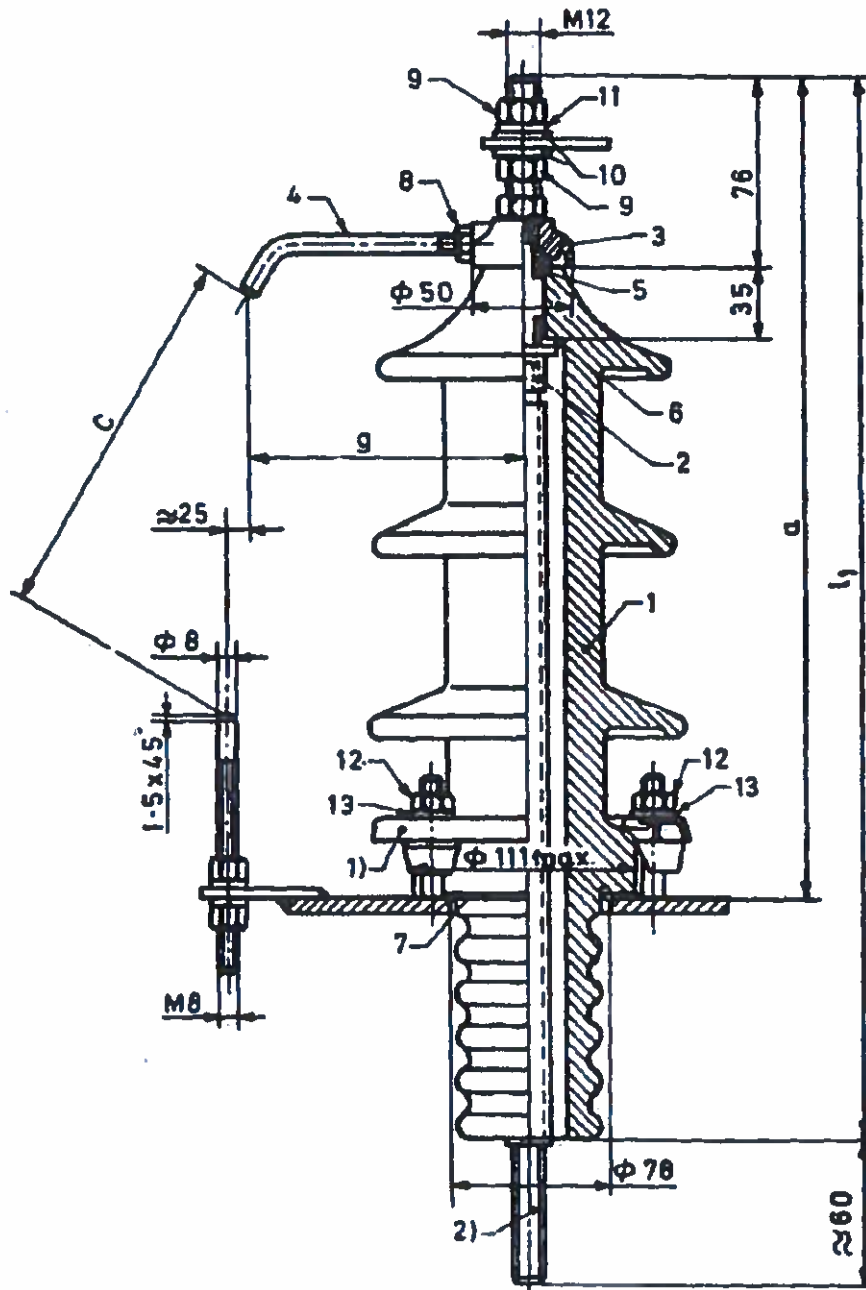


Table 14: Dimensions

Bushing rating	a	r	g	l ₁
36 kV/250A	485	220	170	755

Fig. 6: Bushing Assembly for (For 36 kV/250A, 630A Rating) as per DIN 42531-33

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

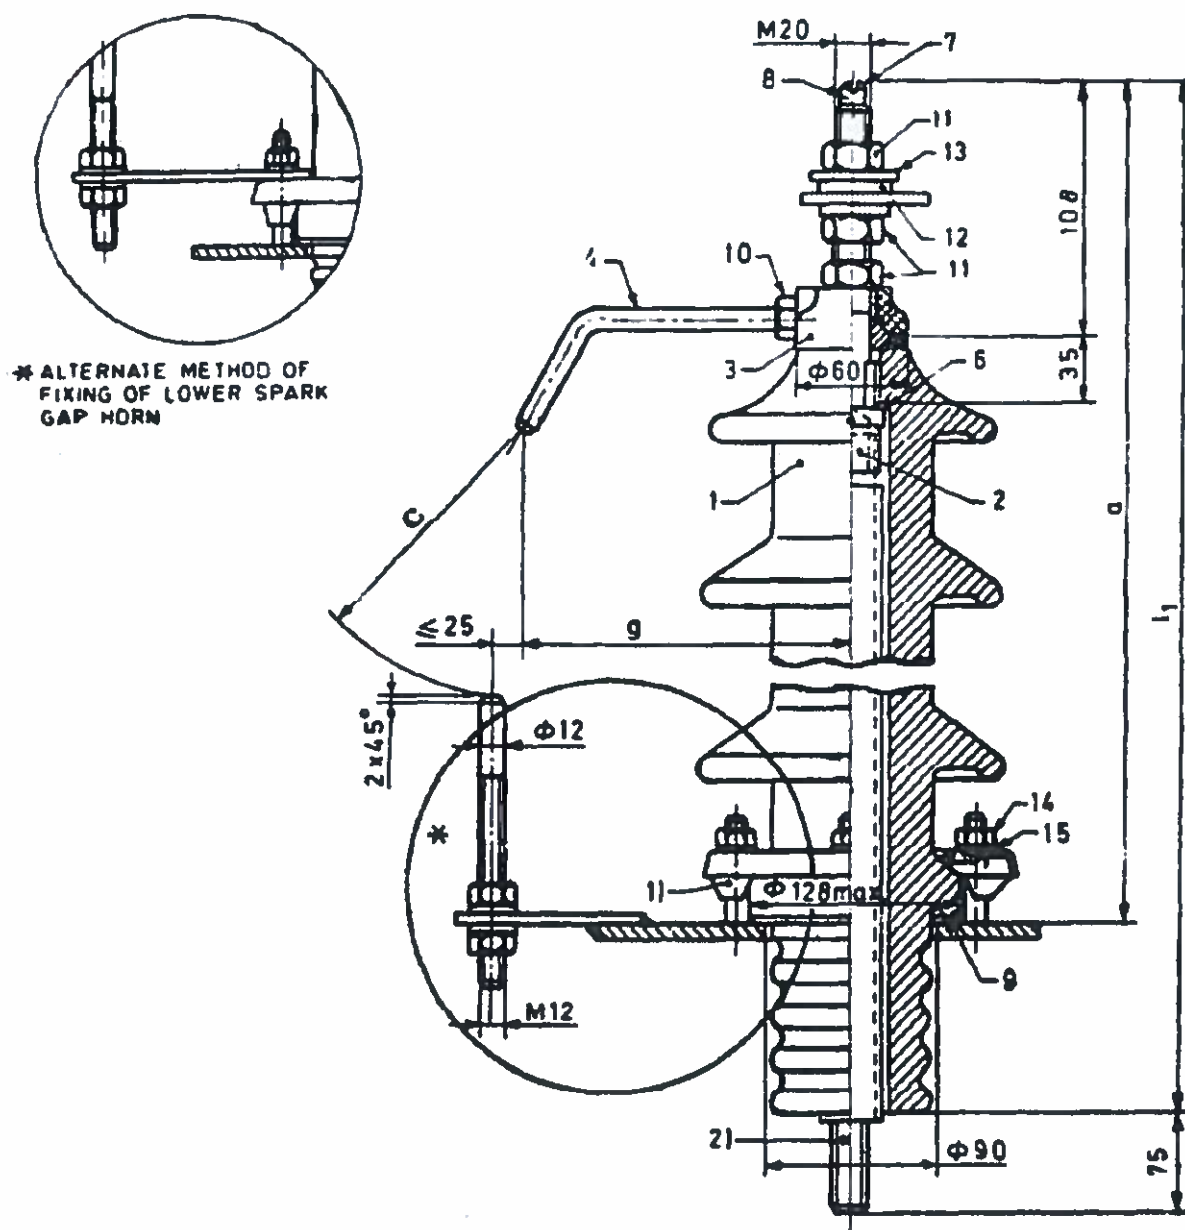


Table 15: Dimensions

Bushing rating	a	r	g	l ₁
36 kV/250A	522	220	200	792

Fig. 6: Bushing Assembly for (For 36 kV/630A Rating) with copper stem as per DIN 42531-33

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed: 

Signed: 

Date: 2015-07-31

Date: 2015-07-31

ANNEX C: LIST OF SUB CONTRACTOR

The supplier shall provide a list of important raw materials, names of sub- suppliers for the raw materials, their address, telephone, email, website, contact persons and, list of standards to which materials are tested. The list shall be as per, but not limited to, table below

Table 12: LIST OF SUB CONTRACTOR

S/N	Item	Name of supplier	Place manufacture	of	Place of testing inspection	Testing standard
1	Laminations					
2	Aluminum/copper windings					
3	Insulated winding wires					
4	Cooling oil					
5	Press boards					
6	Kraft paper					
7	MS plates, angles & channels					
8	Gaskets					
9	Bushings HV/LV					
10	Paints					
11	Tap changer					
12	Lighting Arrestor					
13	Current transformer(where applicable)					
14	Pressure relief					

Note: The successful bidder shall within 30 days of placement of order submit the above information regarding list of materials as well as bought out accessories, the names of sub –suppliers selected from those furnished along the offer. Proof of purchase will ultimately be required.

Issued by: Head of Section, Standard development

Authorized by: Head of Department , Standards

Signed:



Signed:



Date: 2015-07-31

Date: 2015-07-31