

### TITLE:

# SPECIFICATION FOR FLOOD LIGHTS

p	Doc. No.	KP1/3CB/TSP09/079
	Issue No.	1
	Revision No.	0
	Date of Issue	2015-02-05
	Page 1 of 7	197

#### **TABLE OF CONTENTS**

- 0.1 Circulation List
- 0.2 Amendment Record

#### **FOREWORD**

- 1. SCOPE
- 2. REFERENCES
- 3. TERMS AND DEFINITIONS
- 4. REQUIREMENTS
- 5. TESTS AND INSPECTION
- 6. MARKING AND PACKING
- 7. DEMONSTRATION AND DRAWINGS APPROVAL

ANNEX A: Guaranteed Technical Particulars (to be filled and signed by the <u>Supplier</u> and submitted together with copies of the manufacturer's catalogues, brochures, drawings, technical data, sales records and copies of certificates for tender evaluation)

issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards
Signed: ta	Signed:
Date: 2015-02-05	Date: 2015-02-05



TITLE:

Doc. No.	KP1/3CB/TSP09/079
Issue No.	1
Revision No.	0
Date of Issue	2015-02-05
Page 2 of 7	

### 0.1 Circulation List

COPY NO.		COPY HOLDE	₹			
1		Manager Stand	ards			
2		Supply Chain M	lanager, Pr	ocurement	··	
Electronic	сору	(pdf)	on	KPLC	server	currently:
http://172.16.1	.40/dms/	prowse.php?fFol	derid=23			

### 0.2 Amendment Record

Date	Description of Change	Prepared by	Approved by
(YYYY-MM- DD)		(Name & Signature)	(Name & Signature)
	100000		
			22000
	(YYYY-MM-	(YYYY-MM-	(YYYY-MM- (Name &

Issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards
Signed: Fer	Signed:
Date: 2015-02-05	Date: 2015-02-05



### TITLE:

## SPECIFICATION FOR FLOOD LIGHTS

_		
	Doc. No.	KP1/3CB/TSP09/079
	Issue No.	1
	Revision No.	0
	Date of Issue	2015-02-05
	Page 3 of 7	

#### **FOREWORD**

This specification has been prepared by the Standards Department in collaboration with Transmission Department both of The Kenya Power and Lighting Company Limited (KPLC) and it lays down requirements for Flood Lights. It is intended for use by KPLC in purchasing the items.

#### 1. SCOPE

This specification is for Flood Lights for use by the company's Network Maintenance Teams.

The specification stipulates the minimum requirements for Flood Lights acceptable for use in the company and it shall be the responsibility of the Supplier to ensure adequacy of the design, good workmanship and good engineering practice in the manufacture of the products for KPLC.

The Flood Lights shall be of proven design and it is the responsibility of the Supplier to ensure that the offered design is of the highest quality and guarantees excellent service to KPLC.

#### 2. REFERENCES

Applicable ISO, IEC Standards and Kenya Standards.

References to brand names or catalogue numbers are intended to be descriptive only and not restrictive. The Tenderer may adopt higher standards, brand names, and or catalogue numbers in its Tender, provided that it demonstrates to KPLC's satisfaction that the substitutions ensure equivalence to all requirements of this specification.

#### 3. TERMS AND DEFINITIONS

For the purpose of this specification the terms and definitions given in the reference standard shall apply.

#### 4. REQUIREMENTS

#### 4.1 SERVICE CONDITIONS

The Flood Lights shall be suitable for use outdoors in tropical areas and harsh climatic conditions including areas exposed to sea spray (along the coast), humidity of upto

Issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards
Signed: San ta	Signed:
Date: 2015-02-05	Date: 2015-02-05



Doc. No.	KP1/3CB/TSP09/079
Issue No.	1
Revision No.	0
Date of Issue	2015-02-05
Page 4 of 7	***

90% and average ambient temperature of +30°C with a minimum of -1°C and a maximum of +40°C.

#### 4.2. DESIGN AND CONSTRUCTION

TITLE:

- 4.2.1 The Flood Lights shall be manufactured to applicable ISO Standards, Kenya Standards and the requirements of this specification. All materials used shall be corrosion resistant.
- 4.2.2 The Flood Lights shall be designed for heavy duty applications and shall comprise a set of four (4) energy saving 500W mobile floodlights suitable for outdoor use.
- 4.2.3 The Flood Lights shall have the following features/properties:
  - a) Span angle of 60 degrees
  - b) Accompanying copper cable of at least 10 metres
  - c) Suitable stand of at least 2.5 metres
  - d) Stand should be able to withstand wind loads of 20Mph
  - e) Adjustable head to aim light where needed
  - f) Operate at 240 Vac ±6%.
- 4.2.4 The Flood Lights shall be of the general arrangement shown in Figure 1:

#### 5 TESTS AND INSPECTION

- 5.1 The Flood Lights shall be inspected and tested in accordance with the requirements of this specification. It shall be the responsibility of the supplier to test or to have all the relevant tests performed.
- 5.2 Copies of previous test certificates by a third party testing laboratory accredited to ISO/IEC 17025 shall be submitted with the offer for evaluation. A copy of the accreditation certificate for the testing laboratory shall also be submitted with the tender (all in English Language). Any translations of certificates and test reports into English language shall be signed and stamped by the Testing Authority.
- 5.3 Test Certificates for the Flood Lights to be supplied shall be submitted to KPLC for approval before shipment/delivery of the goods.
- 5.4 On receipt of the Flood Lights, KPLC will inspect them and may perform or have performed any of the relevant tests in order to verify compliance with the specification. The supplier shall replace without charge to KPLC, Flood Lights which upon examination/inspection, test or use fail to meet any or all of the requirements in the specification.

Issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards
Signed: Ten	Signed:
Date: 2015-02-05	Date: 2015-02-05





Doc. No.	KP1/3CB/TSP09/079
Issue No.	1
Revision No.	0
Date of Issue	2015-02-05

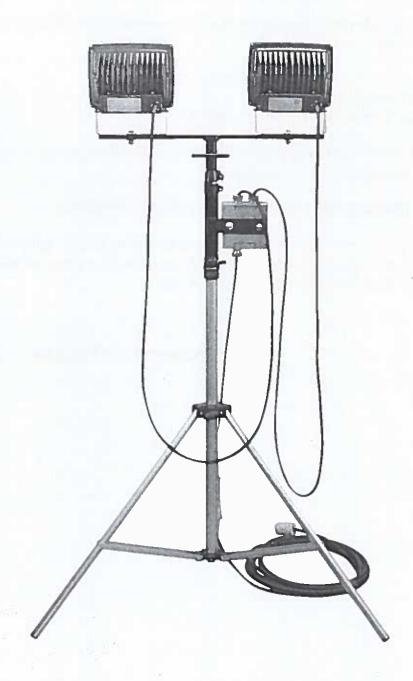


Figure 1: General Arrangement of Flood Lights

Issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards	
Signed:	Signed:	
Date: 2015-02-05	Date: 2015-02-05	



Doc. No.	KP1/3CB/TSP09/079		
Issue No.	1		
Revision No.	0		
Date of Issue	2015-02-05		
Page 6 of 7			

#### 6. MARKING AND PACKING

- 6.1 The following information shall be marked legibly and in a permanent manner on each Flood Lights:
  - a) The manufacturer's identity;
  - b) Model Number;
  - c) The words "Property of KPLC".

TITLE:

6.2 Each Flood Lights shall be packed in a manner so as to protect it from damage during transportation and storage.

#### 7. DEMONSTRATION AND DRAWINGS APPROVAL

The successful bidder shall demonstrate to KPLC staff (in Nairobi) the use of the Flood Lights and explain the features that guarantee excellent service. This shall be done at the drawings approval stage.

THIS	SPACE	LEFT BI	LANK	
	OI AVE			

Issued by: Head of Section, Standards Development	Authorized by: Head of Department, Standards	
Signed: 200 te	Signed:	
Date: 2015-02-05	Date: 2015-02-05	



### TITLE:

# SPECIFICATION FOR FLOOD LIGHTS

Doc. No.	KP1/3CB/TSP09/079	
Issue No.	1	
Revision No.	0	
Date of Issue	2015-02-05	
Page 7 of 7		

ANNEX A:Guaranteed Technical Particulars (to be filled and signed by the <u>Supplier</u> and submitted together with copies of the manufacturer's catalogues, brochures, drawings, technical data, sales records and copies of test certificates for tender evaluation)

Clause number	Bidder's offer (indicate full details of the offered FLOOD LIGHTS for each requirement of the specification)
Manufacturer & country	
Model Number	
1 Scope	
2 Applicable Standards	
3 Terms & Definitions	
4.1 Service Conditions	
4.2 Design & Construction	
4.2.1	
4.2.2	
4.2.3	
4.2.4	
5 Tests & Inspection	
5.1	
5.2	
5.3	
5.4	
6 Marking and Packaging	
6.1	
6.2	
7 Demonstration and drawings approval	

Supplier's Name, Signature, Stamp and Date

Issued by: Head of Section, Standards Development

Signed:

Date: 2015-02-05

Authorized by: Head of Department, Standards

Date: 2015-02-05

.